




User Morten Bulow Andersen

2.0.1

Verification Unit cooler

12-08-2020

Inlet air temperature	[°C]	4.0	Evaporating temperature [Dew]	[°C]	-4.0
DT [Dew]	[Δ°C]	8.0	Refrigerant		R449A
Minimum number of units in room		0			
Heat exchanger		Aluminium fin	Casing		Standard
Fan motor feed		Standard	Type of fan motor		AC motors
Defrost		Absent			
Selected model:	1 x GCE 252G6				
Capacity	[kW]	3.20	Margin	[%]	0.0
DT [Dew]	[Δ°C]	8.0	Tot. air flow	[m³/h]	1695.0

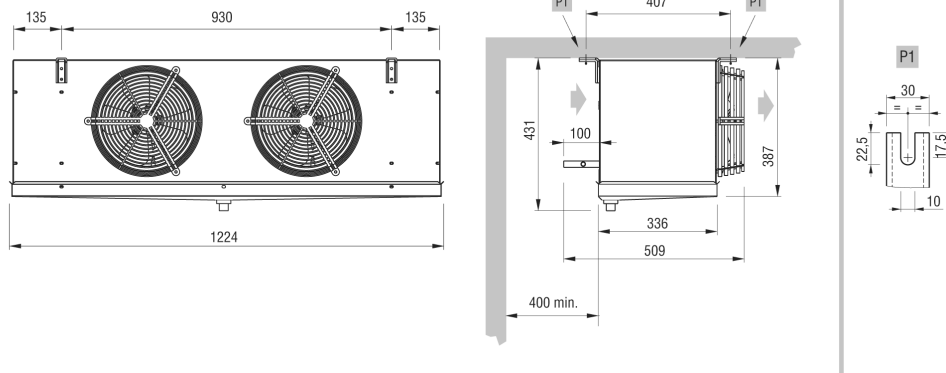

Weight	kg	20.000			
Internal surface	m²	1.10	External surface	m²	9.94
Inlet connection		12 mm	Output connection		22 mm
Total circuit capacity	dm³	1.6	Fin spacing	mm	6
Drain connection		1" GAS			
Fan Motors	n.	2	Diameter	mm	250
Air flow	m³/h	1695	Air throw	m	10.0
Feed	V	230/1/50-60	Rotation speed	rpm	1300
Fan Motor	A	1.36	Absorbed power	W	190
Tot. Pres.S.Lev. 10 m.	dB(A)	34			

N.B.: we shall not be liable for the performance and the quality of sold products, if fitted or connected fan motor speed regulation or control systems are different from the ones proposed or installed by us.



User Morten Bulow Andersen

2.0.1

Verification Unit cooler

12-08-2020

Heat exchanger

Aluminium fin

Casing

Standard

Fan motor feed

Standard

Type of fan motor

AC motors

Defrost

Absent

N.B.: we shall not be liable for the performance and the quality of sold products, if fitted or connected fan motor speed regulation or control systems are different from the ones proposed or installed by us.