
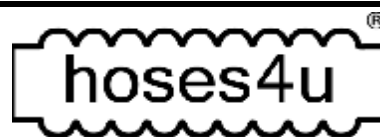


SCIROPPO

Code 4410...0

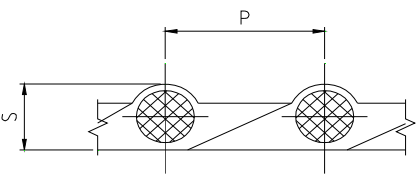

I. Diam. Toll. EN ISO 1307 [mm]	E. Diam. [mm]	Pitch [mm]	Weight +/-5% [g/m]	PN/bar at 20°C [bar]	Coil length max. [m]	
10		5,5				 Description: Suction/discharge hose for liquids, pulverized or grainshaped products, granulates, pellets etc. and only for lead through of non fatty liquid foodstuffs. Vacuum: 0,7 bar Temperature range: -15 °C / +60 °C Construction PVC transparent, smooth, embedded PVC spiral, ivory. Bending radius: 4x inside diameter Norm: EC 1935/2004, LFGB, EU 10/2011 category: A-B-C-E food contact 5 min / 40°C. Contact ratio: 64 cm² / 60 ml.
12		6,0				
13		6,0				
14		6,0				
16		6,5				
18		7,0				
19		7,0				
20	26	7,0	230	8	50	
22	28	7,0	250	7,5	50	
25	31	7,5	280	7	50	
28	34	8,0	320	6,5	50	
30	37	8,0	340	6,5	50	
32	39	8,0	380	6	50	
35	42	8,5	430	6	50	
38	45	8,5	480	6	50	
40	47	8,5	520	6	50	
42		8,5				
45	53	8,5	640	5,5	50	
51	59	9,5	750	5	50	
55	64	10,0	860	5	50	
60	69	10,0	970	4,5	50	
63	72	10,25	1000	4	50	
65	74	10,5	1050	4	50	
70	80	10,5	1150	3,5	50	
76	86	11,0	1350	3,5	50	
80	91	11,0	1520	3,5	50	
90	102	13,0	1800	3	50	
102	114	13,0	2200	3	50	
110	123	13,0	2500	3	50	
120	133	13,0	2800	3	30	
127	141	15,0	3200	3	30	
130		15,0				
140		15,5				
152	168	15,5	4350	2,5	30	
160		15,5				
180		15,5				
203		20,0				
254		24,0				
305		28,0				