


TECHNICAL SHEET



ASSEMBLED CODE	4505SAA
DESCRIPTION	Polymer concrete channel MOD. BASE 100, c/w S235JR steel inlay pressure-locked grating, 20x2-10x2, 33x11 heelguard mesh, installed, hot-dip galvanised. Channel average runoff section sqcm. 62. Load class B125 according to EN 1433:2008 Norm, if installed following manufacturer instructions.
PRODUCT LINE	Drainage channel type "M"
STANDARD	EN 1433:2008
LOADING CLASS	B125 - EN 1433:2008
INTENDED USE OR USES OF THE PRODUCT	Collection and channelling of surface water into areas subject to pedestrian and/or vehicle traffic according to the indicated flow rate.
DURABILITY	NPD
1) CHANNEL	4505S
MATERIAL	Polymer Concrete
SERIES TYPE	Base series 100
SECTION TYPE	Standard
PROFILE TYPE	Without profiles
VERSION TYPE	Normal without built-in slope
WATER FLOW LT / SEC	0,5%=4,1 - 1%=5,8 - 1,5%=7,1 - 2%=8,3 - 3%=10,1
2) GRID	4505AA
GRID TYPE	Press-locked
MATERIAL	Carbon Steel S235JR acc. to EN 10025-2:2019
SURFACE FINISH	Hot Dip Galvanizing - UNI 1461

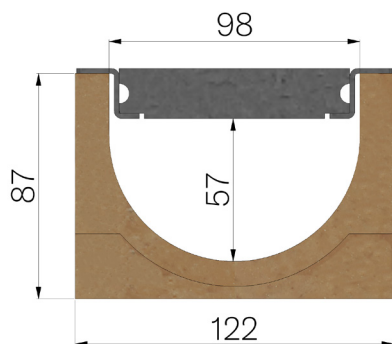

Article dimensions mm	Inner width mm	Runoff section cmq	Weight Kg/each
1000 x 122 x H 87	98	62	10,95