

Unionssæt til brugsvandspumper

Oplev detaljen

Max driftstryk: 25 BAR.

Max driftstemperatur: 100°C.



Materiale: Messing EN 12165-CW617N.

PMA99109T - (1½" x ¾")


PMA99110T - 380694106 (1" x ¾")

PMA99111T - 380692107 (1½" x 1")

PMA99112T - 380692178 (2" x 1¼")

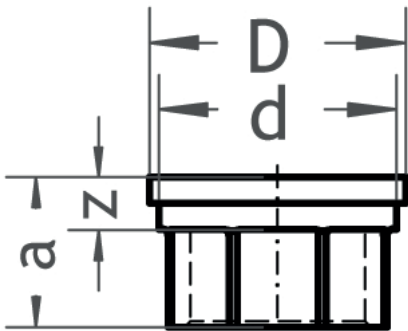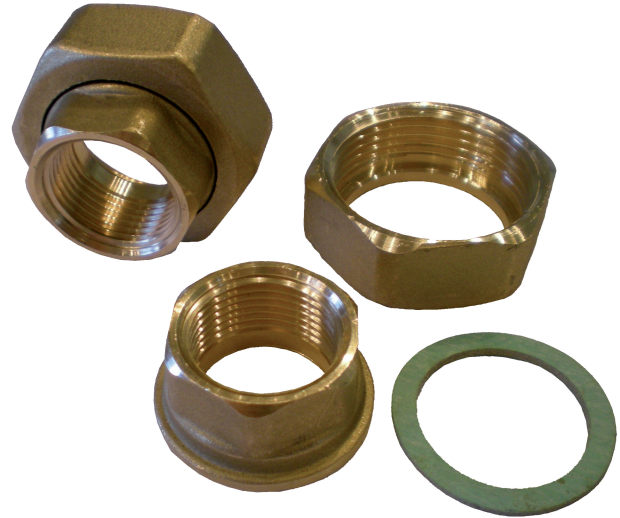

Vare nr.	Gevind (Indv.)	D (mm)	d (mm)	a (mm)	z (mm)
PMA99109T	¾"	58	41	25	12
PMA99110T	¾"	52	35	20	7
PMA99111T	1"	58	42	23	8
PMA99112T	1 ¼"	56	50	24	5

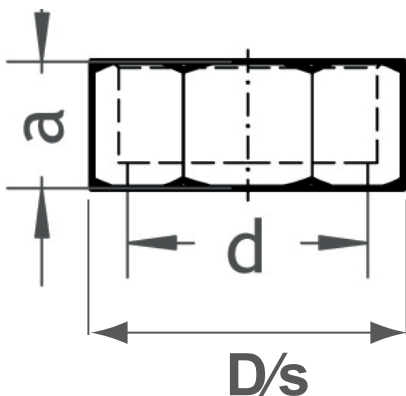

Vare nr.	Gevind (Indv.)	D (mm)	s (mm)	d (mm)	a (mm)
PMA99109T	1½"	58	52	42	18
PMA99110T	1 ¼"	51	46	36	18
PMA99111T	1½"	58	52	42	18
PMA99112T	2"	69	64	51	24

