


Superelastico

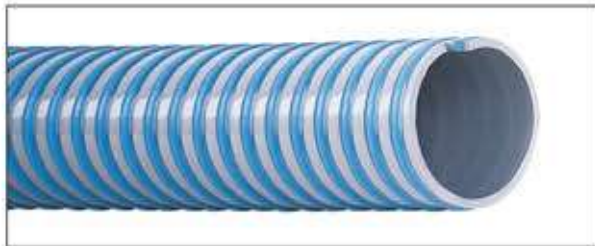

Marking:  SUPERELASTICO - SIZE

Medium duty thermoplastic suction/discharge hose
for industrial water, waste-water, dung a.o. High-quality PVC-compound with rigid PVC spiral, offering an extremely cold flexible hose.

Vacuum	: 0,9 bar
Temperature range	: -25°C / +60°C
Construction	: PVC, grey with blue spiral, inside smooth, outside corrugated
Bending radius	: 3,5 x inner diameter

* Regarding the overpressure we would like to refer to the guidelines for the right use of the hoses which are mentioned on page 4 in this catalogue.

ø Inner mm	Wall mm	ø Outer mm	PN/bar at 20°C*	kg/mtr	Length mtr	Art.-No.
25	4,2	33	7	0,400	50	4450 025000
32	4,7	41	6	0,540	50	4450 032000
38	4,7	47	6	0,650	50	4450 038000
51	5,7	62	5	0,950	50	4450 050000
63	5,7	74	4,5	1,130	50	4450 063000
76	6	88	4	1,600	50	4450 075000
90	6,4	103	3,5	1,850	50	4450 090000
102	6,7	115	3	2,200	50	4450 100000
110	7	124	3	2,400	20	4450 110000
127	8	143	2,5	3,100	20	4450 125000
152	9	170	2	4,200	4/5/6/20	4450 150000
203	12,5	228	1,5	7,800	4/5/6	4450 200000

We recommend assembly with:

couplings system
Perrot:
5721

(see catalogue 17-K P. 21)



couplings system
Bauer:
5710

(see catalogue 17-K P. 20)




Mikalor-Supra-clamps:
6202

(see catalogue 17-K P. 80)



Cutted length possible.

Corruflex/AS

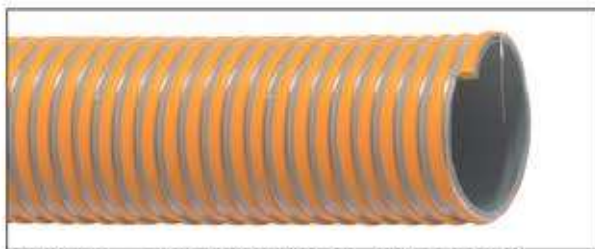

Marking:  CORRUFLEX/AS M - SIZE - STATIC
WIRE-PROD.CODE****

Very flexible new design construction suction/discharge hose.

For industrial water, waste-water, dung a.o. medium duty conditions. High-quality PVC compound with a special designed rigid PVC profile, offering an extremely flexible hose.

Vacuum	: 0,9 bar
Temperature range	: -15°C / +60°C
Construction	: PVC, grey with orange spiral, inside smooth, outside corrugated and a protected antistatic wire.
Bending radius	: 3 x inside diameter

* Regarding the working pressure we would like to refer to the guidelines for the right use of the hoses which are mentioned on page 4 in this catalogue

ø Inner mm	Wall mm	ø Outer mm	PN/bar at 20°C*	kg/mtr	Length mtr	Art.-No.
51	4,5	60	2	0,960	50	4456 050000
76	5,5	87	2	1,600	50	4456 075000
102	7	116	2	2,700	50	4456 100000
127	7,5	142	2	3,450	30	4456 125000
152	8	168	2	4,600	20	4456 150000

Cutted length possible.