
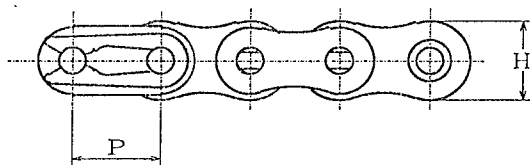
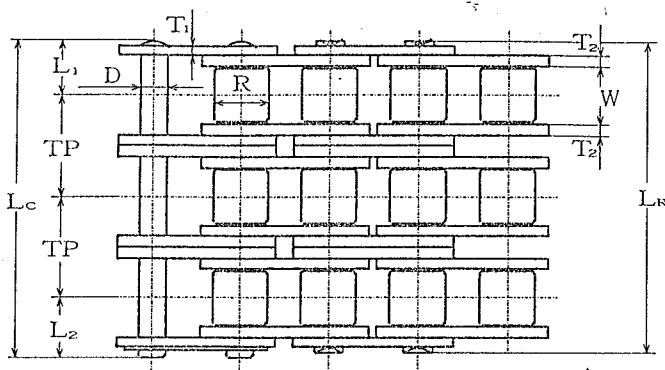


BS Stainless Steel Chains

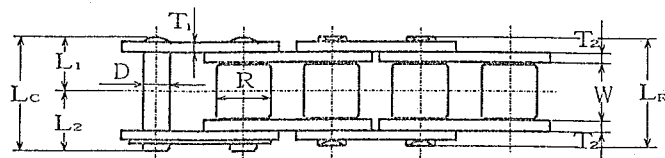

SSS Stainless Steel Chains		
Material	Plate	SUS304
	Pin	SUS304
	Bushing	SUS304
	Roller	SUS304
Shape of Roller		Slide
Max. Allowable Load		150%
Non-Magnetism		○
Heat Resistance		○
Anti-Rust		○
Corrosion Fatigue		×
Anti-Sulfate		△

- ◎ Excelent
 ○ Good
 △ Fair
 × Not Recommended

SY Chain No. No. (BS)	Dimension – (mm)												Minimum	Maximum	
	Pitch	Roller		Pin				Plate			Trans.	Ultimate	Allowable		
		Width	Dia.	Dia.	Length				Heigh	Thickness	Pitch	Strength	Load		
		P	W	R	D	LR	LC	L1	L2	H	T1	T2	TP	(kN)	(kN)
08B SSS-1	12.70	7.75	8.51	4.45	16.7	17.8	8.4	9.4	11.8	1.5	1.5	13.92	10.3	0.7	
08B SSS-2					30.6	31.9								18.0	1.4
08B SSS-3					44.5	45.8								25.8	2.1
10B SSS-1	15.88	9.65	10.16	5.08	19.0	20.6	9.5	11.1	14.7	1.65	1.65	16.59	15.7	1.0	
10B SSS-2					35.6	37.3								31.4	2.0
10B SSS-3					52.4	54.4								47.1	3.0
12B SSS-1	19.05	11.68	12.07	5.72	22.0	23.6	11.0	12.6	16.1	1.8	1.8	19.46	18.1	1.3	
12B SSS-2					41.6	43.1								36.2	2.6
12B SSS-3					61.1	62.7								54.3	3.9
16B SSS-1	25.40	17.02	15.88	8.26	35.1	38.2	17.6	20.6	20.3	3.2	4.0	31.88	42.2	3.0	
16B SSS-2					67.2	70.1								74.3	6.0
16B SSS-3					99.2	102.5								109.7	9.0