

Declaration of Performance

No. 0036DoP9169003-2013-07-09

1. Unique identification code of the product-type

System chimneys with plastic flue liners
EN 14471:2005

2. Type, batch or serial number or any other element allowing identification of the construction product as required under Article 11(4)

Designation 0.1

T120 H1 O W 2 O20 I D L

single wall system chimney

flue material: PP

enclosure: none

Designation 0.2

T120 H1 O W 2 O00 I D L1

concentric system chimney

flue material: PP

enclosure: plastic

Designation 0.3

T120 H1 O W 2 O00 E D L0

concentric system chimney

flue material: PP

enclosure: steel, aluminum

Designation 0.4

T120 H1 O W 2 O00 E D L0

concentric system chimney

flue material: PP

enclosure: stainless steel

Designation 0.5

T120 H1 O W 2 O00 I D L0

concentric system chimney

flue material: PP flexible

enclosure: mineral, metallic

3. Intended use or uses of the construction product, in accordance with the applicable harmonised technical specification, as foreseen by the manufacturer

Convey products of combustion to the outside atmosphere, convey air for combustion where required

4. Name, registered trade name or registered trade mark and contact address of the manufacturer as required under Article 11(5):

Centrotec Sustainable AG

Am Patbergschen Dorn 9

D-59929 Brilon

Tel. +49 (0) 2961. 96 631-0

5. Where applicable, name and contact address of the authorised representative whose mandate covers the tasks specified in Article 12(2)

Not applicable

6. System or systems of assessment and verification of constancy of performance of the construction product as set out in CPR, Annex V

System 2+, System 3

7. In case of the declaration of performance concerning a construction product covered by a harmonised standard

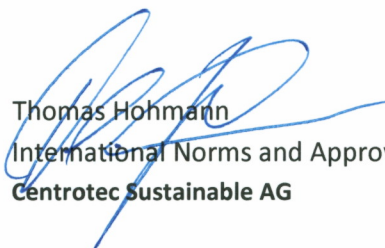
Notified factory production control certification body No. 0036 performed the initial inspection of the manufacturing plant and of factory production control and the continuous surveillance, assessment and evaluation of factory production control and issued the certificate of conformity of the factory production control

8.	Declared performance			
	Essential Characteristics	Performance		Harmonized technical Specification
	Compressive strength (maximum height)	0.1 (DN60 – DN400)	50 m	EN 14471:2005
		0.2 (DN60/100 – DN125/186)	50 m	
		0.3 (DN60/100 – DN200/300)	50 m	
		0.4 (DN60/100 – DN400/500)	50 m	
		0.5 (DN50 – DN160)	30 m	
	Resistance to wind load (free standing height above last support)	0.3 (DN60/100 – DN200/300)	1,5 m	EN 14471:2005
		0.4 (DN60/100 – DN400/500)	1,5 m	
	Resistance to wind load (maximum length between supports)	0.1 (DN60 – DN400)	2 m	EN 14471:2005
		0.2 (DN60/100 – DN125/186)	2 m	
		0.3 (DN60/100 – DN200/300)	2 m	
		0.4 (DN60/100 – DN400/500)	2 m	
		0.5 (DN50 – DN160)	2 m	
	Fire resistance (temperature class, sootfire resistance class, distance to combustibles, outer wall class, way of testing)	0.1 (DN60 – DN400)	T120 O20 L	EN 14471:2005
		0.2 (DN60/100 – DN125/186)	T120 O00 L1	
		0.3 (DN60/100 – DN200/300)	T120 O00 L0	
		0.4 (DN60/100 – DN400/500)	T120 O00 L0	
		0.5 (DN50 – DN160)	T120 O00 L0	
		(tested fully enclosed with ventilated gap)		
	Gas tightness (pressure class)	H1		EN 14471:2005
	Thermal performance (temperature class)	T120		EN 14471:2005
	Dimensioning	0.1 DN60, DN75, DN80, DN90, DN100, DN110, DN125, DN160, DN200, DN250, DN315, DN400		EN 14471:2005
		0.2 DN60/100, DN75/125, DN80/125, DN100/150, DN110/160, DN125/186		
		0.3 DN60/100, DN75/125, DN80/125, DN100/150, DN110/160, DN125/185, DN160/225, DN160/250, DN200/300		
		0.4 DN60/100, DN75/125, DN80/125, DN100/150, DN110/160, DN125/185, DN160/225, DN200/300, DN250/350, DN315/400, DN400/500		
		0.5 DN50 (58/50), DN80 (83/75), DN110 (110/100), DN125 (140/127), DN160 (173/155)		
	Thermal resistance in m ² K/W	R00		EN 14471:2005
	Flow resistance of chimney sections (r = mean value of roughness of the inner wall)	0.1 (DN60 – DN400)	0,5 mm	EN 14471:2005
		0.2 (DN60/100 – DN125/186)	0,5 mm	
		0.3 (DN60/100 – DN200/300)	0,5 mm	
		0.4 (DN60/100 – DN400/500)	0,5 mm	
		0.5 (DN50)	0,5 mm	
		0.5 (DN80)	1,0 mm	
		0.5 (DN110)	1,3 mm	
		0.5 (DN125)	5 mm	
		0.5 (DN160)	5 mm	

	Flow resistance of chimney fittings (ζ =coefficient of flow resistance)	According to EN 13384-1	EN 14471:2005
	Flexural tensile strength (real length of the lateral displacement)	1,5 m	EN 14471:2005
	Flexural tensile strength (maximum inclination)	0.1 (DN60 – DN400) 87° 0.2 (DN60/100 – DN125/186) 87° 0.3 (DN60/100 – DN200/300) 87° 0.4 (DN60/100 – DN400/500) 87° 0.5 (DN50 – DN160) 45°	EN 14471:2005
	Durability against chemicals (condensate resistance class)	W	EN 14471:2005
	Durability against chemicals (corrosion resistance class)	2	EN 14471:2005
	Durability against UV (location class)	0.1 (DN60 – DN400) I 0.2 (DN60/100 – DN125/186) I 0.3 (DN60/100 – DN200/300) E 0.4 (DN60/100 – DN400/500) E 0.5 (DN50 – DN160) I	EN 14471:2005
	Durability against thermal load	T120	EN 14471:2005
	Reaction to fire	D	EN 13501-1
9.	The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 8. This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4.		

On behalf of the manufacturer

Brilon, July 09 – 2013


Thomas Hohmann
International Norms and Approval Officer,
Centrotec Sustainable AG

(Annex)

Centrotec Sustainable AG Members Contact information

Contact Information Head Office

Centrotec Sustainable AG

Am Patbergschen Dorn 9

D-59929 Brilon Germany

Tel. +49 (0) 2961. 96 631 - 0

info@centrotec.de

Contact Information EU Affiliates



Ubbink BV

Verhuellweg 9

NL - 6984 AA Doesburg The Netherlands

Tel. +31 (0) 313 480 200

info@ubbink.nl



Ubbink NV/SA

Jan Samijnstraat 9

B - 9050 Gentbrugge Belgium

Tel. +32 (0) 923 711 00

info.bouw@ubbink.be



Ubbink UK Ltd.

Unit 33 Liliput Road

Brackmills Industrial Estate

Northampton NN4 7DT United Kingdom

Tel. +44 (0) 1604 433000

info@ubbink.co.uk



Ubbink France S.A.R.L.

13, rue de Bretagne

F - 44243 La Chapelle Sur Erdre Cedex France

Tel. +33 (0) 251 134 646

ubbink@ubbink.fr



UBBINK IBERICA

Cami Vell de Vic, 12, P.I. Congost

08520 LAS FRANQUESAS DEL VALLÉS

(BARCELONA) Spain

Tel. +34 91 1863094

ubbink@ubbink.es



CENTROTHERM

Systemtechnik GmbH

Am Patbergschen Dorn 9

D - 59929 Brilon Germany

Tel. +49 (0) 2961 96 70-0

info@centrotherm.com



CENTROTHERM

Gas Flue Technologies Italia S.R.L.

Via Antonio Meucci 1

I - 37024 Arbizzano VR Italy

Tel. +39 (0) 45 60 20 433

info@centrotherm.it