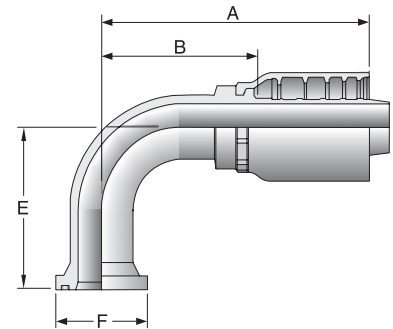


14N77**SAE Code 61 Special Flange Head - 90° Elbow - 5,000* psi**

ISO 12151-3-E90M-L

#	Flange	Hose I.D.	A		E		F	B		Additional Material Stainless Steel (C)
Part Number	inch	inch	inch	mm	inch	mm	inch	inch	mm	
14N77-20-16	1-1/4	1	4.72	119,9	2.76	70,0	2	2.77	70,3	
14N77-20-20	1-1/4	1-1/4	6.28	159,5	3.54	90,0	2	4.00	101,8	•
14N77-20-24	1-1/4	1-1/2	6.69	169,9	4.09	104,0	2	4.30	109,2	
14N77-24-20	1-1/2	1-1/4	6.28	159,5	3.54	90,0	2-3/8	4.00	101,8	
14N77-24-24	1-1/2	1-1/2	7.24	183,9	4.09	104,0	2-3/8	4.85	123,2	•
14N77-24-32	1-1/2	2	7.65	194,2	5.43	138,0	2-3/8	4.89	124,2	
14N77-32-24	2	1-1/2	7.24	183,9	4.09	104,0	2-13/16	4.85	123,2	
14N77-32-32	2	2	8.75	222,1	5.43	138,0	2-13/16	5.99	152,2	


*Must be used with 5050HK Flange Kits

**16A77****SAE Code 62 Flange Head**

ISO 12151-3-S-S

#	Flange	Hose I.D.	A		F	B		Additional Material Stainless Steel (C)
Part Number	inch	inch	inch	mm	inch	inch	mm	
16A77-8-8	1/2	1/2	3.51	89,3	1-1/4	2.29	58,3	
16A77-8-10	1/2	5/8	3.83	97,3	1-1/4	2.48	63,0	
16A77-12-10	3/4	5/8	2.95	74,9	1-5/8	1.60	40,7	
16A77-12-12	3/4	3/4	4.49	113,9	1-5/8	2.85	72,5	•
16A77-12-16	3/4	1	4.96	126,0	1-5/8	3.01	76,5	
16A77-16-12	1	3/4	3.47	88,1	1-7/8	1.83	46,6	
16A77-16-16	1	1	4.45	113,0	1-7/8	2.50	63,5	•
16A77-16-20	1	1-1/4	5.66	143,8	1-7/8	3.39	86,1	
16A77-20-16	1-1/4	1	4.05	102,9	2-1/8	2.10	53,4	•
16A77-20-20	1-1/4	1-1/4	5.73	145,6	2-1/8	3.46	87,8	•
16A77-20-24	1-1/4	1-1/2	6.06	153,9	2-1/8	3.67	93,2	
16A77-24-16	1-1/2	1	4.25	108,0	2-1/2	2.30	58,4	
16A77-24-20	1-1/2	1-1/4	4.65	118,1	2-1/2	2.38	60,4	•
16A77-24-24	1-1/2	1-1/2	6.39	162,3	2-1/2	4.00	101,6	•
16A77-32-24	2	1-1/2	5.23	132,8	3-1/8	2.84	72,2	
16A77-32-32*	2	2	7.17	182,1	3-1/8	4.41	112,0	•

*This specific size in stainless is not able to be crimped in any Parkrimp machine.

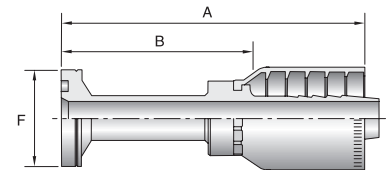**Refer to Pressure Rating of Hose End Connections Chart on page E-47.**

See Accessories Section for O-Rings and Flange Kits.