


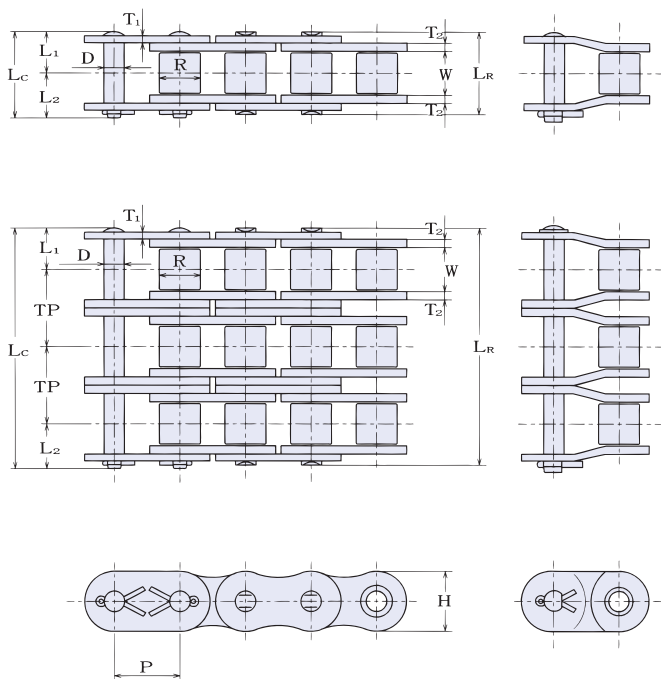

Item	See Page	
Attachment Chain	64	65
Rustless	36	40 42
SLR Self-Lube Chain	51	
MF Maintenance Free	56	76
Drive Chain Selection	76	77

Standard Packing	20B	24B
1 Unit (10')	96P	80P
1 Unit (5m)	158P	132P

20B

SY Chain No. (B S)	Pitch	Dimensions - mm											Minimum Ultimate Strength	Maximum Allowable Load	Average Chain Weight
		Roller		Pin				Plate			Trans. Pitch				
		Width	Dia.	Dia.	Length			Height	Thickness						
	P	W	R	D	L _R	L _C	L ₁	L ₂	H	T ₁	T ₂	TP	kN	kN	kg/m
20B	31.75	19.56	19.05	10.16	40.2	44.0	20.1	23.9	26.4	3.5	4.5	36.45	95	25.5	3.76
-2					76.8	80.6							170	33.3	7.26
-3					113.3	117.2							250	49.0	10.86

24B

SY Chain No. (B S)	Pitch	Dimensions - mm											Minimum Ultimate Strength	Maximum Allowable Load	Average Chain Weight
		Roller		Pin				Plate			Trans. Pitch				
		Width	Dia.	Dia.	Length			Height	Thickness						
	P	W	R	D	L _R	L _C	L ₁	L ₂	H	T ₁	T ₂	TP	kN	kN	kg/m
24B	38.10	25.40	25.40	14.63	53.4	58.1	26.7	31.4	33.4	4.8	5.9	48.36	160	35.7	7.29
-2					101.8	106.5							280	46.8	14.53
-3					150.2	154.9							425	68.8	21.76

※Refer to page 80. "Selection of offset link"