


DATA SHEET: Screw cuffs

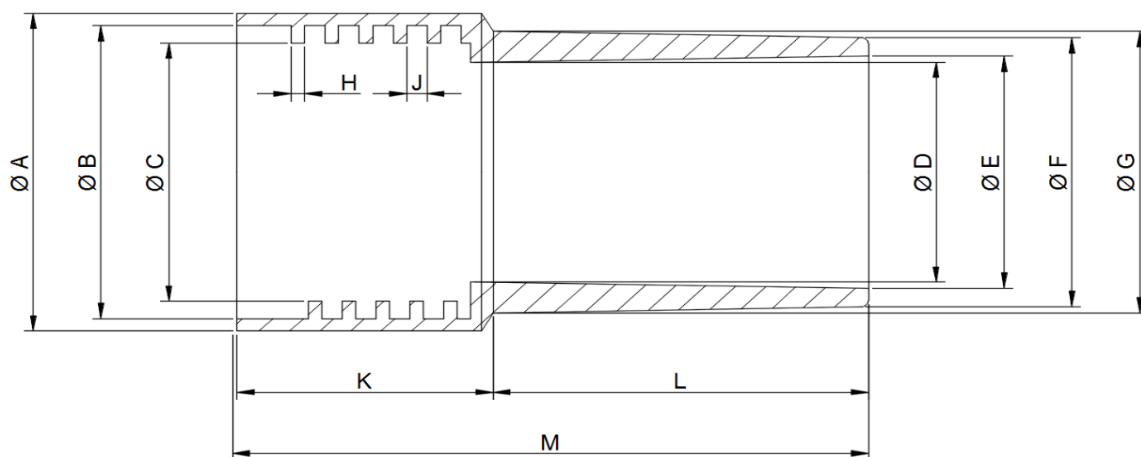

Partnumber		SCREW CUFF			DIAMETER							LENGTH						
			ID	ID	tol + -: 0,5mm							tol + -: 0,5mm						
Condu	standa	name	(mm)	(inch)	A	B	C	D	E	F	G	H	J	pitch	K	L	M	
59696	59691	25mm	25,4	1	36,75	32,75	27,75	25	25,75	32	32,75	2	2,5	4,5	25,5	34,5	60	
59697	59692	32mm	31,8	1 1/4	44,5	40,5	34,5	31	32,25	37,5	38,5	2	4,4	6,4	38	55,5	93,5	
59698	59693	38mm	38,1	1 1/2	52	48	42	37	38	44,5	45,75	2	4,8	6,8	38	55,5	93,5	
59699	59694	45mm	44,5	1 3/4	58,5	54,5	48,5	44	45,5	50	51	2	4,8	6,8	38	55,5	93,5	
59700	59695	50mm	50,8	2	66	62	56	49	51	57	58,5	2	5,2	7,2	38	55,5	93,5	

material: PE-EVA conductive carbon black
 color: black
 screw-thread: left
 Ro Conductive: < 10 exp 6 Ohm

specification may change without notice

Disclaimer: Our technical information, whether given verbally or in writing is based on the best of our current knowledge but given without warranty. It is presented as a general guide only. The proper use and maintenance of the products supplied by us is the sole responsibility of the purchaser and ultimate user of the product. Adequate testing under actual service conditions is necessary to properly establish suitability. We reserve the right to change the specifications without prior notice.

Rw 15/04/2015