

Dato:

Kunde:

Projekt:



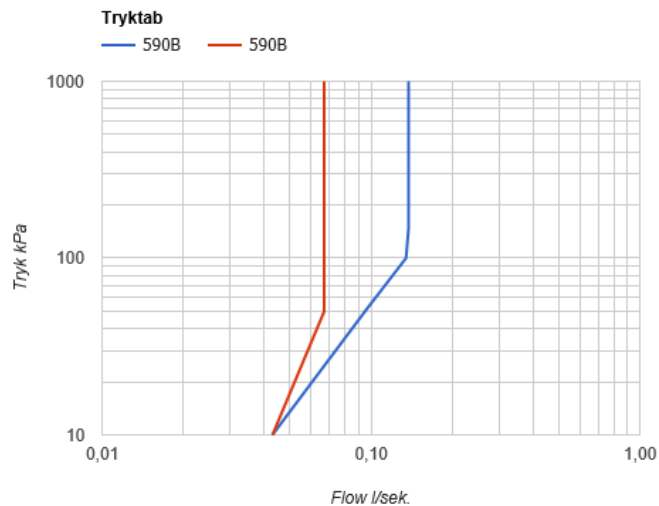
590B

Et-grebsblander med keramisk ventilenhed, til sargmontage 500, svingbar tud 090B med vandbesparende luftindblander. Højde: 185 mm. Hulstørrelse, blander: 42 mm. Hulstørrelse, tud: 22 mm. VVS nr. 715239000, farve 16 krom. VVS nr. 715239081, farve 20 børstet krom. VVS nr. 715239040, farve 40 rustfrit stål.

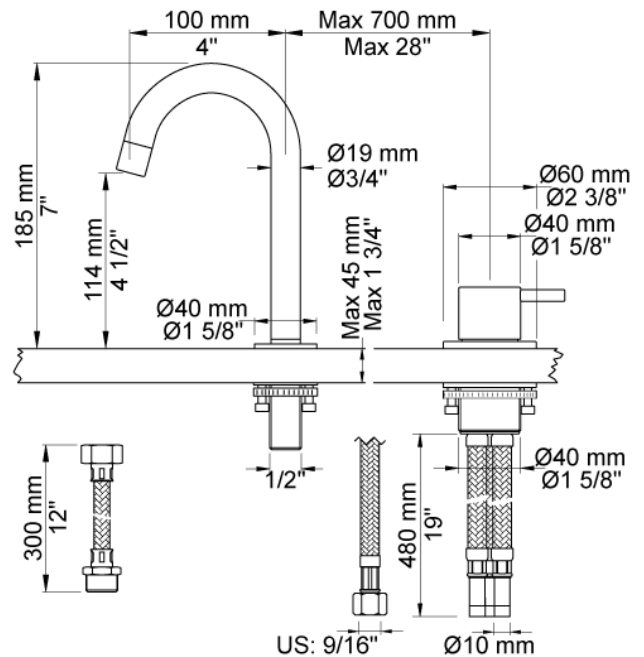
Flow

	Bar:	1,0	2,0	3,0	4,0	5,0
590B	(l/min)	4,8	6,8	8,3	8,3	8,3
590B ¹⁾	(l/min)	2,3	3,3	4,0	4,0	4,0

¹⁾ USA Standard

**Beskrivelse og tekniske data**

Montering	Tilgang nedefra gennem fleksible tilslutningsslange med 10mm studs eller gennem 10mm CU-rør
Støjgruppe	Støjgruppe 1
Forudsat vandstrøm	0,10
Trykgruppe	Gruppe 150 kPa (Tryktabet over armaturet ved den forudsatte vandstrøm er mellem 50 og 150 kPa)


**Leveres i farverne**

Farve 02, Grå	Farve 17, Blank sort
Farve 04, Blå	Farve 18, Hvid
Farve 05, Orange	Farve 19, Messing natur
Farve 06, Lysegrøn	Farve 20, Børstet krom
Farve 08, Gul	Farve 21, Mørkerød
Farve 09, Koksgrå	Farve 25, Pink
Farve 12, Mokka	Farve 27, Mat-sort
Farve 14, Orange-rød	Farve 28, Mat-hvid
Farve 15, Mørkeblå	Farve 40, Rustfrit stål
Farve 16, Krom	



Technical drawing of a U-bolot with dimensions in mm and inches:

- Overall height: 185 mm (7")
- Top flange width: 100 mm (4")
- Top flange thickness: 14 mm (1/2")
- U-bolot body diameter: Ø19 mm (3/4")
- U-bolot body length: 65 mm (2 1/2")
- U-bolot body diameter: Ø40 mm (Ø1 5/8")
- U-bolot body length: 1/2"



Technical drawing of the 1000 Series 1/2" (25.4 mm) hose end fitting. The drawing shows a side view and a cross-sectional view. The side view dimensions are: total length 480 mm (19"), top section 40 mm (1 1/2"), middle section 55 mm (2 1/8"), and bottom section 19". The cross-sectional view shows a hose with an outer diameter of 60 mm (Ø60 mm) and an inner diameter of 40 mm (Ø40 mm). The fitting has a 1/2" (12.7 mm) diameter. The bottom section has a diameter of 10 mm (Ø10 mm) and a US size of 9/16".