

Absolute AOS Caliper 0-150

Item number: 500-181-30



ABSOLUTE®




Description

This digimatic caliper allows you to take reliable measurements and offers you the following benefits:

- AOS (Advanced Onsite Sensor) induction type encoder used in top-of-the-line ABS coolant-proof calipers
- Thanks to the adoption of the electromagnetic induction type ABS encoder, this caliper can be used without concern for contamination on the scale face during measurement. Detection signal is not affected by dirt (water, oil, etc.) on surface of a scale (except 300 mm type).
- The slider provides smooth, stable and comfortable operation.
- Character height: 9 mm
- ABS (ABSOLUTE) scale requires no origin setting after power-on and has no limit to response speed.

Features

Range:	0 - 150 mm
Depth bar:	flat
Digital output:	No
Mass:	164 g
Digital step:	0.01 mm
Max. response speed:	Unlimited
Battery life:	approx. 18000 hours
Delivered:	In a case, including 1 battery
ORIGIN (ABS-Zero):	Yes
ZERO/ABS:	Yes
ON/OFF:	Yes
Low voltage alarm:	Yes
Digital/Analog:	Digital
Accuracy:	≤ 200 mm : ±0,02 mm / > 200 mm : ±0,03 mm (excluding quantizing error)
Functions:	Without thumb roller
Inch-Metric:	Metric

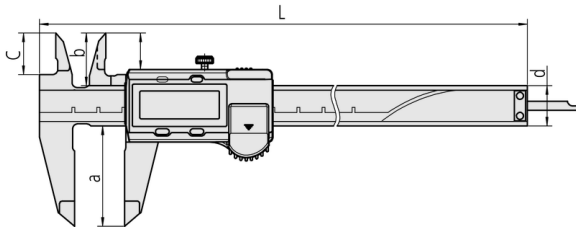

Accessories

Standard accessory of products:



Battery SR44 1.5V
938882



Digimatic Cable, Straight, Data Button, 1m
959149




Digimatic Cable, Straight, Data Button, 2m
959150



U-WAVE-T Connection Cable C, Straight, with Data Button
02AZD790C



USB Input Tool Direct (Digimatic USB)
Digi/Digi2, Straight, with Data Button
06AFM380C



Depth Base Attachment for Caliper, 75mm width for 100, 150, 200mm range
050083-10



Depth Base Attachment for Caliper, 100 mm width for 100mm, 100, 150, 200mm range
050084-10



Depth Base Attachment for Caliper, 125 mm width for 300mm range
050085-10