


Installation guide

XS4 Original+ for Scandinavian modular mortise locks


SALTO
inspired access

- Eng Installation guide
- DK Installations guide
- FIN Asennusohje
- SE Istallationsguide

Si 450 xx series

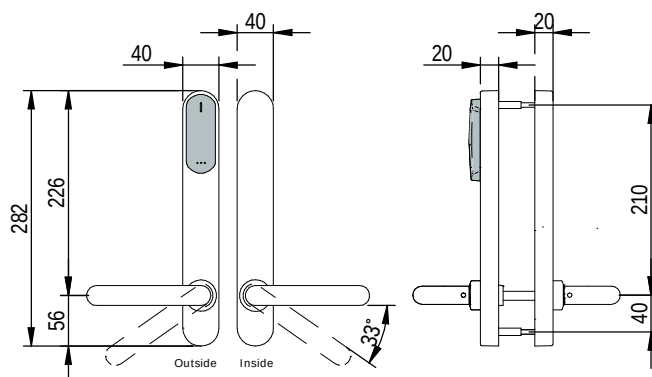

Signalling



TORX 20 (x2)




TORX 20 (x1)




TORX 20 (x6)



ALLEN 3 (x2)



BOLT
(Depending on door thickness)

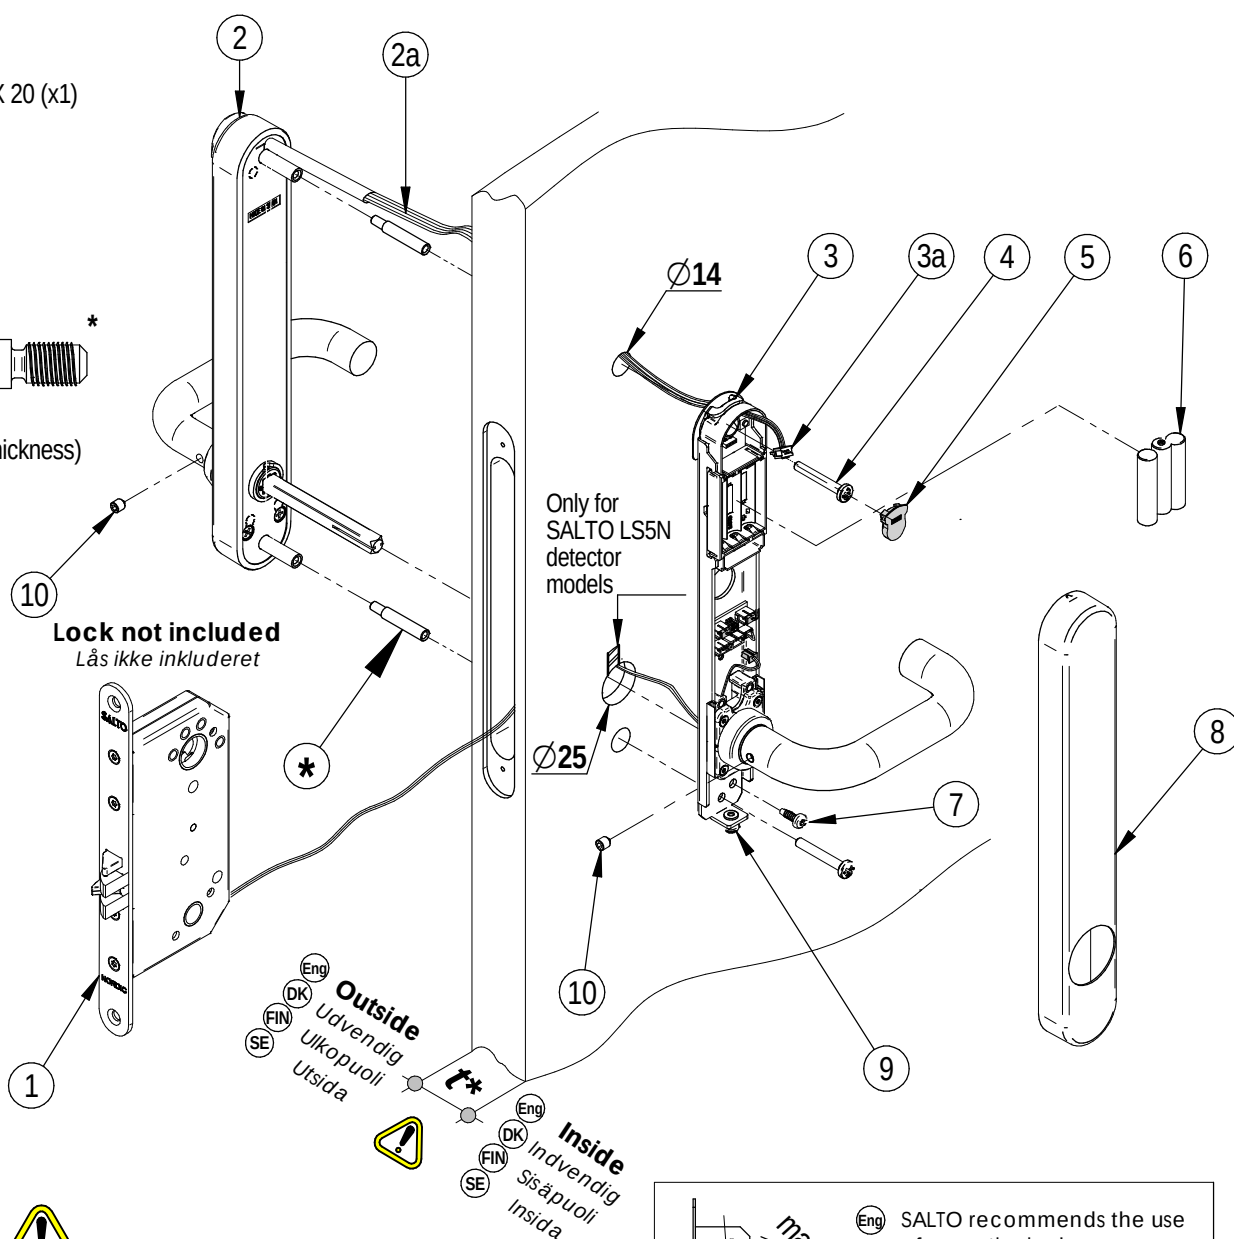

Lock not included
Lås ikke inkluderet

Only for
SALTO LS5N
detector
models


Eng Outside
DK Udvendig
FIN Ulkopuoli
SE Utsida

Eng Inside
DK Indvendig
FIN Sisäpuoli
SE Insida



- Eng * Required only for doors that exceed 60mm thickness.
- DK * Skal kun anvendes på døre hvor tykkelse er mere end 60mm.
- FIN * Oville jotka vahvempia kuin 60 mm
- SE * Behövs endast för dörrar som är tjockare än 60mm

All contents current at time of publication.
SALTO Systems S.L. reserves the right to change availability of any item in this catalog, its design, construction, and/or materials.

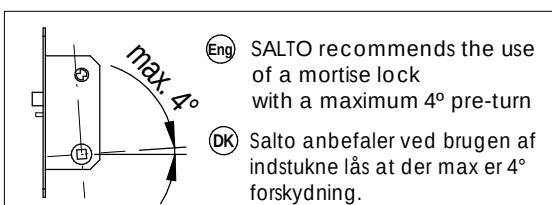






- Eng SALTO recommends the use of a mortise lock with a maximum 4° pre-turn
- DK Salto anbefaler ved brugen af indstukne lås at der max er 4° forskydning.

Installation guide





XS4 Original+ for Scandinavian modular mortise locks

SALTO
inspiredaccess

Eng Select handing DK VÆlg retning for greb FIN Valitse kätsiys SE Välj höger / vänster

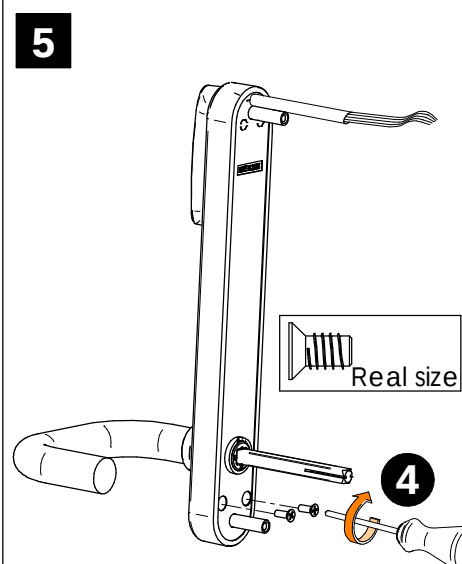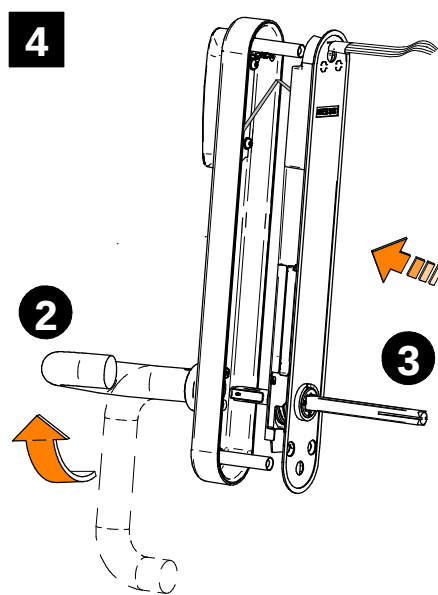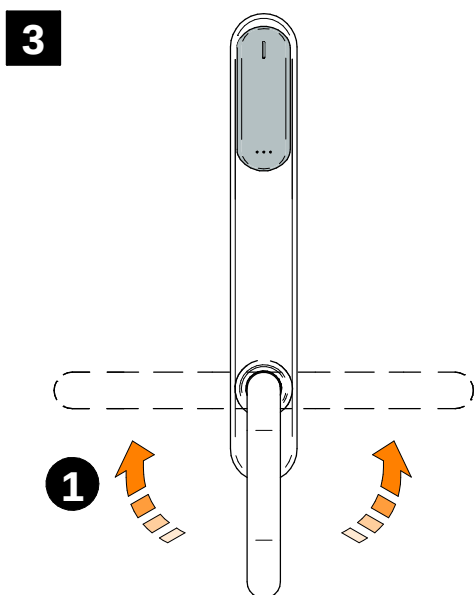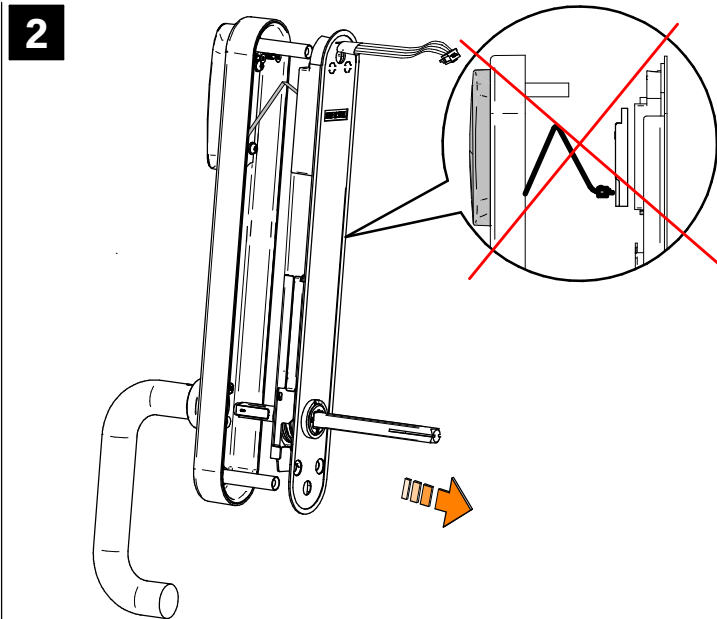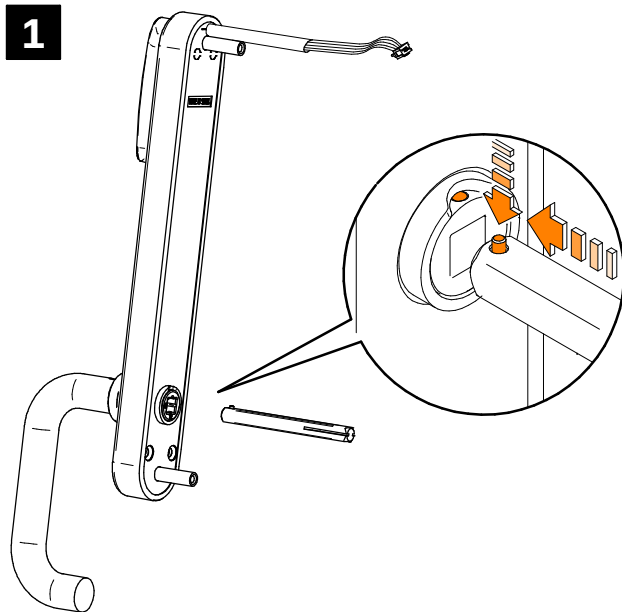


Eng Installation DK Installation FIN Asennus SE Installation

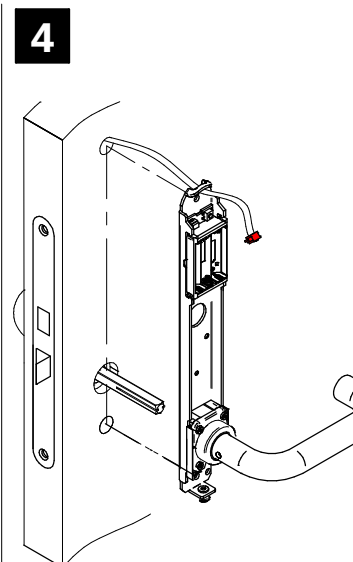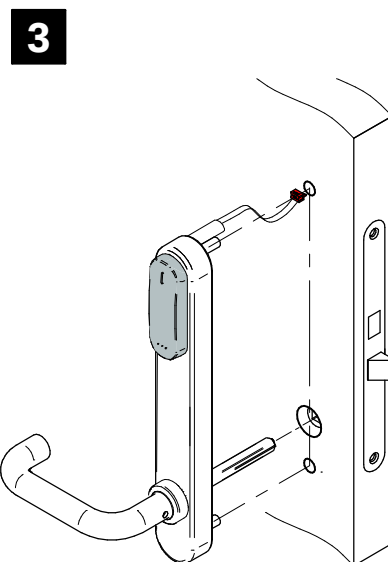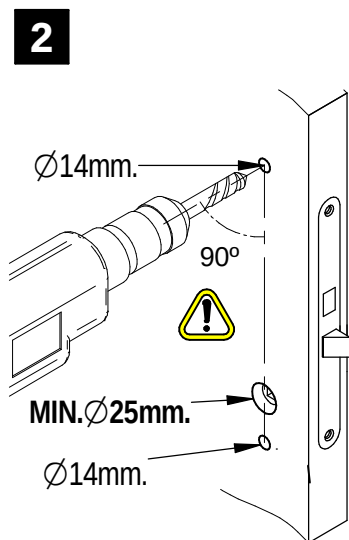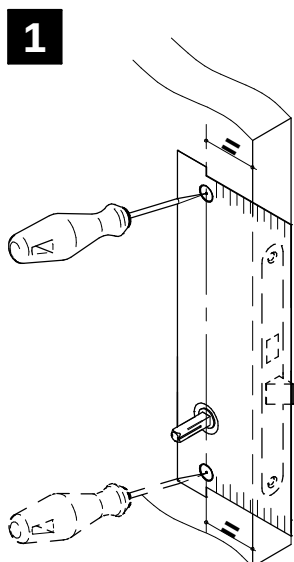

Installation guide

XS4 Original+ for Scandinavian modular mortise locks



SALTO
inspired access

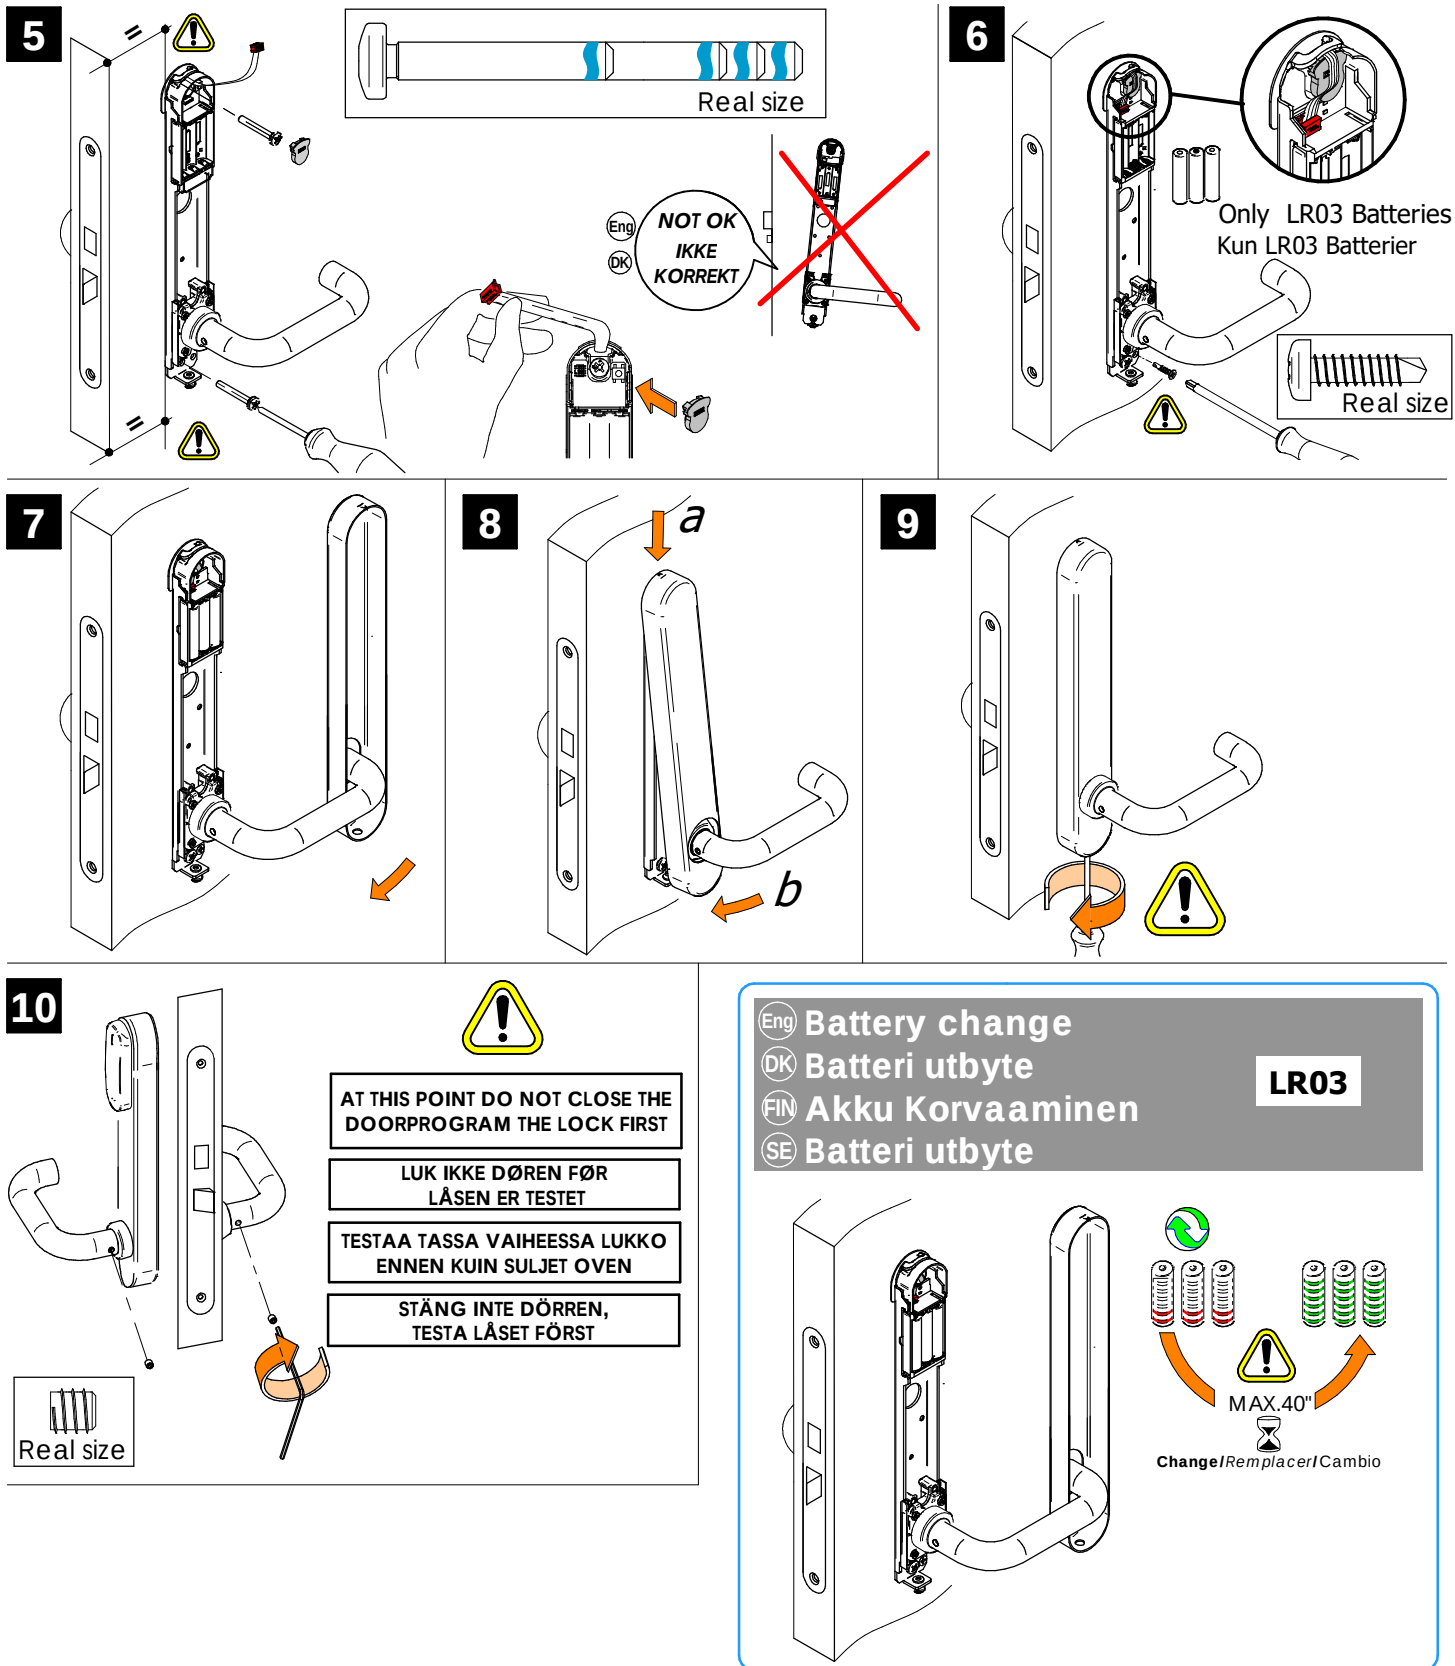

Installation guide


XS4 Original+ for Scandinavian modular mortise locks

SALTO
inspiredaccess

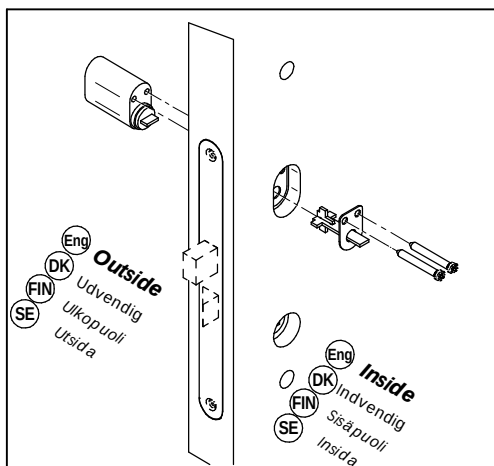

**Turn spline set .
(NOT INCLUDED).**

Medbringer sæt .
(IKKE INKLUDERET).

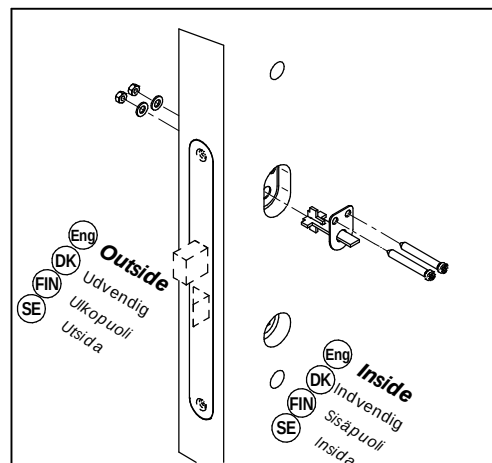


Single cylinder with thumb turn

Enkelt cylinder med vrider

Si451 m 00 ff t x h r

Si455 m dd ff t x h r




Eng HOTEL GUEST ROOM LOCK

DK LÅS FOR HOTEL VÆRELSE


FIN HOTELLIN VIERASHUONE

SE HOTELL ENHET

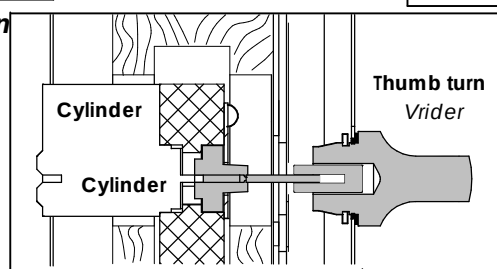

Thumb turn for the inside

Vrider på indvendig side

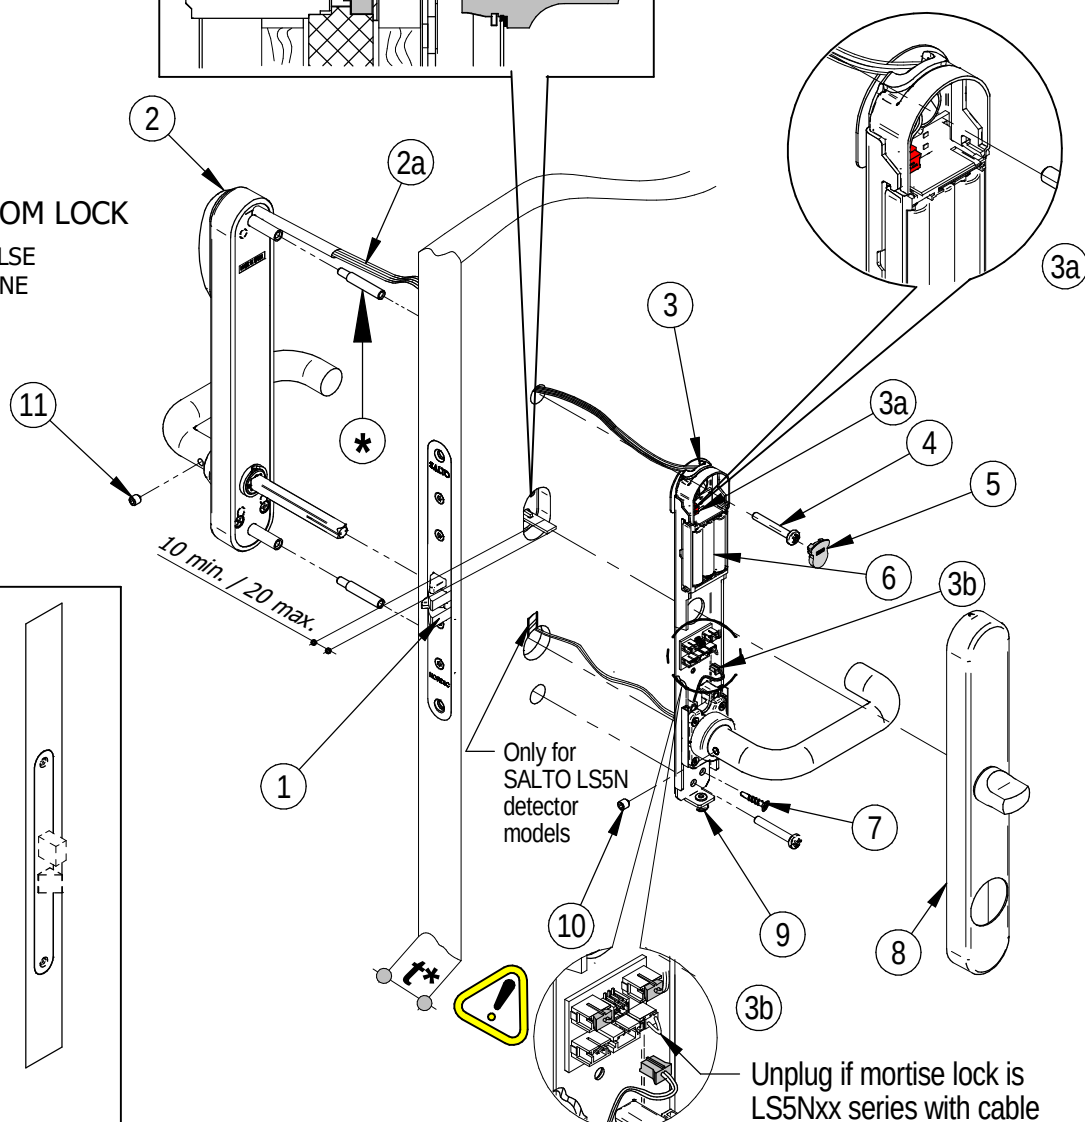

* Required only for doors
that exceed 60mm (2-3/8")
thickness

* Skal kun anvendes på døre hvor
tykkelse er mere end 60mm

