
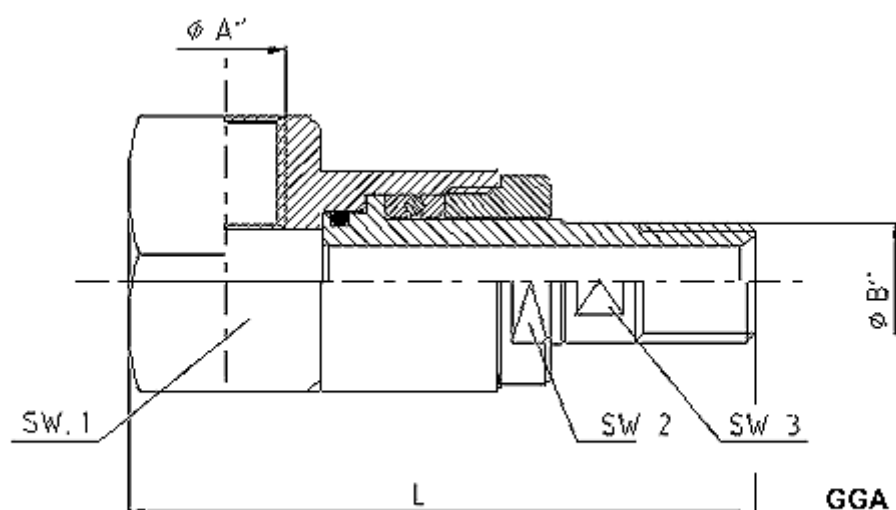


Swivel joints GG

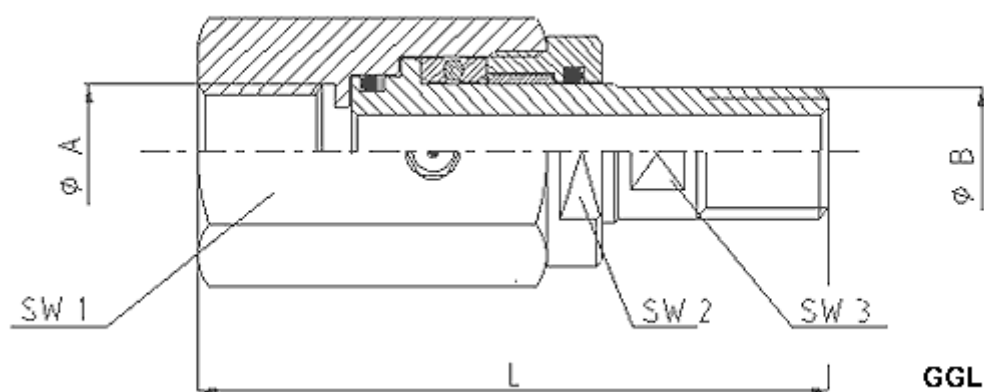

Materials: high grade carbon steel, induction hardened, galvanized and yellow passivated.
Standard seal in nitrile rubber. Max 8-10 upm.

Size	Code	A e B inch	L mm	SW1 mm	SW2 mm	SW3 mm	Code	A e B inch	L mm	SW1 mm	SW2 mm	SW3 mm
------	------	---------------	---------	-----------	-----------	-----------	------	---------------	---------	-----------	-----------	-----------

		BSP										
04	GGL14	1/4"	46	30	21	11	GGA14	1/4"	54	32	21	11
06	GGL38	3/8"	55	30	27	14	GGA38	3/8"	65	38	27	14
08	GGL12	1/2"	70	36	32	18	GGA12	1/2"	75	46	32	18
12	GGL34	3/4"	67	41	37	24	GGA34	3/4"	82	50	37	24
16	GGL10	1"	76	50	46	30	GGA10	1"	76	50	46	30

Darbo Engineering s.r.l. - Via dei Mulini 13/15 - 20080 Albairate (MI) - ITALY
 Tel. +39.02.9492.0510 - Fax +39.02.9406426 - GSM +39.335.467232 - E-mail:mailto:info@darbo.it