



Inlet Air Temperature	[°C]	-20.00	Evaporating temperature [Mid]	[°C]	-28.00
DT [Dew]	[K]	5.77	Refrigerant		R449A
Minimum number of units in room		0	Altitude	[m]	0.0
Heat exchanger	Aluminium fin		Casing	Standard	
Fan motor feed	Standard		Type of fan motor	EC	
Defrost	Electric				
Selected model: 1 x GCE 253E8			EC - ED		
Capacity	[kW]	2.89	Margin	[%]	0.0
DT [Dew]	[K]	5.8	Tot. air flow	[m³/h]	2520.0
Tot. Pres.S.Lev.	[dB(A) @[m]]	41 (5m)			

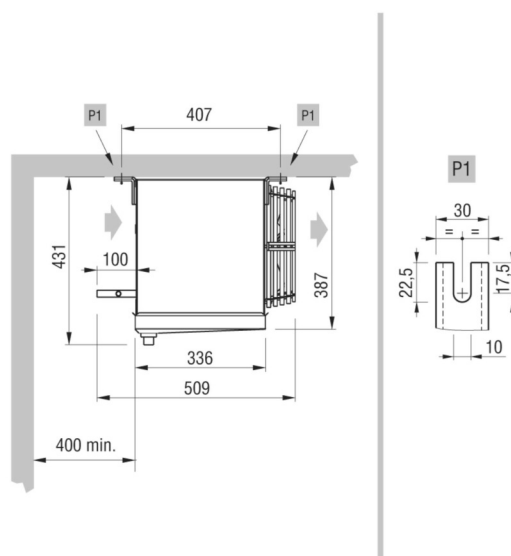

Weight	kg	31.000	PED Category		Cat I
			Design Pressure PS	[bar]	30
Internal surface	m²	2.19	External surface	m²	15.30
Inlet connection		12 mm	Output connection		22 mm
Total circuit capacity	dm³	3.2	Fin spacing	mm	8
Drain connection		1" GAS			
Defrost	ED		Electric	W	3325
Fan Motors	n.	3	Diameter	mm	250
Air flow	m³/h	2520	Air throw	m	10.0
Feed	V	230/1/50	Rotation speed	rpm	1300
Fan Motor	A	0.66	Absorbed power	W	78.0
Pres.S.Lev. 5 m.	dB(A)	41			

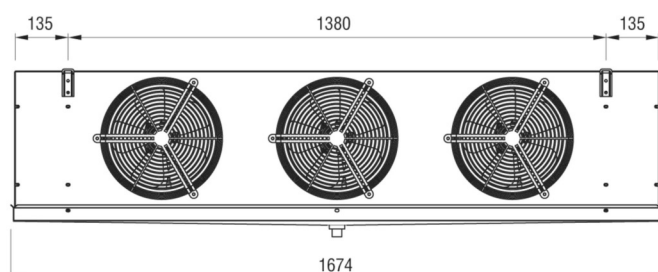

* The safety requirements for the use of refrigerants must comply with the provisions of the EN378 standards and the safety data sheets of each fluid used. The risk assessment for the use of A2L mid-flammable refrigerants shall be conducted by the user based on site requirements

EC fans: It is necessary to set these fans in order to get the required speed

EC - ED

Heat exchanger

Aluminium fin

Casing

Standard

Fan motor feed

Standard

Type of fan motor

EC - Electronically Commutated Motor

Defrost

ED - Electric



* The safety requirements for the use of refrigerants must comply with the provisions of the EN378 standards and the safety data sheets of each fluid used. The risk assessment for the use of A2L mid-flammable refrigerants shall be conducted by the user based on site requirements

EC fans: It is necessary to set these fans in order to get the required speed