
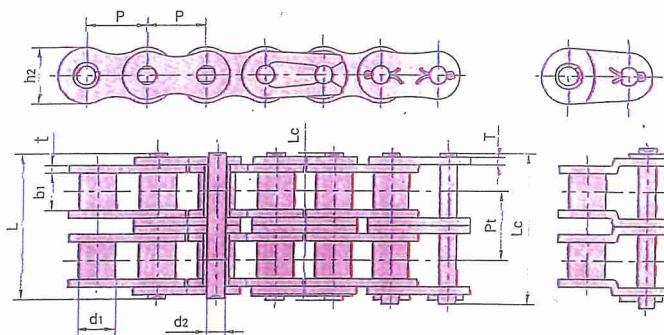


Stainless Steel Chain • Stainless Steel Chain

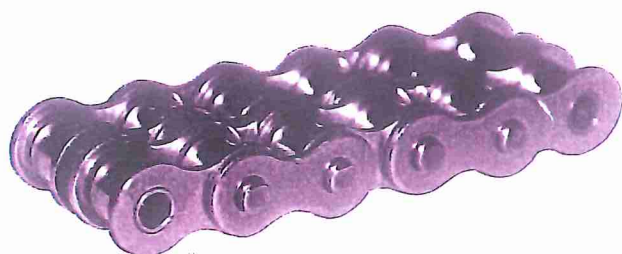

DIN/ISO	Pitch	Roller diameter	Width between inner plates	Pin diameter	Pin length		Inner plate depth	Plate thickness	Transverse pitch	Ultimate tensile strength	Average tensile strength	Weight per meter
DIN/ISO Chain No.	P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	t/T max	Pt	Q min	Qo	q.
	mm	mm	mm	mm	mm	mm	mm	mm	mm	KN/LB	KN	Kg/m
SS05B-2	8.000	5.00	3.00	2.31	13.90	14.50	7.10	0.80	5.64	5.46/1241.1	7.14	0.33
SS06B-2*	9.525	6.35	5.72	3.28	23.40	24.40	8.20	1.30	10.24	11.83/2688.7	13.09	0.77
SS08B-2	12.700	8.51	7.75	4.45	31.00	32.20	11.80	1.60	13.92	22.40/5091.1	27.09	1.34
SS10B-2	15.875	10.16	9.65	5.08	36.10	37.50	14.70	1.70	16.59	31.15/7079.8	39.34	1.84
SS12B-2	19.050	12.07	11.68	5.72	42.00	43.60	16.00	1.85	19.46	40.46/9195.2	46.27	2.31
SS16B-2	25.400	15.88	17.02	8.28	68.00	69.30	21.00	4.15/3.1	31.88	74.20/16863.7	93.10	5.42
SS20B-2	31.750	19.05	19.56	10.19	77.80	81.50	26.40	4.5/3.5	36.45	119.00/27045.2	147.84	7.20
SS24B-2	38.100	25.40	25.40	14.63	101.70	106.20	33.20	6.0/4.8	48.36	196.00/44545.2	223.44	13.40
SS28B-2	44.450	27.94	30.99	15.90	124.60	129.10	36.70	7.5/6.0	59.56	252.56/57272.6	284.26	16.60
SS32B-2	50.800	29.21	30.99	17.81	124.60	129.60	42.00	7.0/6.0	58.55	315.00/71591.1	355.95	21.00
SS40B-2	63.500	39.37	38.10	22.89	154.50	161.50	52.96	8.5/8.0	72.29	441.00/100227.4	498.33	32.00
SS48B-2	76.200	48.26	45.72	29.24	190.40	198.20	63.80	12.0/10.0	91.21	700.00/159090.4	791.00	50.00
SS56B-2	88.900	53.98	53.34	34.32	221.20	229.60	77.80	13.5/12.0	106.60	1120.00/254544.5	1232.00	71.48
SS64B-2	101.600	63.50	60.96	39.40	249.90	258.40	90.17	15.0/13.0	119.89	1400.00/318180.80	1540.00	91.00
SS72B-2	114.300	72.39	68.58	44.48	283.70	292.70	103.60	17.0/15.0	136.27	1750.00/397726.00	1925.00	120.40

*Straight plate chain

Material: 300, 400, 600 series stainless steel