


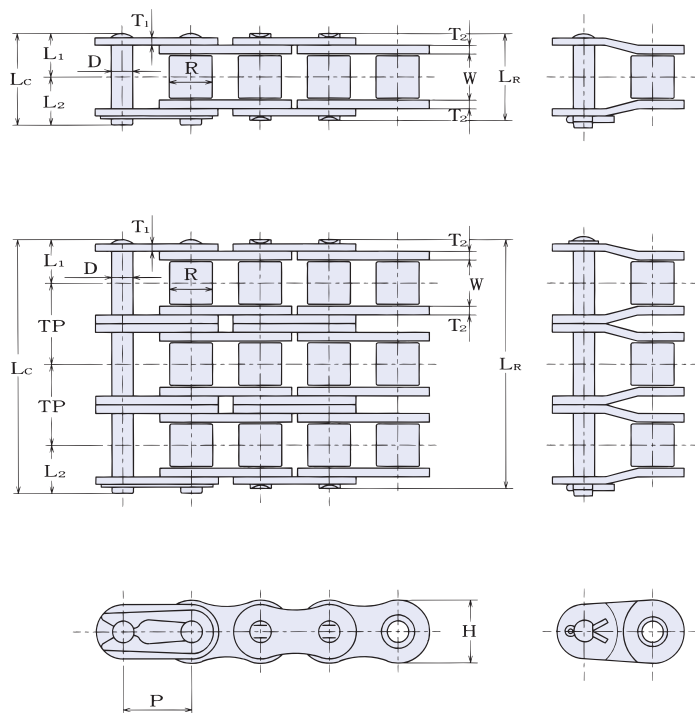

Item	See Page	
Attachment Chain	64	65
Rustless	36	40 42
SLR Self-Lube Chain	51	
Drive Chain Selection	76	77

Standard Packing	08B	10B
1 Unit (10')	240P	192P
1 Unit (5m)	394P	316P

08B

SY Chain No. (B S)	Pitch	Dimensions - mm											Minimum Ultimate Strength	Maximum Allowable Load	Average Chain Weight
		Roller		Pin				Plate			Trans. Pitch				
		Width	Dia.	Dia.	Length			Height	Thickness						
	P	W	R	D	L _R	L _C	L ₁	L ₂	H	T ₁	T ₂	TP	kN	kN	kg/m
08B	12.70	7.75	8.51	4.45	16.7	18.2	8.4	9.8	11.8	1.5		13.92	17.8	3.14	0.61
-2					30.6	31.9							31.1	5.35	1.26
-3					44.5	45.8							44.5	7.85	1.88

10B

SY Chain No. (B S)	Pitch	Dimensions - mm										Minimum Ultimate Strength	Maximum Allowable Load	Average Chain Weight	
		Roller		Pin				Plate			Trans. Pitch				
		Width	Dia.	Dia.	Length			Height	Thickness						
	P	W	R	D	L _R	L _C	L ₁	L ₂	H	T ₁	T ₂	TP	kN	kN	kg/m
10B	15.875	9.65	10.16	5.08	19.0	20.7	9.5	11.2	14.7	1.65		16.59	22.2	4.90	0.89
-2					35.6	37.3							44.5	8.33	1.79
-3					52.4	54.4							66.7	12.2	2.66

※Refer to page 80. "Selection of offset link"