
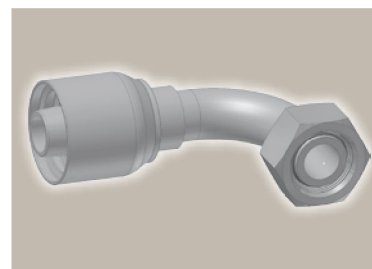


## CF Female Metric 24° Light Series with O-Ring Swivel – 90° Elbow

ISO 12151-2-SWE-L – DKOL 90°





| Part Number | Hose I.D. |      |      |      | Thread<br>metric | Tube<br>O.D.<br>mm | A<br>mm | B<br>mm | E<br>mm | W<br>mm |
|-------------|-----------|------|------|------|------------------|--------------------|---------|---------|---------|---------|
|             | DN        | Inch | Size | mm   |                  |                    |         |         |         |         |
| 1CF70-10-6  | 10        | 3/8  | -6   | 9.5  | M16x1.5          | 10                 | 67      | 38      | 38      | 19      |
| 1CF70-12-6  | 10        | 3/8  | -6   | 9.5  | M18x1.5          | 12                 | 67      | 38      | 37      | 22      |
| 1CF70-15-8  | 12        | 1/2  | -8   | 12.7 | M22x1.5          | 15                 | 74      | 39      | 45      | 27      |
| 1CF70-18-8  | 12        | 1/2  | -8   | 12.7 | M26x1.5          | 18                 | 71      | 36      | 40      | 32      |
| 1CF70-15-10 | 16        | 5/8  | -10  | 15.9 | M22x1.5          | 15                 | 79      | 42      | 50      | 27      |
| 1CF70-18-10 | 16        | 5/8  | -10  | 15.9 | M26x1.5          | 18                 | 79      | 42      | 49      | 32      |
| 1CF70-18-12 | 19        | 3/4  | -12  | 19.1 | M26x1.5          | 18                 | 89      | 49      | 56      | 32      |
| 1CF70-22-12 | 19        | 3/4  | -12  | 19.1 | M30x2            | 22                 | 89      | 49      | 55      | 36      |
| 1CF70-28-16 | 25        | 1    | -16  | 25.4 | M36x2            | 28                 | 114     | 68      | 73      | 41      |
| 1CF70-35-16 | 25        | 1    | -16  | 25.4 | M45x2            | 35                 | 115     | 68      | 69      | 50      |

Fittings with standard O-ring seals can be used for temperatures from -40 °C up to +105 °C.  
O-rings see section Eb. Special O-rings are available on request.

## D0 Male Metric 24° Light Series – Rigid Straight

ISO 12151-2-S-L – CEL

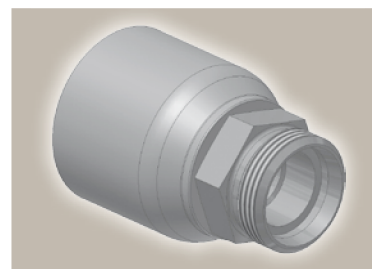

| Part Number | Hose I.D. |      |      |      | Thread<br>metric | Tube<br>O.D.<br>mm | A<br>mm | B<br>mm | H<br>mm |
|-------------|-----------|------|------|------|------------------|--------------------|---------|---------|---------|
|             | DN        | Inch | Size | mm   |                  |                    |         |         |         |
| 1D070-15-8  | 12        | 1/2  | -8   | 12.7 | M22x1.5          | 15                 | 60      | 26      | 22      |
| 1D070-18-10 | 16        | 5/8  | -10  | 15.9 | M26x1.5          | 18                 | 65      | 28      | 27      |
| 1D070-22-12 | 19        | 3/4  | -12  | 19.1 | M30x2            | 22                 | 69      | 30      | 30      |
| 1D070-28-16 | 25        | 1    | -16  | 25.4 | M36x2            | 28                 | 79      | 32      | 36      |

Attention: Hose assembly pressure is reduced; see page Ab-8

Approved **fitting series** for hose types:

**70** 371LT 372 372RH 372TC 701 F42-8