
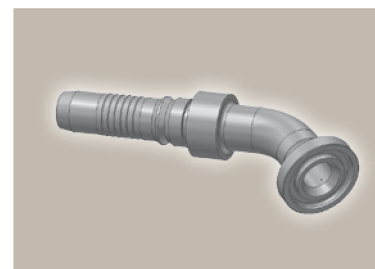


17/4F ISO 6162-1 Flange 45° Elbow

ISO 12151-3 – E45S – L – SFL 45°
(35.0 MPa/ 5000 psi)



Part Number	Hose I.D.				Flange Inch	A mm	B mm	E mm	F mm
	DN	Inch	Size	mm					
K17V4-12-12	19	3/4	-12	19.1	3/4	133	72	26	38
K17V4-16-12	19	3/4	-12	19.1	1	133	72	26	45
K4FV4-20-12	19	3/4	-12	19.1	1 1/4	133	71	25	51
K17V4-16-16	25	1	-16	25.4	1	160	87	32	45
K4FV4-20-16	25	1	-16	25.4	1 1/4	160	87	32	51
K17V6-16-20	31	1 1/4	-20	31.8	1	188	97	38	44
K17V4-16-20	31	1 1/4	-20	31.8	1	198	109.7	38	45
K4FV6-20-20	31	1 1/4	-20	31.8	1 1/4	188	97	38	51
K4FV4-20-20	31	1 1/4	-20	31.8	1 1/4	198	109.7	38	51
K4FV6-24-20	31	1 1/4	-20	31.8	1 1/2	188	97	38	60
K4FV4-24-20	31	1 1/4	-20	31.8	1 1/2	198	109.7	38	60
K4FV6-20-24	38	1 1/2	-24	38.1	1 1/4	201	105	44	51
K4FV6-24-24	38	1 1/2	-24	38.1	1 1/2	221	125	44	60
K4FV4-24-24	38	1 1/2	-24	38.1	1 1/2	222	128.9	44	60
K4FV6-32-24	38	1 1/2	-24	38.1	2	221	125	44	71
K4FV4-32-24	38	1 1/2	-24	38.1	2	222	128.9	44	71
K4FV4-32-32	51	2	-32	50.8	2	269	171	62	71
K4FV6-32-32	51	2	-32	50.8	2	280	169	62	71

Approved **fitting series** for hose types:

Also available in stainless steel. Details can be found in CAT 4400.1/UK

V4	-10 up to -16	H31	H31TC	H31ST	R42	R42TC	R42ST	-12 up to -20	R35	R35TC	H29	all sizes	H29TC	H29ST	H29RH
V6	-24 up to -48	R35	R35TC	RS35TC-48	-20 up to -32	R42	R42ST	R42TC							