


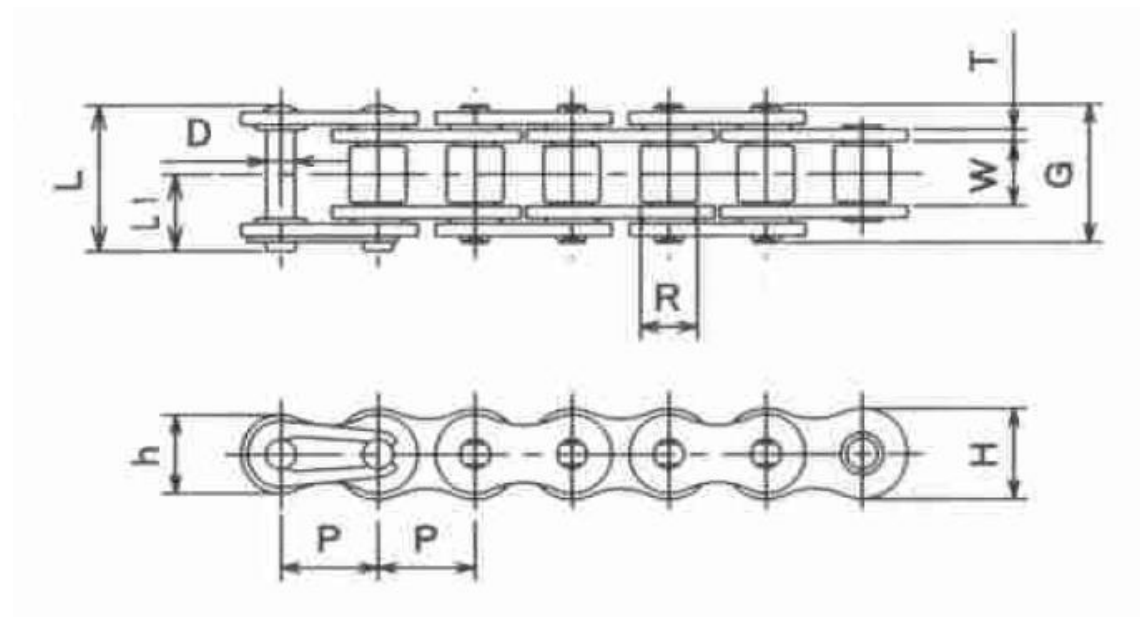

EK CHAIN No.	PITCH P	ROLLER LINK WIDTH W_{min}	ROLLER DIA. R	PIN				PLATE			AVE. TENSILE STRENGTH		MAX. ALLOWABLE LOAD		APPROX. WEIGHT (kg/m)
				D	G	L	L1	$T_{INNER/OUTER}$	Hmax	hmax	kN	kgf	kN	kgf	
EK08B-X	12.700	7.75	8.51	4.44	19.30	20.20	10.50	1.5/1.5	11.8	10.9	18.1	1,850	3.53	360	0.71
EK10B-X	15.875	9.65	10.16	5.07	22.10	22.80	11.75	1.5/1.5	14.7	13.7	23.5	2,400	4.51	460	0.93
EK12B-X	19.050	11.68	12.07	5.70	25.20	26.30	13.70	1.8/1.8	16.1	16.1	31.4	3,200	5.39	550	1.26
EK16B-X	25.400	17.02	15.88	8.27	39.40	40.15	20.45	4.0/3.2	21.0	21.0	76.5	7,800	15.20	1,550	2.75