


### ISO G - Regulating out banjo elbow assembly 16K51

Regulating out, with seals

Body and regulating bolt: Nickel plated brass

Regulating screw: brass

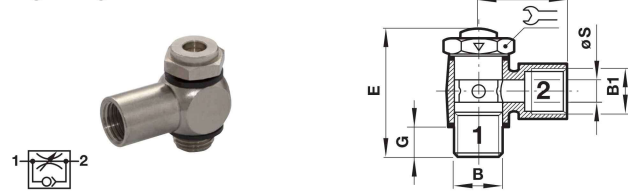

| B/B1 | C  | E  | G    | Ø S | Operating pressure | Symbol | Model     |
|------|----|----|------|-----|--------------------|--------|-----------|
| G1/8 | 21 | 34 | 7,5  | 6   | 10 bar max         | 14     | 16K511818 |
| G1/4 | 28 | 37 | 8    | 7,6 | 10 bar max         | 17     | 16K512828 |
| G3/8 | 31 | 52 | 12   | 9,6 | 10 bar max         | 22     | 16K513838 |
| G1/2 | 47 | 58 | 14,5 | 9,6 | 10 bar max         | 27     | 16K514848 |

### ISO G - Banjo elbow body 16051

Nickel plated brass



| B/B1 | C  | E    | F  | Ø K  | Ø S | Model     |
|------|----|------|----|------|-----|-----------|
| G1/8 | 28 | 14   | 21 | 13   | 6   | 160511818 |
| G1/4 | 37 | 16   | 28 | 16   | 7,6 | 160512828 |
| G3/8 | 42 | 20,5 | 31 | 20,5 | 9,6 | 160513838 |
| G1/2 | 61 | 22   | 47 | 24,5 | 9,6 | 160514848 |

### ISO G - Regulating out banjo bolts 20K00

With seals (screwdriver adjustable), Regulating bolt: Nickel plated brass

Regulating screw: brass




| B    | C    | Operating pressure | Symbol | Model     |
|------|------|--------------------|--------|-----------|
| G1/8 | 35   | 10 bar max         | 14     | 20K000018 |
| G1/4 | 37,5 | 10 bar max         | 17     | 20K000028 |
| G3/8 | 51,5 | 10 bar max         | 22     | 20K000038 |
| G1/2 | 57   | 10 bar max         | 27     | 20K000048 |

### ISO G - Regulating in banjo bolts 20L00

With seals (screwdriver adjustable), Regulating bolt: Nickel plated brass

Regulating screw: brass

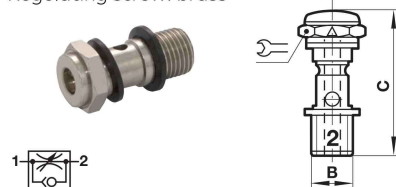


| B    | C    | Operating pressure | Symbol | Model     |
|------|------|--------------------|--------|-----------|
| G1/8 | 34   | 10 bar max         | 14     | 20L000018 |
| G1/4 | 36,5 | 10 bar max         | 17     | 20L000028 |
| G3/8 | 51,5 | 10 bar max         | 22     | 20L000038 |
| G1/2 | 57   | 10 bar max         | 27     | 20L000048 |

### ISO G - Banjo elbow assembly 16A51

Non-regulating, with seals

Body and regulating bolt: Nickel plated brass

Dimensions in mm  
Projection/First angle

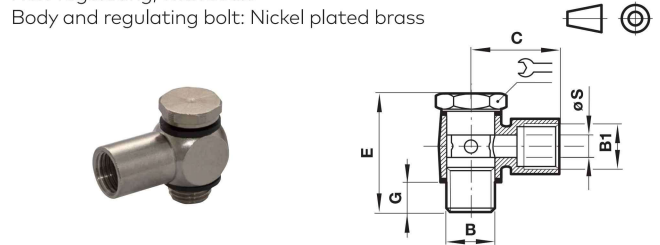


| B/B1 | C  | E  | G   | Ø S | Symbol | Model     |
|------|----|----|-----|-----|--------|-----------|
| G1/8 | 21 | 29 | 5   | 6   | 14     | 16A511818 |
| G1/4 | 28 | 32 | 6   | 7,6 | 17     | 16A512828 |
| G3/8 | 31 | 45 | 9,5 | 9,6 | 22     | 16A513838 |
| G1/2 | 47 | 47 | 12  | 9,6 | 27     | 16A514848 |

### ISO G - Banjo bolt 20A00 and 20B00

Non-regulating, with seals

Nickel plated brass

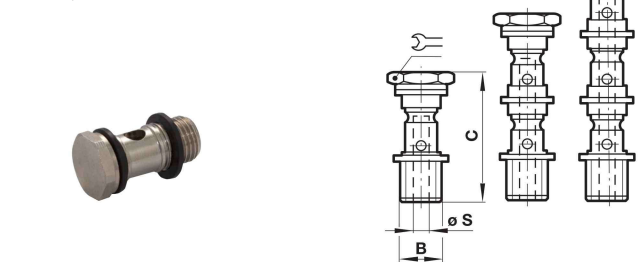


| B    | C    | Ø S  | Number banjo bodies | Symbol | Model     |
|------|------|------|---------------------|--------|-----------|
| G1/8 | 29   | 4,5  | single              | 14     | 20A000018 |
| G1/4 | 31,5 | 8    | single              | 17     | 20A000028 |
| G3/8 | 42,5 | 9,5  | single              | 22     | 20A000038 |
| G1/2 | 47,5 | 11,5 | single              | 27     | 20A000048 |
| G1/8 | 46,5 | 4,5  | double              | 14     | 20B000018 |
| G1/4 | 52,5 | 8    | double              | 17     | 20B000028 |
| G3/8 | 64   | 9,5  | double              | 22     | 20B000038 |
| G1/2 | 72,5 | 11,5 | double              | 27     | 20B000048 |

### ISO G - Bi-directional banjo bolts 20M00

With seals (screwdriver adjustable), Regulating bolt: Nickel plated brass

Regulating screw: brass

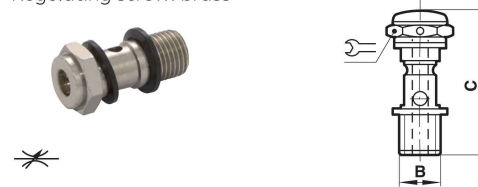

| B    | C    | Operating pressure | Symbol | Model     |
|------|------|--------------------|--------|-----------|
| G1/8 | 35   | 10 bar max         | 14     | 20M000018 |
| G1/4 | 37,5 | 10 bar max         | 17     | 20M000028 |
| G3/8 | 51,5 | 10 bar max         | 22     | 20M000038 |
| G1/2 | 57   | 10 bar max         | 27     | 20M000048 |