


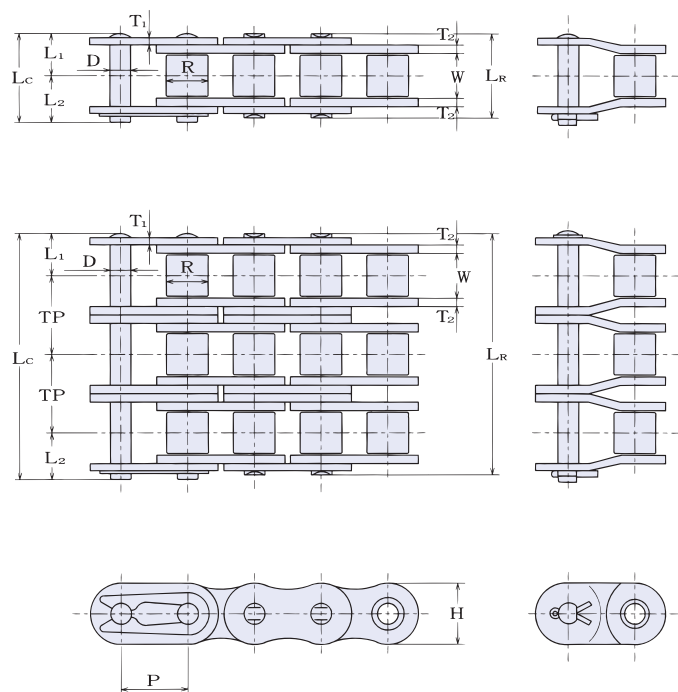

Item	See Page	
Attachment Chain	64	65
Rustless	36	40 42
SLR Self-Lube Chain	51	
MF Maintenance Free	56	76
Drive Chain Selection	76	77

Standard Packing	12B	16B
1 Unit (10')	160P	120P
1 Unit (5m)	262P	198P

12B

SY Chain No. (B S)	Pitch	Dimensions - mm											Minimum Ultimate Strength	Maximum Allowable Load	Average Chain Weight
		Roller		Pin				Plate			Trans. Pitch				
		Width	Dia.	Dia.	Length			Height	Thickness						
	P	W	R	D	LR	LC	L1	L2	H	T1	T2	TP	kN	kN	kg/m
12B	19.05	11.68	12.07	5.72	22.0	23.6	11.0	12.6	16.1	1.8		19.46	28.9	7.06	1.14
-2					41.6	43.1							57.8	12.0	2.28
-3					61.1	62.7							86.7	17.6	3.36

16B

SY Chain No. (B S)	Pitch	Dimensions - mm											Minimum Ultimate Strength	Maximum Allowable Load	Average Chain Weight
		Roller		Pin				Plate			Trans. Pitch				
		Width	Dia.	Dia.	Length			Height	Thickness						
	P	W	R	D	L _R	L _C	L ₁	L ₂	H	T ₁	T ₂	TP	kN	kN	kg/m
16B	25.40	17.02	15.88	8.26	35.1	38.2	17.6	20.6	21.0	3.2	4.0	31.88	60	16.4	2.59
-2					67.2	70.1							106	21.4	5.13
-3					99.2	102.5							160	31.5	7.68

※Refer to page 80. "Selection of offset link"