




code	inside diameter		weight nominal		bending radius		vacuum	length max	
									
	mm	inch	kg/m	lbs/ft	mm	inch	bar	m	ft
1224603	76	3	2,00	1,34	350	13,8	0,7	60	200
1224751	102	4	2,85	1,92	400	15,8	0,7	60	200
1224760	127	5	3,50	2,35	500	19,7	0,7	60	200
1224778	152	6	4,14	2,78	600	23,6	0,7	60	200
1273167	203	8	6,41	4,31	800	31,5	0,7	60	200

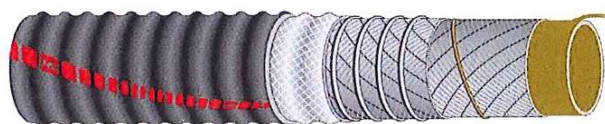

IT

Tubo leggero per aspirazione di materiali abrasivi

Applicazione: tubo spiralato ondulado, flessibile e leggero, utilizzato nei camion cisterna. Idoneo per sola aspirazione di prodotti abrasivi.

Temperatura: da -30°C a +70°C.

Costruzione

Sottostrato: NR, marrone, liscio.

Rinforzo: tessuti sintetici ad alta resistenza, spirale d'acciaio e trecce rame antistatiche incorporate.

Copertura: in gomma EPDM, nera, ondulata (ad impression tela), resistente agli agenti atmosferici e all'ozono.

Marcatura: transfer IVG di colore rosso.

Disponibili a richiesta: 1. Fornito con manicotti lunghi 50 mm.

EN

Lightweight suction material handling hose

Application: hardwall corrugated hose which is flexible and lightweight to be used on tank truck only for suction of abrasive products.

Temperature: from -30°C (-22°F) to +70°C (+158°F).

Construction

Tube: NR, brown, smooth.

Reinforcement: high strength synthetic cord, steel helix wire and anti-static copper wires protruding.

Cover: EPDM rubber, black, corrugated (wrapped finish), weathering and ozone resistant.

Branding: red IVG transfer tape.

Also available upon request: 1. Supplied with soft ends 50 mm long.