

Data sheet

3-way valve (PN 10)

KOVM - internal thread

Description



KOVM is 3-way mixing valve which can, among others, be used for the water-side regulation of terminals in the form of "fan-coils" or as induction units.

It can be combined with:

- RAVK self-acting thermostatic actuators

Main data:

- DN 15
- k_{vs} 0.63 - 2.0 m³/h
- PN 10
- Temperature:
 - Circulation water / glycolic water up to 30 %: 2 ... 90 °C
- Connections:
 - Int. thread

Ordering


Example:
3-way valve; DN 15; k_{vs} 1.5; PN 10;
 t_{max} 90 °C; int. thread.

- 1x KOVM DN 15 valve
Code No: **013U3015**

Option:

- 1x Comp. fittings
Code No: **013G4112**

KOVM valve

Picture	DN	k_{vs} ¹⁾ (m ³ /h)	Connection ISO 7/1	Differential pressure max. (bar)			Code No.
				with bypass	without bypass	Δp_c ²⁾	
	15	0.63	R _p 1/2	1.6	0.8	0.8	013U3014
		1.5			0.8	0.8	013U3015
		2.0			0.5	0.5	013U3020

¹⁾ k_{vs} gives the water flow with fully open valve and differential pressure across the valve $\Delta p_v = 1$ bar

²⁾ Δp_c gives the max. differential pressure across the heat exchanger controlled by the valve

Accessories


Picture	Type designations	Connection	Dimensions	Code No. ³⁾
	Compression fittings ^{1), 2)}	G 1/2 A	Ø 12 × 1	013G4112
			Ø 14 × 1	013G4114
			Ø 15 × 1	013G4115
			Ø 16 × 1	013G4116

¹⁾ Compression fitting consist of compression ring and nut

²⁾ For steel and copper pipe

³⁾ The products can only be ordered in multiple packing containing 10 pieces each

Service kits

Picture	Type designations	Code No.
	Valve stuffing box	065F0006 ¹⁾

¹⁾ The products can only be ordered in multiple packing containing 10 pieces each


Technical data

Valve


Nominal diameter		DN	15		
k _{vs} value		m ³ /h	0.63	1.5	2.0
Stroke		mm	1.5		
Cavitation factor z			≥ 0.5		
Nominal pressure		PN	10		
Medium			Circulation water / glycolic water up to 30 %		
Medium pH			Min. 7, max. 10		
Medium temperature		°C	2 ... 90		
Connections			Int. thread		
Materials					
Valve body ¹⁾			Brass		
Pressure pin and spindle			Stainless steel 18/8		
Valve cone			EPDM		
O-rings			EPDM		

¹⁾ The valve body material does not permit the valve being used for service hot water.

Application principles

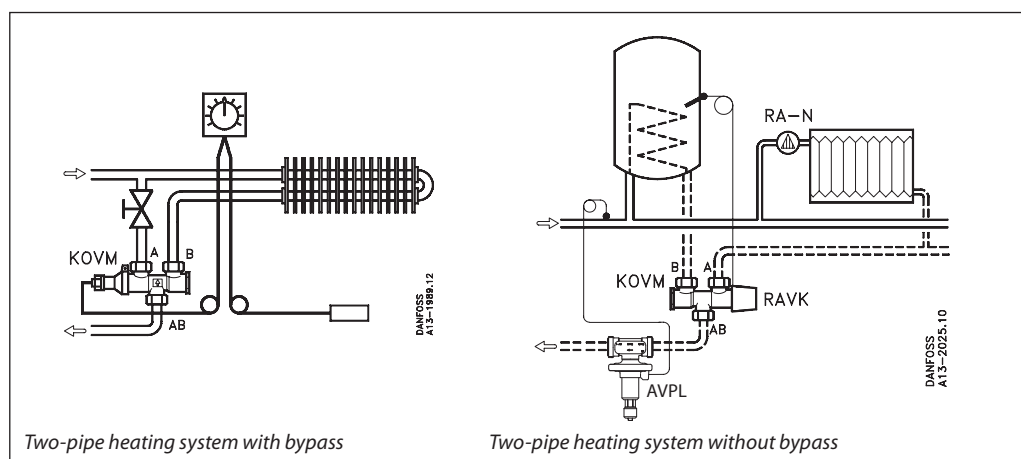

Sizing

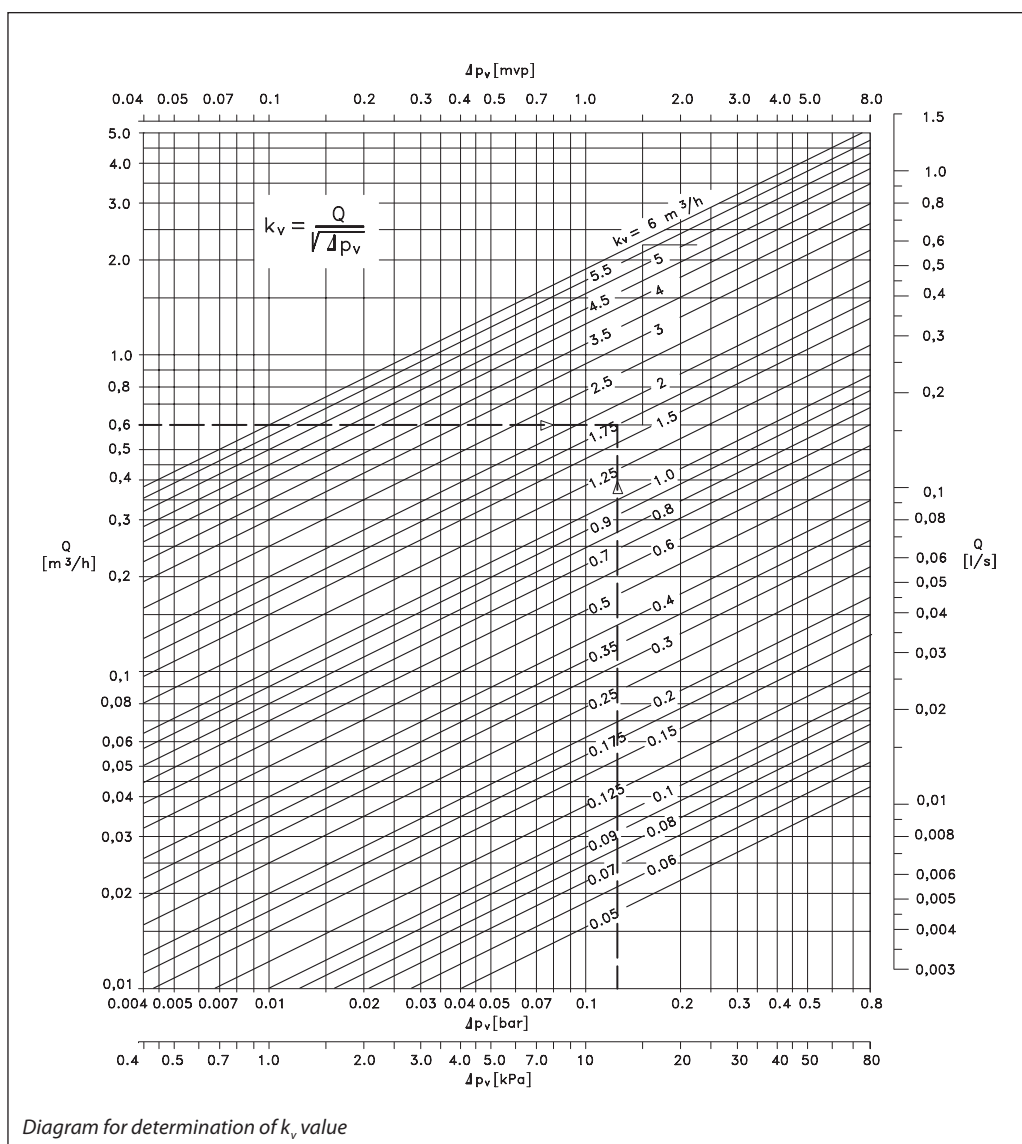

Given data:

Water flow $Q = 0.6 \text{ m}^3/\text{h}$
 Pressure drop across valve $\Delta p = 12 \text{ kPa (0.12 bar)}$

The k_v value can be calculated from the formula:

$$k_v = \frac{Q}{\sqrt{\Delta p}} = \frac{0.6}{\sqrt{0.12}} = 1.73 \text{ m}^3/\text{h}$$

or be read from the diagram on the sloping lines for $1.75 \text{ m}^3/\text{h}$, where the horizontal dotted line for $Q = 0.6 \text{ m}^3/\text{h}$ intersects the vertical dotted line for $\Delta p = 0.12 \text{ bar}$.


The selection is thus a valve with a k_{vs} value of $2.0 \text{ m}^3/\text{h}$.

Data sheet


KOVM (PN 10)

Design

1. Valve stuffing box
2. Bottom screw
3. Valve body
4. Valve cone

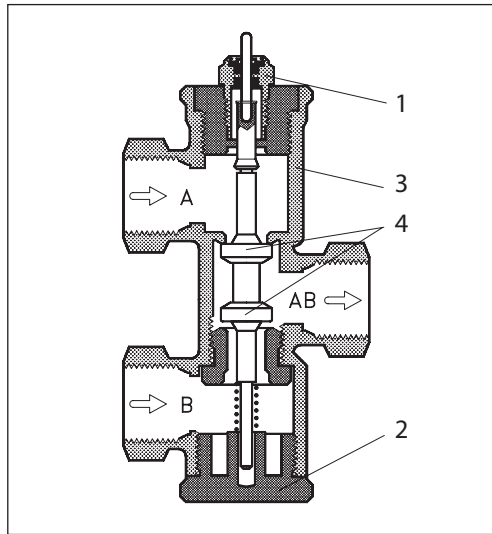

Dimensions

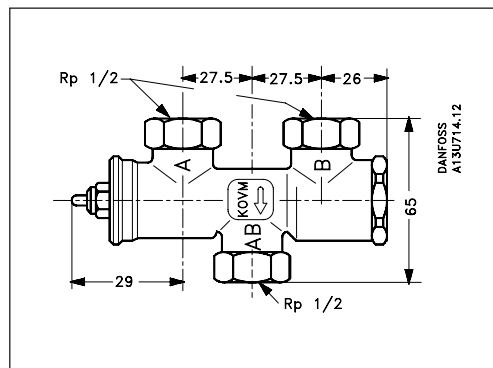

Danfoss A/S

Heating Segment • heating.danfoss.com • +45 7488 2222 • E-Mail: heating@danfoss.com

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequent changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss and all Danfoss logotypes are trademarks of Danfoss A/S. All rights reserved.