



Art. 518 & 519

Support U & L Channel, Pre-galvanised

- Advantages/Benefits
- Element for easily and efficiently pre-assembling crossbars, wall brackets and support structures on site or in workshops.
 - Channel as U & L profile for the save installation of fastenings can be horizontally and vertically adjusted.
 - Quick and efficient fixing element of multiple and single pipes.
 - Ideal for space-saving support structure for multiple pipes between ceiling joists.
 - Also ideal as support structure for air ducts.

- Technical Data
- **Material:**
Steel 1.0332 acc. to DIN EN 10111
 - **Zinc plating:**
Pre-galvanised acc. to DIN EN 10327
Hot-dipped galv. acc. to DIN EN ISO 1461

- Note
- * Available at other U & L channel lengths subject to the special request.

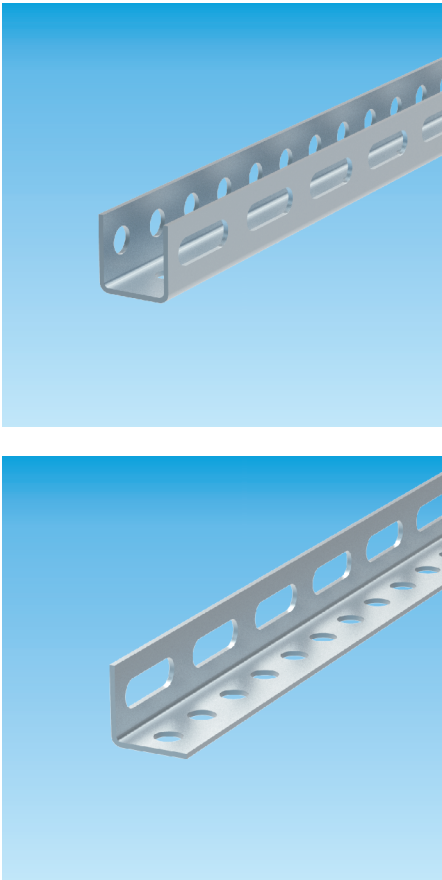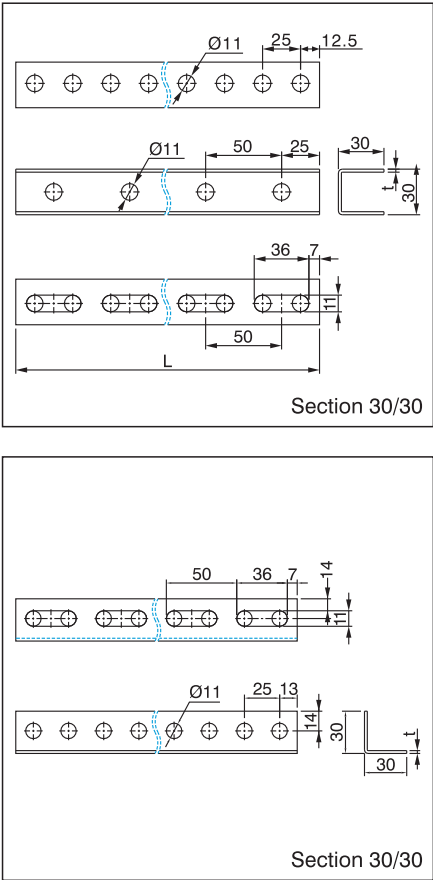

Support U Channel						
Article Number		Section [mm]	Thickness t [mm]	Length* L [m]	Weight [kg/m]	Pack Size** [pcs]
Pre-galvanised	Hot-dipped galv.					
0531 518 001	—	30/30/2.0	2.0	2	1.32	—
0531 518 002	0531 518 003	30/30/3.0	3.0	2	1.94	—

Support L Channel						
Article Number		Section [mm]	Thickness t [mm]	Length* L [m]	Weight [kg/m]	Pack Size** [pcs]
Pre-galvanised	Hot-dipped galv.					
0531 519 001	—	30/30/2.0	2.0	2	0.90	—
0531 519 002	0531 519 003	30/30/3.0	3.0	2	1.33	—

** Pack size are variable depend on customer's each individual orders.