

DATASHEET

IQ3 Mini

The IQ3 Mini gateway connects the SALTO Homelok infrastructure wireless online access points to the cloud, enhancing the platform connectivity with the

BLUEnet Wireless core technology, increasing installations SVN capacity and delivering exceptional user keyless experiences.



TECHNICAL DATA:

Reader dimensions :	53Ø x 32 mm
Weight:	313g
Environmental conditions indoor:	0°C / 60°C non condensing (humidity 0% - 95%)
IP class:	No IP
Certifications:	CE, FCC, IC, ACMA

ELECTRONIC FEATURES:

Input Voltage:	5V
Max. Input Power:	5W
WIFI frequency range:	2400 MHz to 2483.5 MHz (IEEE 802.11b/g/n compliant)
Number of locks per IQ3.0 Mini:	Max. 4
Firmware update:	Via Bluetooth through the Mobile APP
LED lamps:	Multi colour led


SYSTEM CONNECTIVITY:

WIFI	•
------	---

WIFI Tech. Specs

- SSID 32 characters
- Hidden and visible SSID
- WPA2-Personal
- 64 characters ASCII WIFI password (>8 characters)
- Unsecured WIFI without password not supported
- TPC/443 external server connection

TECHNICAL DRAWING:

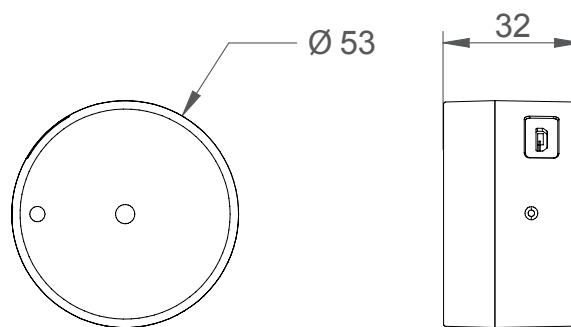

SALTO PLATFORMS:



SVN data-on-card	•
JustIN Mobile	•
BLUEnet Wireless	•
Apple Wallet	•

¹ Salto Homelok. Cloud-based access control platform

COVER FINISH:

White	•
-------	---

Salto Systems.

Get in touch with our team.

Give us a brief summary of your needs, your next project and we'll get back to you.

Spain, UK, France, Germany, Switzerland, The Netherlands, Belgium, Poland, Slovakia, Slovenia, Czech Republic, Denmark, Norway, Sweden, Finland, Italy, Portugal, US (NYC - Atlanta - LV), Canada, Mexico, Costa Rica, Colombia, Puerto Rico, Chile, UAE, India, South Africa, Singapore, China, Hong Kong, Korea, Vietnam, Australia, New Zealand.

