



2/2 or 3/2 way Pneumatic-Rocker-Solenoid Valve

- Compact design with 16 mm width
- DN 0.9 and DN 1.2 (10 bar)
- High lifecycle
- Low power consumption, ATEX Ex ia variant on request
- For pneumatic applications



Product variants described in the data sheet may differ from the product presentation and description.

Can be combined with

	Type 2516 Cable plug, form C according to DIN EN 175301-803	▶
	Type 2505 10 mm socket for Bürkert small solenoid valves	▶

Type description

The direct-acting rocker solenoid valve type 6106 is designed for use on neutral gaseous mediums. The heat input in the medium is minimal, because the housing is separated from the coil by a stainless steel plate. The valves can be mounted directly or also single or manifold mounted. They are used for dosing, filling, mixing and distributing small quantities of medium.

Table of contents

1. General technical data	3
1.1. General data	3
1.2. Medium pressure	4
2. Product variants	4
3. Circuit functions	4
4. Approvals and conformities	5
4.1. General notes	5
4.2. Conformity	5
4.3. Standards	5
4.4. Explosion protection	5
5. Materials	6
5.1. Bürkert resistApp	6
5.2. Material specifications	6
6. Dimensions	7
6.1. Bürkert sub-base variant with cable plug lateral Type 2516	7
6.2. Bürkert sub-base interface, 3-way standard	7
6.3. CNOMO angled sub-base variant with cable plug lateral Type 2516	8
6.4. CNOMO sub-base interface, 3-way	8
7. Product design and assembly	9
7.1. Application examples	9
8. Performance specifications	9
8.1. Electrical data explosion-proof variant Ex ia	9
9. Ordering information	10
9.1. Bürkert eShop	10
9.2. Bürkert product filter	10
9.3. Bürkert Product Enquiry Form	10
9.4. Ordering chart	11
9.5. Ordering chart accessories	12
Mounting set for standard rail	12
Rectangular cable plug Type 2505	12
Cable plug Type 2516, form C according to DIN EN 175301 - 803	13
Multiple manifolds for Bürkert sub-base interface, 3-way	14
Single manifolds for Bürkert sub-base interface, 3-way	15
Multiple manifolds for CNOMO sub-base, 3-way	17
Single manifolds for CNOMO sub-base, 3-way	18

1. General technical data

1.1. General data

Product properties	
Dimensions	Further information can be found in chapter "6. Dimensions" on page 7.
Material	
Seal	FKM
Valve body	Polyamide
Minimum bending radius for flying leads variant	Single bending: 8.5 mm
Orifice	DN 0.9 and DN 1.2 (other orifices on request)
Circuit function	C and D Further information can be found in chapter "3. Circuit functions" on page 4.
Performance data	
Switching time ^{1.)}	
Standard variant	Opening: approx. 25 ms (pressure build-up 0...10 %) Closing: approx. 25 ms (pressure reduction 100...90 %)
Explosion-proof variant	Opening: approx. 25 ms (pressure build-up 0...10 %) Closing: approx. 35 ms (pressure reduction 100...90 %)
Electrical data	
Operating voltage	12 V DC, 24 V DC (other voltages on request)
Duty cycle	100 % continuous operation
Nominal power	
Standard variant	1 W or 2 W
Explosion-proof variant	0.5 W
Switching frequency ^{2.)}	Approx. 16 Hz
Voltage tolerance ^{3.)}	± 10 %
Medium data	
Operating medium	Resistant to neutral gases (5 µm filtering) (see chapter "5.1. Bürkert resistApp" on page 6)
Medium temperature	- 10 °C... + 55 °C
Product connections	
Electrical connection ^{4.)}	Plug contacts according to DIN EN 175301 - 803 form C for cable plug Type 2516 ▶ top/lateral Two FEP-leads 0.2 mm ² (AWG24), length 500 mm Rectangular cable plug Type 2505 ▶ Further information can be found in chapter "9.5. Ordering chart accessories" on page 12.
Port connection	Bürkert sub-base (16 × 27 mm) CNOMO lateral sub-base
Approvals and conformities	
Degree of protection	IP65 with flying leads or cable plug Type 2516 ▶ IP30 with rectangular cable plug Type 2505 ▶
Explosion protection	Further information can be found in chapter "4.4. Explosion protection" on page 5.
Environment and installation	
Installation position	As required, preferably with actuator upright
Ambient temperature	- 10 °C... + 55 °C

1.) Measurement at + 20 °C, 6.3 bar at the valve outlet according to DIN ISO 12238:2001

2.) At ambient temperature + 20 °C



3.) Maximum permitted residual ripple

4.) Other electric connectors and other cable lengths are available on request.

1.2. Medium pressure

Note:

Deviating pressure ranges are possible on request.



Circuit functions	Orifice [mm]	Nominal power [W]	Port connection	Max. differential pressure ¹⁾ [bar]
CF C 3/2-way solenoid valve Direct-acting Normally closed 	0.9	1	Sub-base	Vac...8
	1.2	2	Sub-base	Vac...10
CF D 3/2-way solenoid valve Direct-acting Normally open 	0.9	1	Sub-base	Vac...8
	1.2	2	Sub-base	Vac...10

1.) Pressure data: overpressure to atmospheric pressure

2. Product variants

Bürkert sub-base variant with cable plug lateral	CNOMO angled sub-base variant with cable plug lateral
	

3. Circuit functions

Symbol	Description
	Circuit function C (CF C) 3/2-way solenoid valve Direct-acting Normally closed
	Circuit function D (CF D) 3/2-way solenoid valve Direct-acting Normally open

4. Approvals and conformities

4.1. General notes

- The approvals and conformities listed below must be stated when making enquiries. This is the only way to ensure that the product complies with all required specifications.
- Not all available variants can be supplied with the below mentioned approvals or conformities.

4.2. Conformity

In accordance with the Declaration of Conformity, the product is compliant with the EU Directives.

4.3. Standards


The applied standards which are used to demonstrate compliance with the EU Directives are listed in the EU-Type Examination Certificate and/or the EU Declaration of Conformity.

4.4. Explosion protection

Approval	Description
 	Optional: Explosion protection EU type examination certificate: PTB 01 ATEX 2175 / IECEx PTB 06.0102 ATEX: II 2 G Ex ia IIC T5, T6 Gb IECEx: Ex ia IIC T5, T6 Gb

5. Materials

5.1. Bürkert resistApp

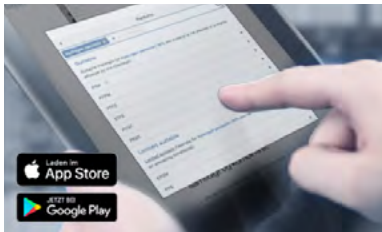


Bürkert resistApp – Chemical resistance chart

You want to ensure the reliability and durability of the materials in your individual application case? Verify your combination of media and materials on our website or in our resistApp.

[Start chemical resistance check](#)

5.2. Material specifications

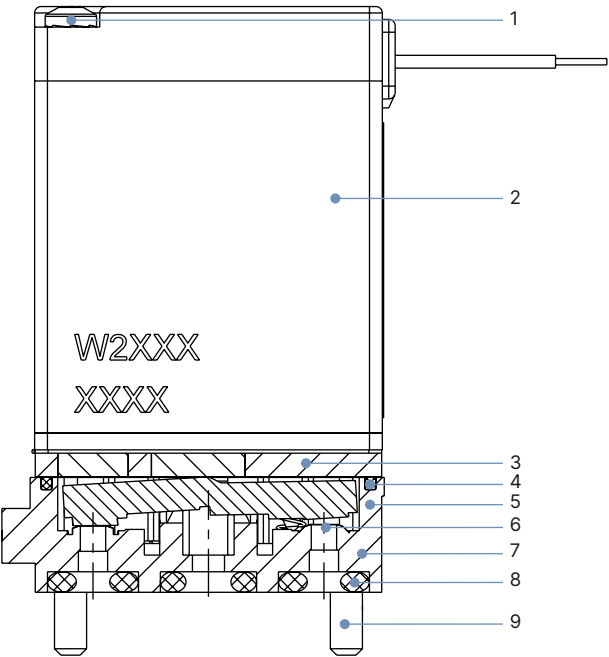

No.	Element	Material
1	Rounded head screw M2	Stainless steel
2	Coil	Epoxy
3	Intermediate plate ^{1.)}	Stainless steel and nickel solder
4	Body seal ^{1.)}	FKM
5	Anchor ^{1.)}	Stainless steel
6	Seat seal ^{1.)}	FKM
7	Valve body ^{1.)}	Polyamide
8	Sub-base seal ^{1.)}	FKM
9	Rounded head screw M2.5	Stainless steel


1.) Wetted

6. Dimensions

6.1. Bürkert sub-base variant with cable plug lateral Type 2516

Note:


Dimensions in mm

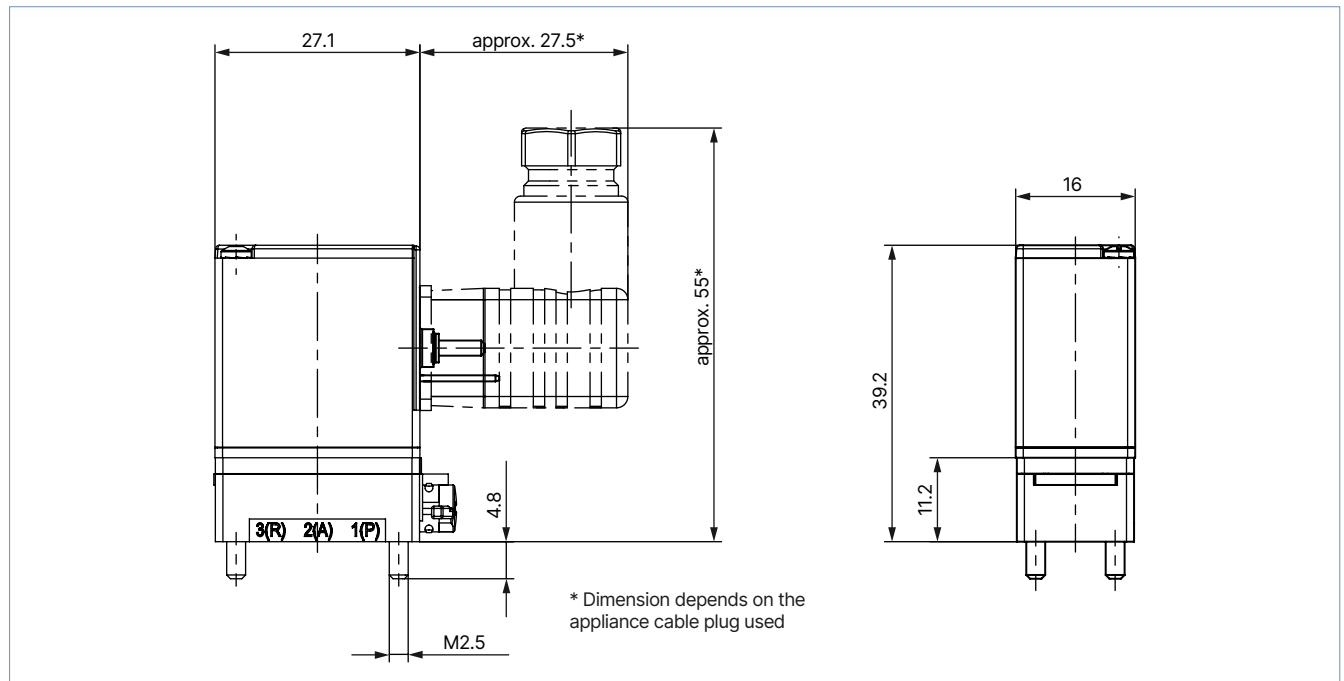

6.2. Bürkert sub-base interface, 3-way standard

Note:


Dimensions in mm

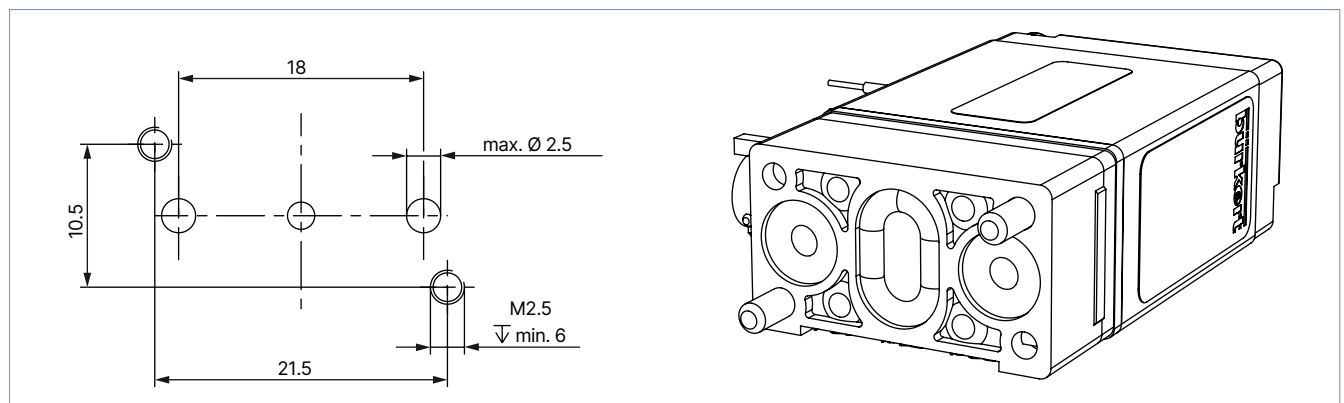

6.3. CNOMO angled sub-base variant with cable plug lateral Type 2516

Note:


Dimensions in mm

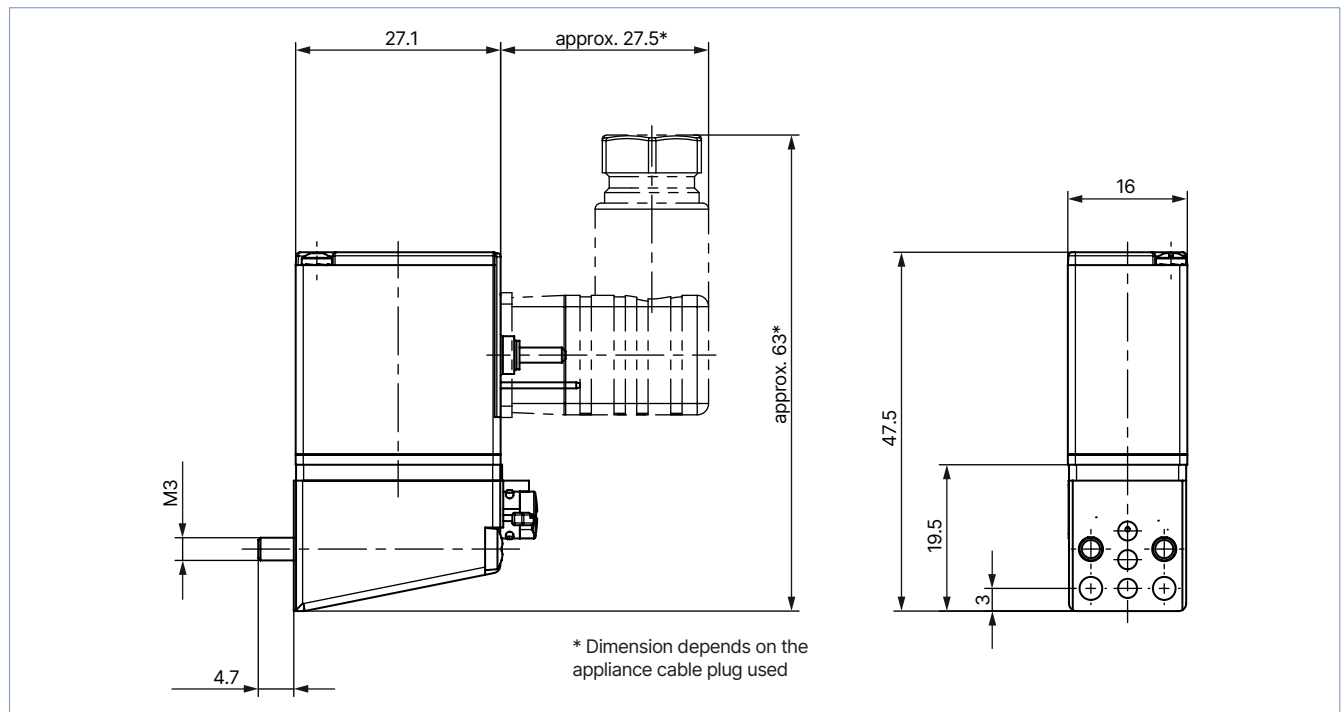

6.4. CNOMO sub-base interface, 3-way





Note:

Dimensions in mm

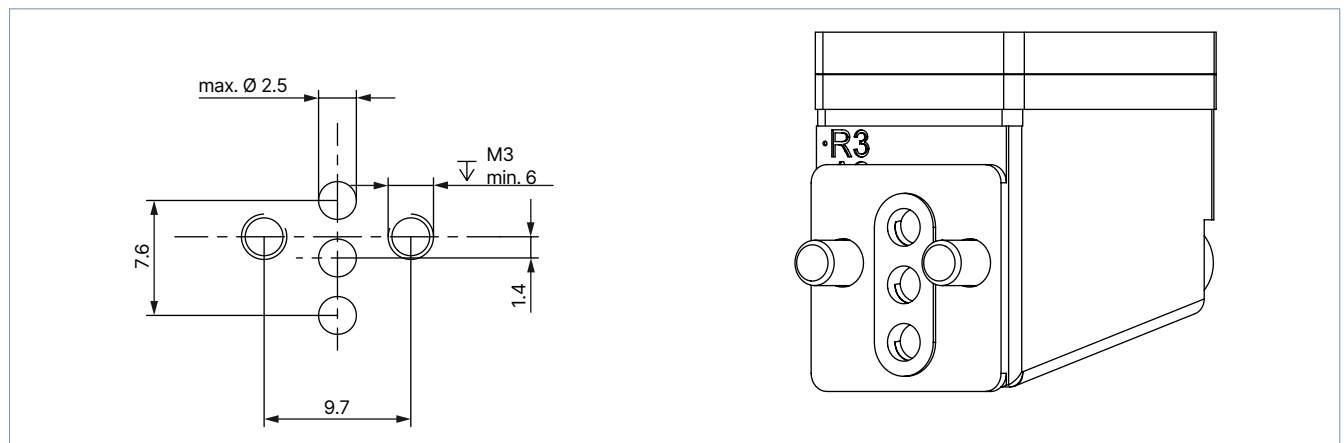

7. Product design and assembly

7.1. Application examples

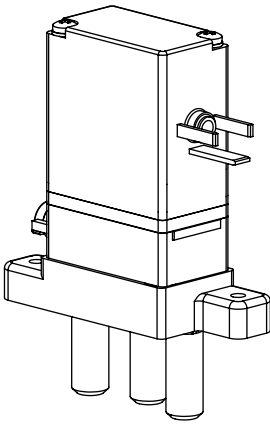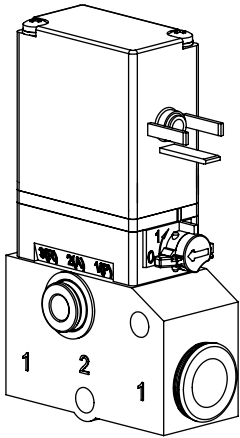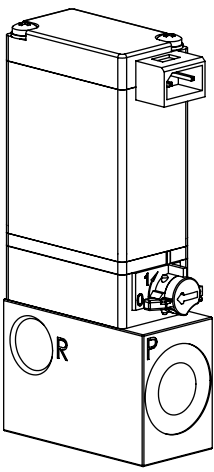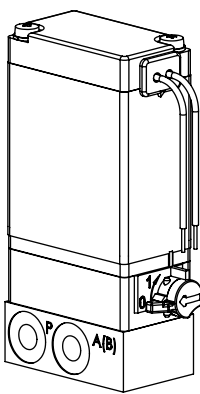
Application	Description	Application	Description
	Device with plug form C lateral and tube spigot connection		Device with plug form C lateral and tube coupling
	Device with rectangular plug and G 1/8 manifold		Device with flying leads and M5 manifold

8. Performance specifications

8.1. Electrical data explosion-proof variant Ex ia

Note:

- The valve is designed to operate on 24 V/DC outputs through an intermediary intrinsically safe apparatus (isolating block or barrier).
- Refer to **Type AC21 ATEX 2175** ► additional instructions for the permitted maximum values/value pairs.
- Type of protection: PTB 01 ATEX 2175: II 2 G Ex ia IIC T5,T6 Gb
IECEx PTB 06.0102: Ex ia IIC T5,T6 Gb



Variant	Resistance at +20 °C ± 4 %	Minimum terminal voltage	Minimum current
	[Ω]	[V]	[mA]
For use with a 300 Ω supply module	320	9.3	29
High resistance variant	475	10.9	23

9. Ordering information

9.1. Bürkert eShop



Bürkert eShop – Easy ordering and quick delivery

You want to find your desired Bürkert product or spare part quickly and order directly? Our online shop is available for you 24/7. Sign up and enjoy all the benefits.

[Order online now](#)

9.2. Bürkert product filter




Bürkert product filter – Get quickly to the right product

You want to select products comfortably based on your technical requirements? Use the Bürkert product filter and find suitable articles for your application quickly and easily.

[Try out our product filter](#)

9.3. Bürkert Product Enquiry Form

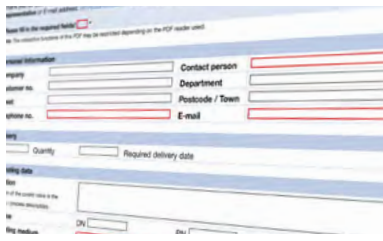

Bürkert Product Enquiry Form – Your enquiry quickly and compactly



Would you like to make a specific product enquiry based on your technical requirements? Use our Product Enquiry Form for this purpose. There you will find all the relevant information for your Bürkert contact. This will enable us to provide you with the best possible advice.

[Fill out the form now](#)

9.4. Ordering chart

Note:

- The valves listed below are equipped with side plug contacts, manual override, sub-base seals and fastening screws (2 x M2.5 x 16 for Bürkert sub-base and 2 x M3 x 30 for CNOMO sub-base).
- Also available without manual override as an option
- Connectors for rectangular plugs and cable plugs are not included in the scope of delivery and must be ordered separately, see **"9.5. Ordering chart accessories"** on page 12.
- Other variants are available on request.

Circuit function	Port connection	Orifice	Q _{Nn} value air ^{1.)} 1→2	Q _{Nn} value air ^{1.)} 2→3	Voltage/ Frequency	Power consumption	Pressure range	Article no.
		[mm]	[l/min]	[l/min]	[V/Hz]	[W]	[bar]	
CF C 3/2-way solenoid valve Direct-acting Normally closed 	Bürkert sub-base	0.9	22	25	24/DC	1	Vac...8	126417 
	CNOMO sub-base							126418 
	Bürkert sub-base	1.2	40	47	24/DC	2	Vac...10	126411 
	CNOMO sub-base							126414 
CF D 3/2-way solenoid valve Direct-acting Normally open 	Bürkert sub-base	0.9	22	25	24/DC	1	Vac...8	126421 
	CNOMO sub-base							126422 
	Bürkert sub-base	1.2	40	47	24/DC	2	Vac...10	126419 
	CNOMO sub-base							126420 

1.) Measurement at +20 °C, 6 bar pressure at valve inlet and 1 bar differential pressure

Further variants on request



Approval

Further information can be found in chapter **"4. Approvals and conformities"** on page 5.



Electrical connection

Industrial plug form C, Bürkert rectangular plug, flying leads connection




Process connection

Bürkert sub-base, CNOMO sub-base, plug-in coupling, tube body

9.5. Ordering chart accessories

Mounting set for standard rail

Note:
Suitable for standard rail TS35 × 7.5 mm

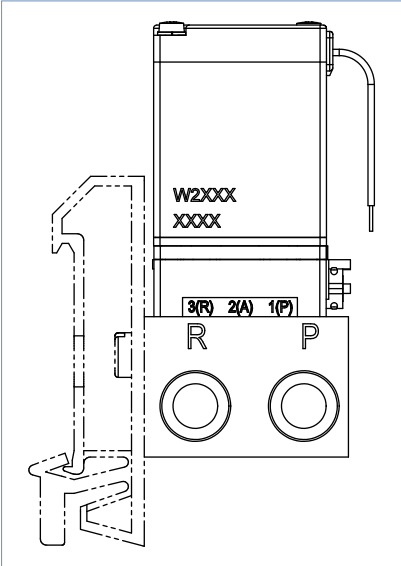

Description	Article no.
Mounting set	629254

Rectangular cable plug Type 2505


Note:
For further variants see data sheet **Type 2505** ►.

Accessories	Description	Article no.
	Cable plug 10 mm with cable, 2-pin, rectangular plug, straight, cable length: 3 m (Type 2505)	252572
	Cable plug 10 mm with cable, 2-pin, rectangular plug, straight, cable length: 5 m (Type 2505)	255194
	Cable plug 10 mm with cable, 2-pin, rectangular plug, straight, cable length: 0,3 m (Type 2505)	644068
	Cable plug 10 mm with cable, 2-pin, rectangular plug, straight, cable length: 0.6 m (Type 2505)	162144
	Cable plug 10 mm, 2-pin, rectangular plug, straight (Type 2505)	644067

Cable plug Type 2516, form C according to DIN EN 175301 - 803

Note:


- Dimensions in mm
- Delivery of cable plug includes a flat seal and a fastening screw.
- For further variants see data sheet **Type 2516** ▶.

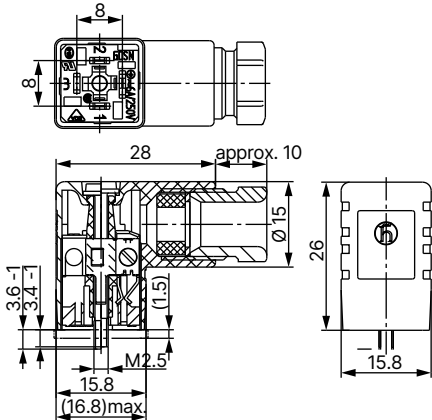Cable plug	Dimensions	Variant	Voltage	Article no.
		Without wiring	0...250 V AC/DC	303141 
		With LED	12...24 V AC/DC	303145 
		With LED and varistor	12...24 V AC/DC	303148 
		With rectifier, LED and varistor	12...24 V AC/DC	303142 

Multiple manifolds for Bürkert sub-base interface, 3-way

Note:

- Dimensions in mm
- Port connection 1: G 1/8
- Port connection 2: M5
- Material: aluminium (black anodized)
- Pay attention to screw protrusion.
- Other variants are available on request.

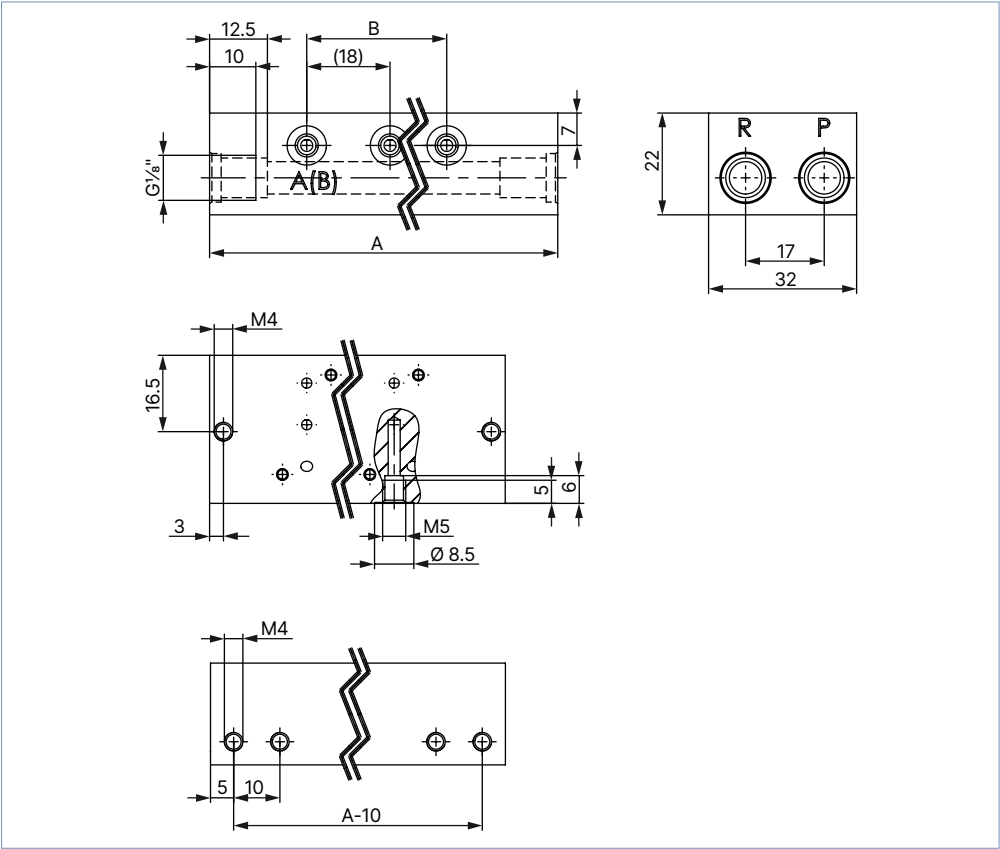


Manifold	A	B	n	Article no.
2-fold	63	18	2	658695 
3-fold	81	36	3	658696 
4-fold	99	54	4	658697 
5-fold	117	72	5	658698 
6-fold	135	90	6	658699 
8-fold	171	126	8	658700 
10-fold	207	162	10	658701 
12-fold	243	198	12	658703 
Blanking plate kit for non-configured valve positions				629327 

Single manifolds for Bürkert sub-base interface, 3-way

Note:

- Dimensions in mm
- Port connection: M5
- Material: aluminium (black anodized)
- Pay attention to screw protrusion.
- Other variants are available on request.

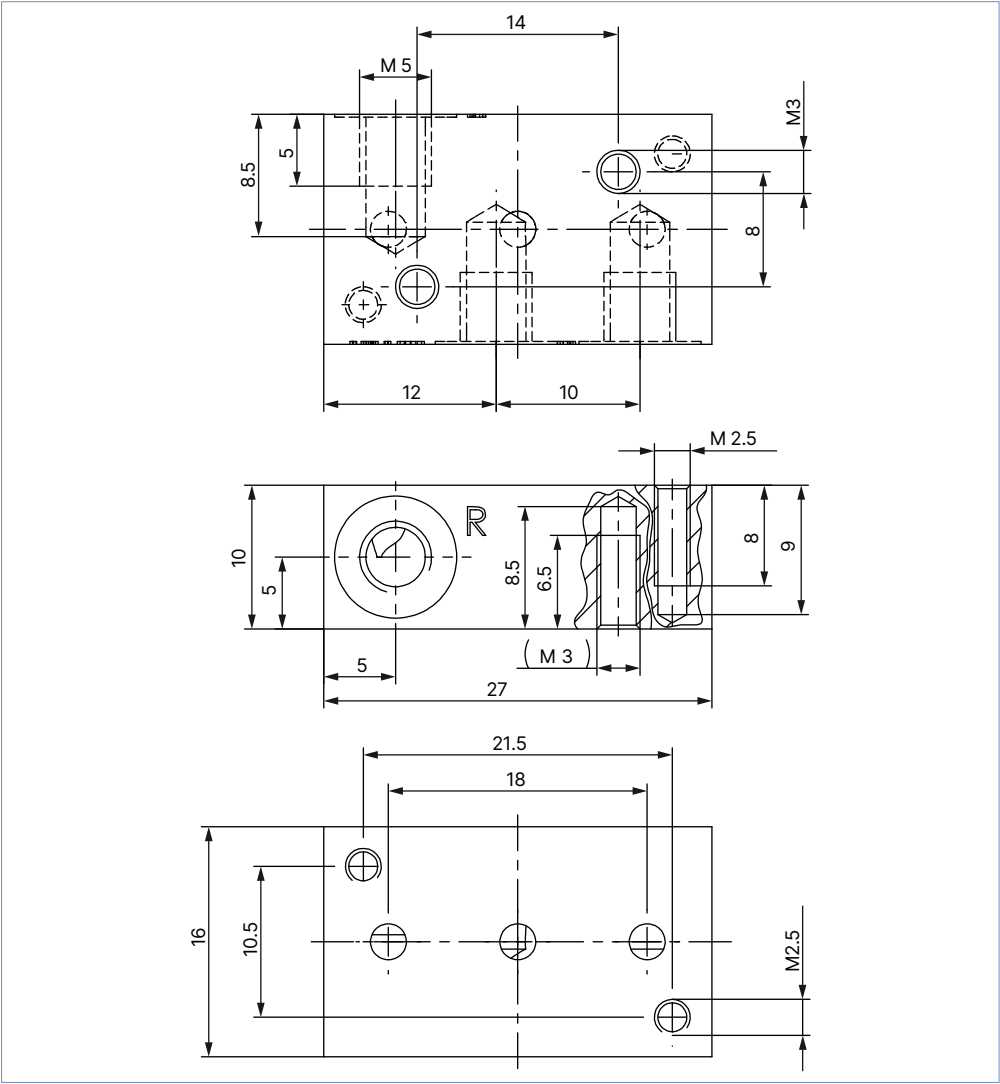


Manifold	Article no.
1-fold	623873

Type 6106

Note:

- Dimensions in mm
- Port connection: G 1/8
- Material: aluminium (black anodized)
- Pay attention to screw protrusion.
- Other variants are available on request.

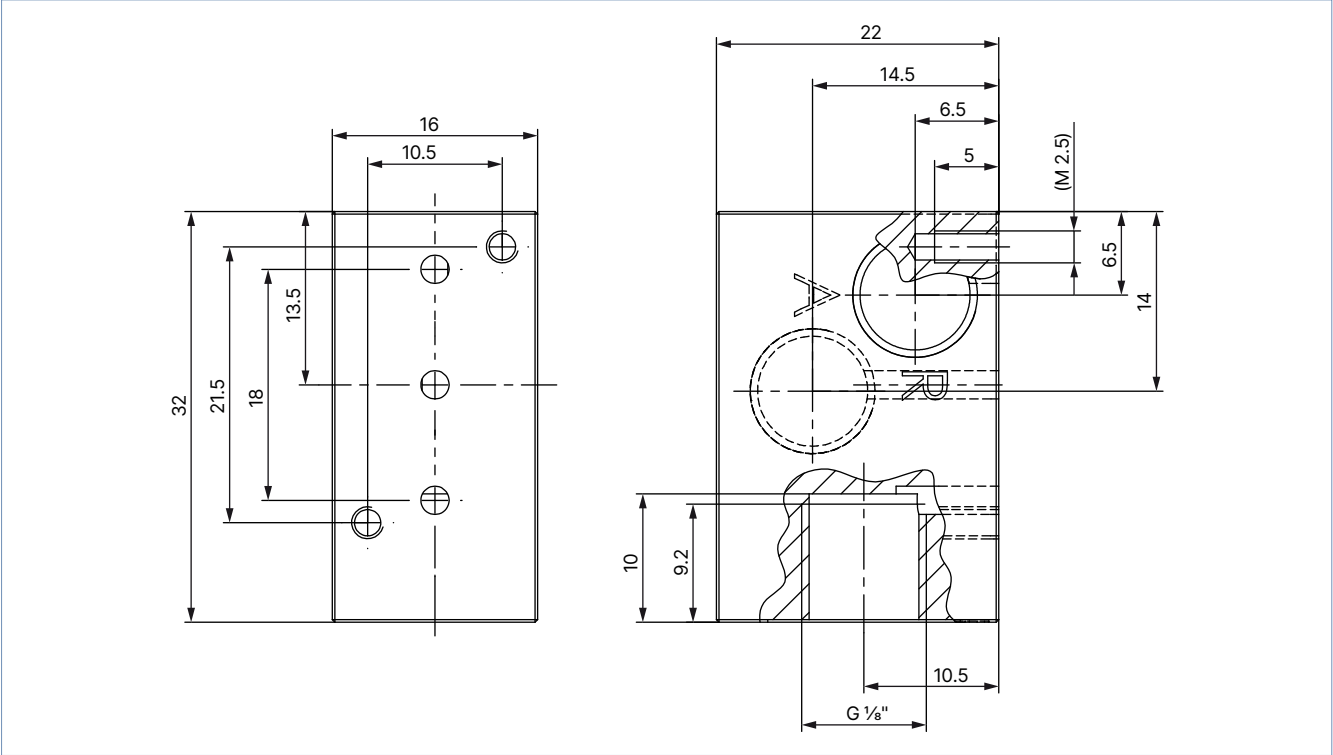

Manifold	Article no.
1-fold	634917 

Note:


-

Manifold	L	Article no.
2 fold	33	639887 
3 fold	49.5	639862 
4 fold	66	639863 
5 fold	82.5	639864 
6 fold	99	639865 
8 fold	132	639866 
10 fold	165	639867 
12 fold	198	639868 
Blanking plate kit for non-configured valve positions		639695 

Single manifolds for CNOMO sub-base, 3-way

Note:

- Dimensions in mm
- Port connection: M5
- Material: aluminium (black anodized)
- Pay attention to screw protrusion.
- Other variants are available on request.

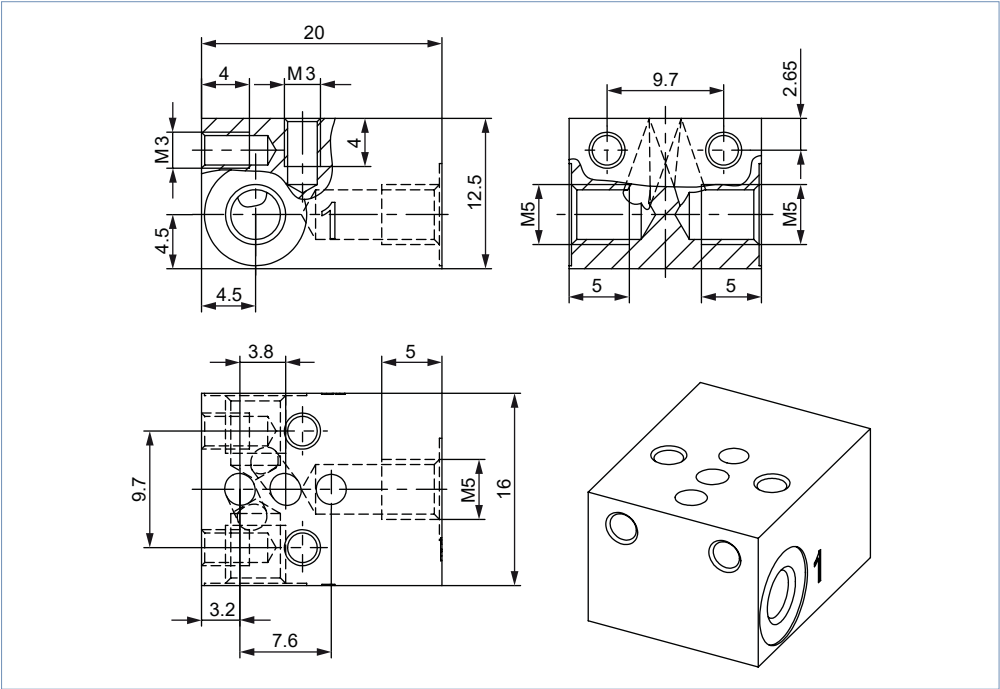

Manifold	Article no.
1-fold	639885