



3/2-way pneumatic cartridge solenoid valve

- Compact design measuring 11 mm in width per station
- Nominal diameter of 0.5 mm (9 bar) to 1.2 mm (1.5 bar)
- Increased service life and reliability
- Low electrical power consumption, and optional ATEX Ex variant
- Designed for optimum integrability

Product variants described in the data sheet may differ from the product presentation and description.

Type description

Our customers' unique applications are becoming ever more complex, and installation space, fluidic performance and cost savings are critical factors. This places greater demands and more exacting requirements on the components used. Type 6164 was developed with the aim of enabling pneumatic actuation through optimal integration of the pilot valve into block or plastic injection-moulded parts, thus achieving a more compact design. The valve's uncompromising reliability, above-average lifespan, and exceptional fluidic properties mean that it, this valve type raises the bar.

Table of contents

1. General technical data	3
2. Circuit functions	4
3. Approvals and conformities	4
3.1. General notes	4
3.2. Conformity	4
3.3. Standards	4
3.4. Explosion protection	4
4. Materials	5
4.1. Bürkert resistApp	5
4.2. Material specifications	5
5. Dimensions	6
5.1. Pin and flying leads variant	6
5.2. Defining of the installation area	7
Cartridge connection (fully recessed)	7
Cartridge connection (half recessed)	8
6. Product connections	9
6.1. Port connection	9
Pin assignment standard variant	9
7. Performance specifications	10
7.1. Electrical data explosion-proof variant Ex i	10
8. Product design and assembly	10
8.1. Application examples	10
9. Product accessories	11
9.1. Single manifold fully recessed	11
10. Ordering information	12
10.1. Bürkert eShop	12
10.2. Bürkert product filter	12
10.3. Bürkert Product Enquiry Form	12
10.4. Ordering chart	13
Standard variant	13
ATEX/IECEx i variant	14
10.5. Ordering chart accessories	14
Single manifold fully recessed	14
Further accessories	15

1. General technical data

Product properties	
Dimensions	Further information can be found in chapter "5. Dimensions" on page 6.
Material	
Seal	FKM
Body	PEEK
Further wetted materials	PA, LCP, MS, stainless steel Further information can be found in chapter "4.2. Material specifications" on page 5.
Permissible leakage	Vac...10 bar (depending on variant) ^{1.)}
Weight	6 g (standard variant)
Orifice	DN 0.5, DN 0.8, DN 1.0, DN 1.2
Circuit function	A, B, C, D and T Further information can be found in chapter "2. Circuit functions" on page 4.
Typical product service life	100,000,000 switching cycles (according to laboratory endurance tests) ^{2.)}
Performance data	
Pressure range	DN 0.5 (Vac...9 bar) ^{1.)} , DN 0.8 (Vac...7.5 bar) ^{1.)} , DN 1.0 (Vac...5 bar) ^{1.)} , DN 1.2 (Vac...1.5 bar) ^{1.)}
Duty cycle	100 % continuous operation
Switching time ^{3.)}	Opening: < 5 ms (pressure build-up 0...10 %) Closing: < 5 ms (pressure reduction 100...90 %)
Electrical data	
Operating voltage	12 or 24 V DC (other voltages on request)
Power consumption	0.7 W 2.8 W/0.3 W (with external electric power reduction) 0.3 W (for explosion proof variant)
Switching frequency	16 Hz
Switching noise	42 dB ^{4.)}
Voltage tolerance	± 10 %
Medium data	
Operating medium	Neutral gases
Medium temperature	- 10 °C...+ 55 °C
Product connections	
Electrical connection	Plug/Solder pin, flying leads
Port connection	Bürkert cartridge connection diagram
Approvals and conformities	
Degree of protection	
Pins	IP00
Male cable plug	IP40
Flying leads	IP54
Explosion protection	Further information can be found in chapter "3.4. Explosion protection" on page 4.
Environment and installation	
Installation position	As required
Ambient temperature ^{5.)}	- 10 °C...+ 55 °C

1.) Technical vacuum (- 0.8 bar)

2.) Life span is dependent on temperature, pressure, seal material and operating conditions.

3.) Measurement at valve outlet according to DIN ISO 12238:2001






4.) According to ISO 3745, test environment suspended in brass block

5.) Depends on the installation situation (see operating instructions), higher temperatures are possible on request.

2. Circuit functions

Note:

See "Pin assignment standard variant" on page 9

Symbol	Description
	Circuit function A (CF A) 2/2-way solenoid valve Direct-acting Normally closed
	Circuit function B (CF B) 2/2-way solenoid valve Direct-acting Normally open
	Circuit function C (CF C) 3/2-way solenoid valve Direct-acting Normally closed
	Circuit function D (CF D) 3/2-way solenoid valve Direct-acting Normally open
	Circuit function T (CF T) 3/2-way solenoid valve Direct-acting Flow direction optional Normally closed

3. Approvals and conformities

3.1. General notes

- The approvals and conformities listed below must be stated when making enquiries. This is the only way to ensure that the product complies with all required specifications.
- Not all available variants can be supplied with the below mentioned approvals or conformities.

3.2. Conformity

In accordance with the Declaration of Conformity, the product is compliant with the EU Directives.

3.3. Standards

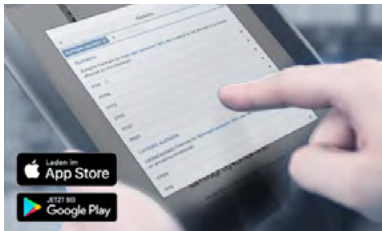
The applied standards which are used to demonstrate compliance with the EU Directives are listed in the EU-Type Examination Certificate and/or the EU Declaration of Conformity.

3.4. Explosion protection

Approval	Description
 	Optional: Explosion protection ATEX: BVS 16 ATEX E 088 X II 2G Ex ib IIC T6...T4 Gb II 2D Ex ib IIIB T155 °C Db IECEX: IECEX BVS 16.0053 X Ex ib IIC T6...T4 Gb Ex ib IIIB T155 °C Db

4. Materials

4.1. Bürkert resistApp

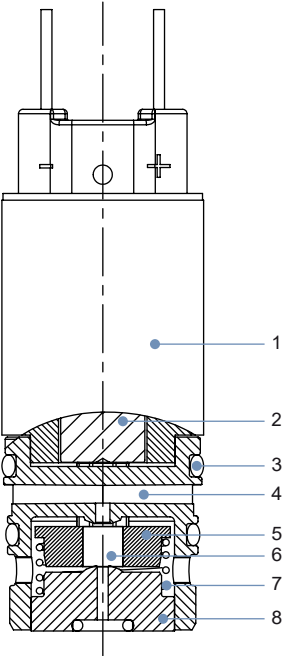


Bürkert resistApp – Chemical resistance chart

You want to ensure the reliability and durability of the materials in your individual application case? Verify your combination of media and materials on our website or in our resistApp.

[Start chemical resistance check](#)

4.2. Material specifications



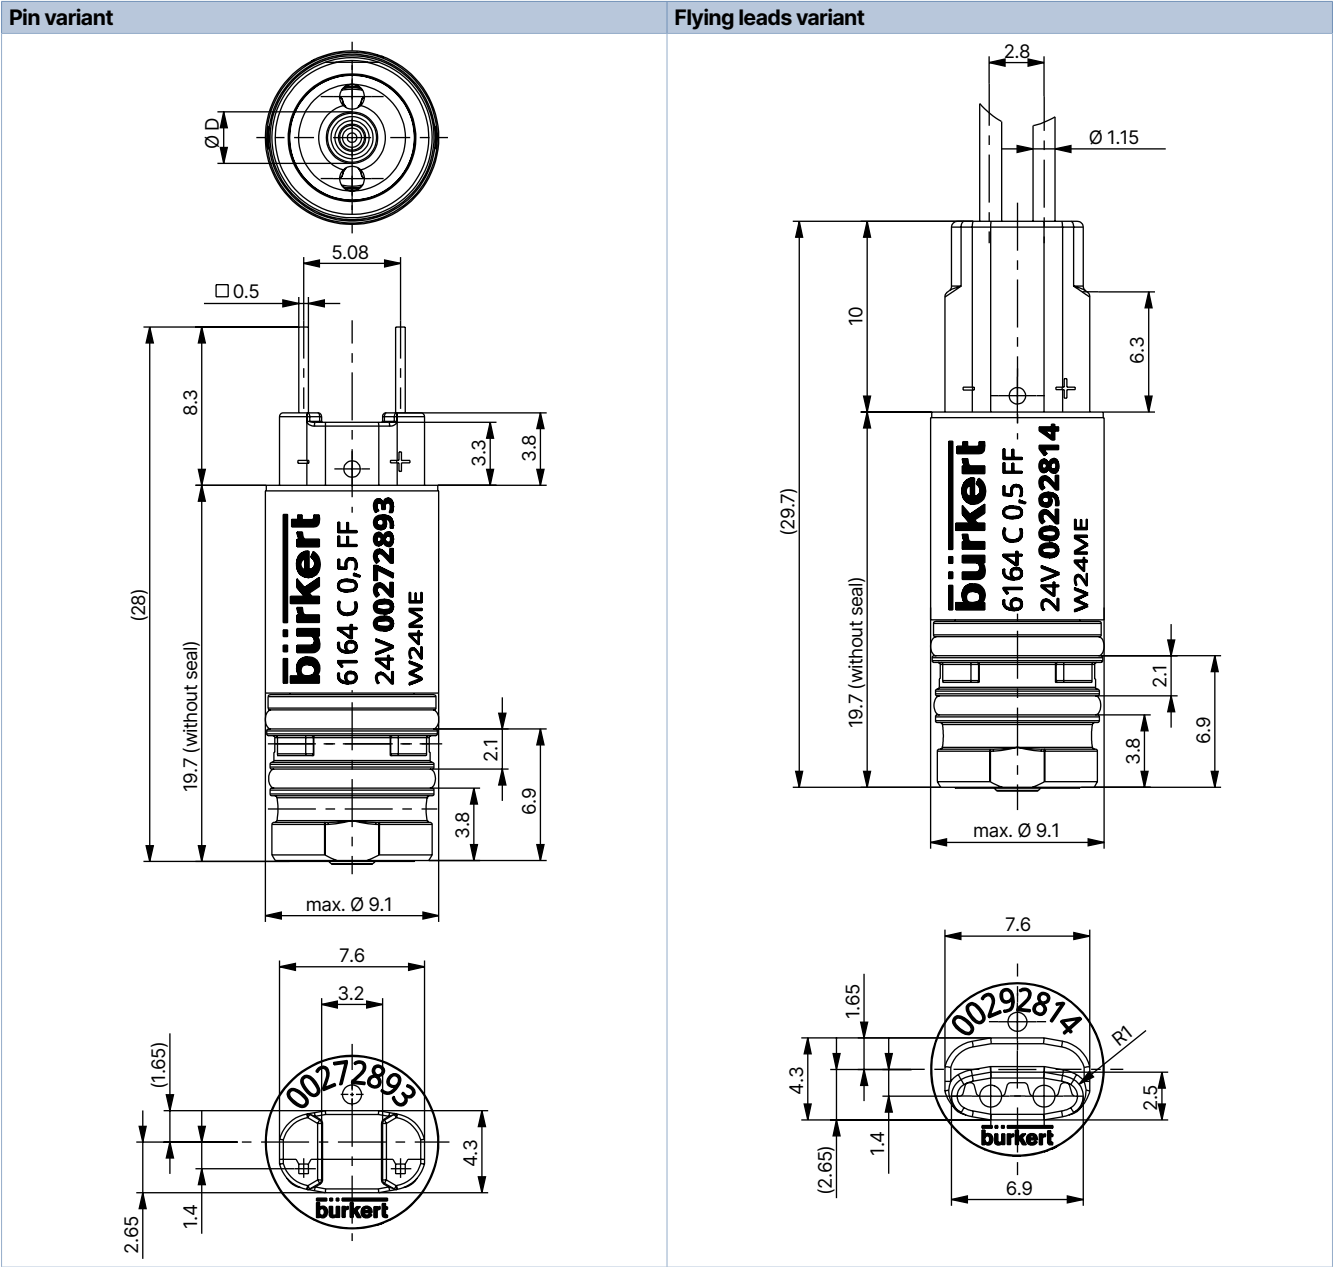
No.	Element	Material
1	Coil housing	Stainless steel 1.4113
2	Core ^{1.)}	Stainless steel 1.4113
3	O-ring ^{1.)}	FKM
4	Body ^{1.)}	PEEK
5	Seal switch ^{1.)}	PA
6	Seal ^{1.)}	FKM
7	Spring ^{1.)}	Stainless steel 1.4310
8	Fitting ^{1.)}	Brass
–	Coil body ^{1.)} (not visible)	LCP

1.) Wetted

5. Dimensions

5.1. Pin and flying leads variant

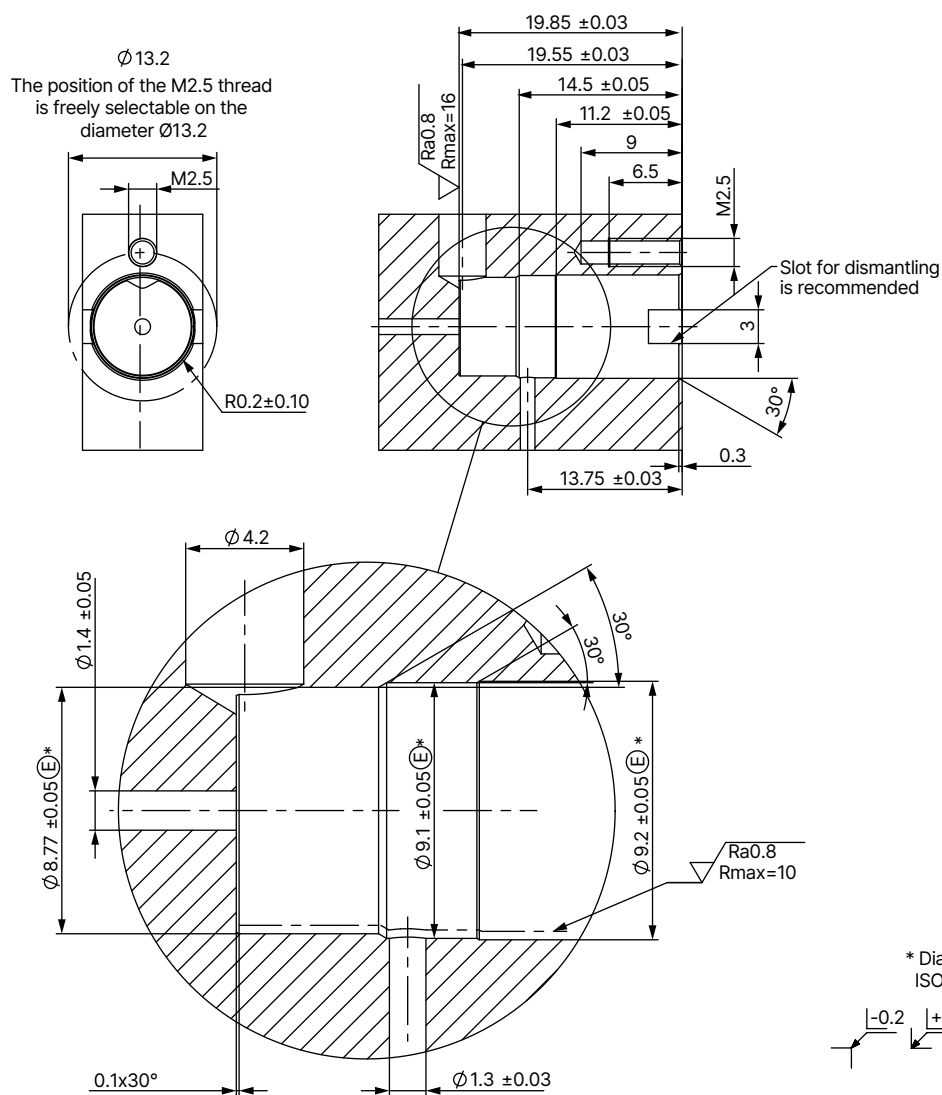
Note:
Dimensions in mm



Variant	Measurement D
DN < 0.65	Ø 2.7
DN > 0.65	Ø 3.3

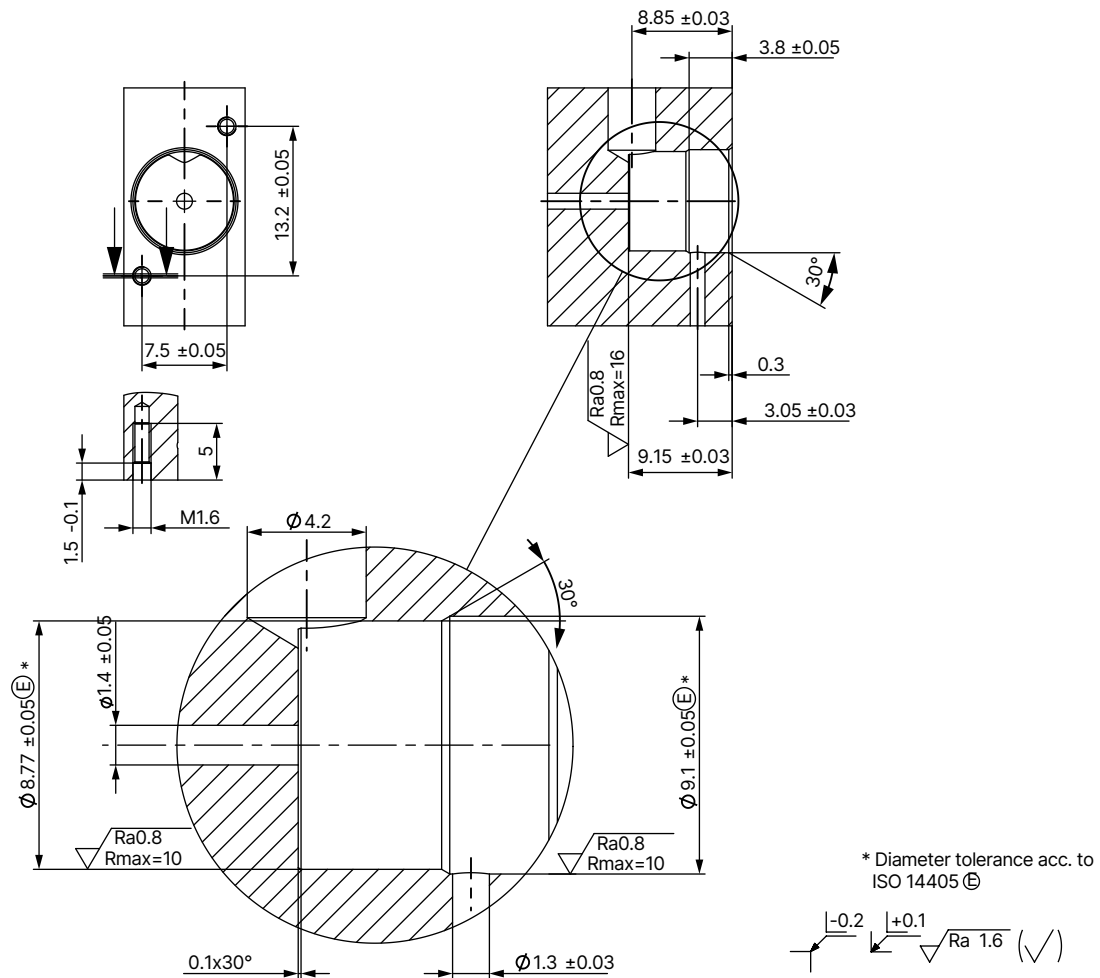
Cartridge connection (fully recessed)

- Dimensions in mm
- Observe max. tightening torque of the screw (see **operating instructions Type 6164** ►)
- Refer to chapter **"8. Product design and assembly"** on page 10 for more information.



Note:

- Dimensions in mm
- The mounting bracket set is required for installation, see **"10.5. Ordering chart accessories"** on page 14.
- Refer to chapter **"8. Product design and assembly"** on page 10 for more information.













6. Product connections

6.1. Port connection

Pin assignment standard variant

Note:

- The pin assignment (marked No. 1, 2 and 3 in the drawings) depends on the circuit function. In the table, compare the respective pin assignment with the corresponding circuit function.
- The polarity must be observed only in the Ex variant.


Circuit functions	Port 1	Port 2	Port 3	3-way
CF A 2/2-way solenoid valve Direct-acting Normally closed  (same valve as for circuit function C, but with blind connection at 3)	Pressure port	Working port	Blind	
CF B 2/2-way solenoid valve Direct-acting Normally open  (same valve as for circuit function D, but with blind connection at 3)	Pressure port	Working port	Blind	
CF C 3/2-way solenoid valve Direct-acting Normally closed  (applicable to circuit function A by using blind connectors on 3)	Pressure port	Working port	Ventilation	
CF D 3/2-way solenoid valve Direct-acting Normally open  (applicable to circuit function B by using blind connectors on 3)	Pressure port	Working port	Ventilation	
CF T 3/2-way solenoid valve Direct-acting Flow direction optional Normally closed 	Pressure port	Working port	Ventilation	

7. Performance specifications

7.1. Electrical data explosion-proof variant Ex i

Note:

- The valve is intended for operation at 24 V DC outputs via the intermedia switching of a corresponding intrinsically safe operating resource (isolating module or barrier).
Refer to **operating instructions Type 6164** ► for the permitted maximum values/value pairs.
- Type of protection:
BVS 16 ATEX E 088 X: II 2G Ex ib IIC T6...T4 Gb & II 2D Ex ib IIIB T155 °C Db
IECEx BVS 16.0053 X: Ex ib IIC T6...T4 Gb & Ex ib IIIB T155 °C Db



Variant	Resistance at +20 °C ± 4 %	Minimum terminal voltage	Minimum current
	[Ω]	[V]	[mA]
Variant for use with 300 Ω supply module	320	9.3	29
High-resistance variant	510	11.7	23

8. Product design and assembly

8.1. Application examples

Single block	Cartridge installation position
Fully recessed multi-manifold	Semi-recessed multi-manifold

9.1. Single manifold fully recessed

- Dimensions in mm

-
- Technical drawing of a mechanical part showing three views: isometric, front, and side. The isometric view shows a rectangular block with a semi-circular cutout on the front face. The front view shows a rectangular block with a semi-circular cutout on the left side, a circular hole on the top face, and a circular hole on the bottom face. The side view shows a rectangular block with a semi-circular cutout on the left side, a circular hole on the top face, and a circular hole on the bottom face. Dimensions are provided for all views.

Description	Article no.
Installation block 1-fold, brass	695913

10. Ordering information

10.1. Bürkert eShop



Bürkert eShop – Easy ordering and quick delivery

You want to find your desired Bürkert product or spare part quickly and order directly? Our online shop is available for you 24/7. Sign up and enjoy all the benefits.

[Order online now](#)

10.2. Bürkert product filter

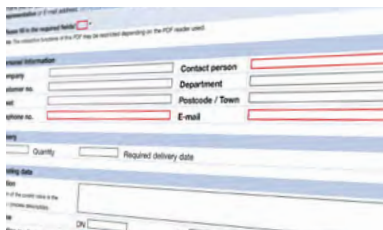


Bürkert product filter – Get quickly to the right product

You want to select products comfortably based on your technical requirements? Use the Bürkert product filter and find suitable articles for your application quickly and easily.

[Try out our product filter](#)

10.3. Bürkert Product Enquiry Form






Bürkert Product Enquiry Form – Your enquiry quickly and compactly

Would you like to make a specific product enquiry based on your technical requirements? Use our Product Enquiry Form for this purpose. There you will find all the relevant information for your Bürkert contact. This will enable us to provide you with the best possible advice.

[Fill out the form now](#)

10.4. Ordering chart

Standard variant



Circuit functions	Port connection	Orifice ventilation 1 → 2	Orifice ventilation 2 → 3	Q _{Nn} value air ^{1.)} 1 → 2	Q _{Nn} value air ^{1.)} 2 → 3	Voltage/ Frequency	Nominal power	Pressure range ^{2.)}	Article no. with connection pins
		[mm]	[mm]	[l/min]	[l/min]	[V/Hz]	[W]	[bar]	
CF C 3/2-way solenoid valve Direct-acting Normally closed 	Bürkert cartridge connection diagram	0.5	0.65	6	9.55	12/DC	0.7	Vac...9	273612 
						24/DC		Vac...9	272893 
						24/DC		2.5...10	281022 
		0.8	1.1	16	20	24/DC	2.8/0.3 ^{3.)}	Vac...7.5	285701 
		1.0	1.1	20	20			Vac...5	285700 
		1.2	1.1	25	22			Vac...1.5	272894 
CF D 3/2-way solenoid valve Direct-acting Normally open 	Bürkert cartridge connection diagram	0.65	0.5	6.5	6	12/DC	0.7	Vac...6	273615 
						24/DC	0.7		273614 
CFT 3/2-way solenoid valve Direct-acting Flow direction optional Normally closed 	Bürkert cartridge connection diagram	0.5	0.65	6	6	24/DC	0.7	Vac...4	292608 

1.) Measurement at + 20 °C, 6 bar at valve inlet and 1 bar differential pressure

2.) Technical vacuum (- 0.8 bar)

3.) External power reduction electronics assembly required

ATEX/IECEx i variant

Circuit functions	Port connection	Orifice ventilation 1→2	Orifice ventilation 2→3	Q _{Nn} value air ^{1.)} 1→2	Q _{Nn} value air ^{1.)} 2→3	Pressure range ^{2.)}	Resistance at + 20 °C ± 4 %	Min. holding current	Article no. with connection pins
		[mm]	[mm]	[l/min]	[l/min]	[bar]	[Ω]	[mA]	
CF C 3/2-way solenoid valve Direct-acting Normally closed 	Bürkert cartridge connection diagram	0.5	0.65	6	9.5	Vac...6	320	29	289027 
							510	23	289028 
CF D 3/2-way solenoid valve Direct-acting Normally open 	Bürkert cartridge connection diagram	0.65	0.5	6.5	6	Vac...4	320	29	o. r.

o. r. = on request

1.) Measurement at + 20 °C, 6 bar at valve inlet and 1 bar differential pressure

2.) Technical vacuum (- 0.8 bar)

Further variants on request

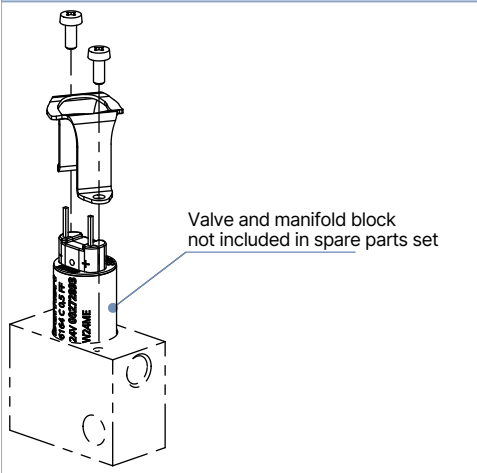
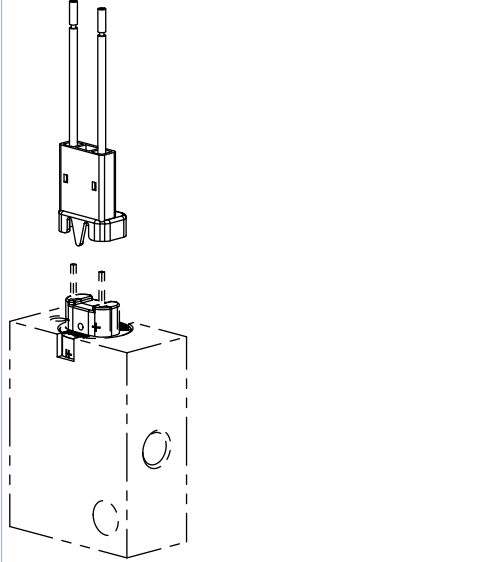
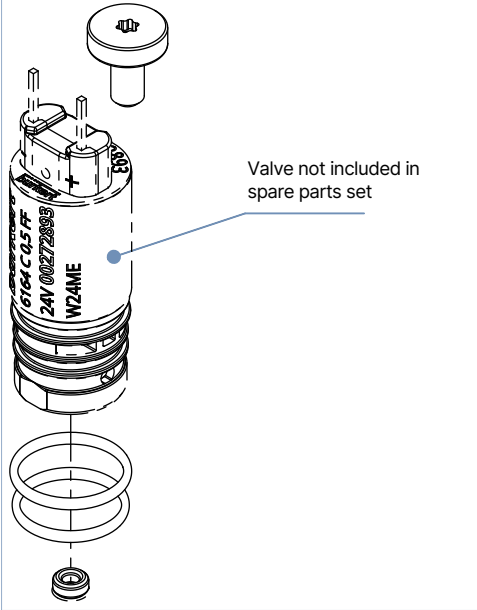
	Additional Leads variant up to 300 mm		Voltage Voltages 9 V, 6 V, 3 V
	Approval Further information can be found in chapter "3. Approvals and conformities" on page 4.		

10.5. Ordering chart accessories

Single manifold fully recessed

Ordering information and dimensions of the single manifold fully recessed can be found in chapter **"9.1. Single manifold fully recessed"** on page 11.

Further accessories

Accessories	Description	Article no.
	Mounting bracket set for semi-recessed mounting for Type 6164 Scope of delivery: • 2 x fastening screws M1.6×5, stainless steel A2 • 1 x mounting bracket 1.4310	696032 
	Plug for Type 6164 with two PVC wires, AWG 24, length 300 mm	695951 
	Spare parts set for Type 6164 Scope of delivery: • 1 x cheese head screw with internal TORX T8 M2.5×5, stainless steel A2 • 2 x O-ring large, FKM • 1 x O-ring small, FKM	696033 