



eCONTROL – Universal controller

- Continuous, 2-point, 3-point, and on/off control
- Proportional regulation
- Sensor inputs (4 - 20 mA, 0 - 10 V, frequency, Pt100)
- Control of proportional, process, and motor valves
- Stored Bürkert proportional valves and flowmeters

Product variants described in the data sheet may differ from the product presentation and description.

Can be combined with

	Type 2301 Pneumatically operated 2-way Globe Control Valve	►
	Type 8012 Flowmeter with paddle wheel for continuous flow measure- ment	►
	Type 6223 Servo-assisted 2-way high-flow proportional valve	►
	Type 8222 Conductivity meter, ELEMENT design	►
	Type 3280 Electromotive 2-way globe proportional valve	►
	Type 3285 Electromotive 2-way globe proportional valve	►

Type description

Universal controller Type 8611 is ideally suited for the construction of compact control systems thanks to its compactness. It is compatible and has been tested with all Bürkert proportional valves and sensors, and can be used in combination with all non-Bürkert control valves with a standard signal (4 - 20 mA/0 - 10 V/PWM output). The process controller with PI behaviour comes with a variety of auxiliary functions. The process actual value can be connected to one of the three analog inputs of the universal controller as a standard signal (4-20 mA / 0-10 V), a frequency signal, or as a signal from a Pt100 resistance temperature sensor. The process setpoint can be specified via a current or voltage standard signal or via the keyboard. Specifically for temperature control tasks, there is the option to create a cascade structure with underlying flow control. A wide range of control tasks in fluid technology can be implemented for both liquid and gaseous media by enabling the control of proportional valves and process valves.

Table of contents

1. General technical data	3
2. Approvals and conformities	4
2.1. General notes	4
2.2. Conformity	4
2.3. Standards	4
3. Dimensions	5
3.1. Fitting installation	5
3.2. Valve installation	6
3.3. Control cabinet installation	6
3.4. Wall installation	7
3.5. Standard rail installation	7
4. Product connections	8
4.1. Connection options and controller variants	8
4.2. Control cabinet installation	9
5. Product installation	10
5.1. Installation options	10
6. Product design and assembly	11
6.1. Areas of application	11
6.2. Application examples	11
7. Ordering information	13
7.1. Bürkert eShop	13
7.2. Bürkert product filter	13
7.3. Ordering chart	13
7.4. Ordering chart accessories	16
7.5. Ordering chart spare parts	16

1. General technical data

Product properties	
Dimensions	Further information can be found in chapter "3. Dimensions" on page 5.
Material	
Housing, cover	PC (polycarbonate), + 20 % glass fibre
Front panel film	Polyester
Screw	Stainless steel
Multi-pin plug	CuZn, nickel-plated
Wall-mounting holder	PVC
Display	Dual-line 8-digit LCD with backlight
Electrical data	
Operating voltage	24 V DC $\pm$ 10 %, filtered and regulated
Power consumption	Approximately 2 W (without valve, without sensor input)
Power supply cable	0.5 mm ² maximum cross section, maximum 100 m, shielded
Electrical connections	Multi-pin plug: 8-pin M12 plug, 4-pin M8 plug, 3-pin M8, terminal block Insert for direct installation with electrical connection in accordance with DIN EN 175301 - 803
Controller mode	PI control, 2-point and 3-point, cascaded up to 2 binary outputs with windows and hysteresis mode
Input data	
Set-point value	Sourcing mode
Standard 4...20 mA	Maximum input impedance: 70 Ω Resolution: 5.5 μ A
Standard 0...10 V	Maximum input impedance: 11.5 k Ω Resolution: 2.5 mV
Sensor	Sourcing mode
Standard 4...20 mA	Maximum input impedance: 70 Ω Resolution: 5.5 μ A
Standard 0...10 V	Maximum input impedance: 11.5 k Ω Resolution: 2.5 mV
Frequency	
Input 1	External sensor Minimum 0.25 Hz / maximum 1 kHz Input impedance: > 1 k Ω Signal type: sinus, square, triangle pulse (> 3000 mVpp, maximum 30 Vpp)
Input 2	Internal Hall sensor Minimum 0.25 Hz / maximum 1 kHz (only with Bürkert Type S030 flow fitting)
Pt100 (2-wire)	Measuring range: 0...+ 200 °C Measuring current: 1 mA Measuring error: < 0.5 °C
Binary input	Input impedance: 10 k Ω Operating threshold: 3...30 V Maximum frequency: 1 kHz
Output data	
Power supply sensor / actuator	24 V DC, maximum 1 A
Total load of all outputs	Maximum 1.5 A
Continuous signal	
Standard signal 4...20 mA	Maximum loop resistance: 680 Ω Accuracy: 0.5 %
Standard signal 0...10 V	Maximum current: 20 mA Accuracy: 0.5 %
Discontinuous signal	
2 transistor outputs for PWM ¹⁾ or PTM ¹⁾ signal	Control frequency 20 Hz...9999 Hz Resolution maximum: 16 bit (depending on frequency) Maximum current load: 1.5 A Switching voltage: 24 V DC
Binary output	
Transistor output (PNP) (configurable)	Maximum current load: 1.5 A Switching voltage: 24 V DC

Approvals and conformities

Further information can be found in chapter “2. Approvals and conformities” on page 4.

Environment and installation

Ambient temperature	0...+ 70 °C (operating and storage)
Degree of protection	IP65
Height above sea level	Maximum 2000 m
Relative humidity (environment)	≤ 80 %, without condensation

1.) PWM = pulse width modulation

PTM = pulse time modulation

2. Approvals and conformities

2.1. General notes

- The approvals and conformities listed below must be stated when making enquiries. This is the only way to ensure that the product complies with all required specifications.
- Not all available variants can be supplied with the below mentioned approvals or conformities.

2.2. Conformity

In accordance with the Declaration of Conformity, the product is compliant with the EU Directives.

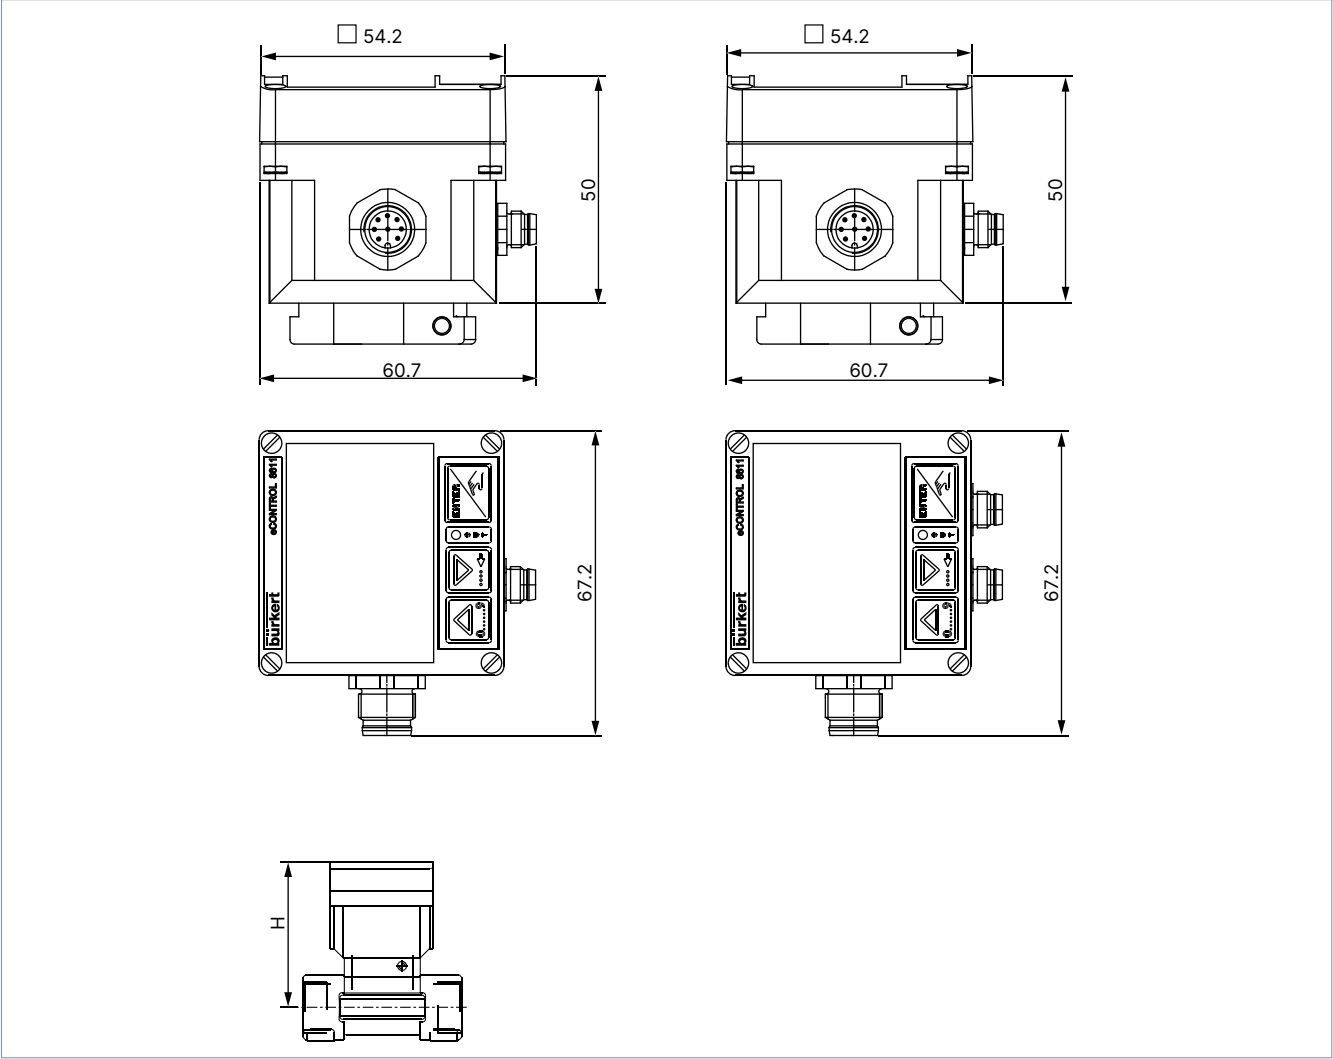
2.3. Standards

The applied standards which are used to demonstrate compliance with the EU Directives are listed in the EU-Type Examination Certificate and/or the EU Declaration of Conformity.

3. Dimensions

3.1. Fitting installation

Note:
Dimensions in mm, unless otherwise stated

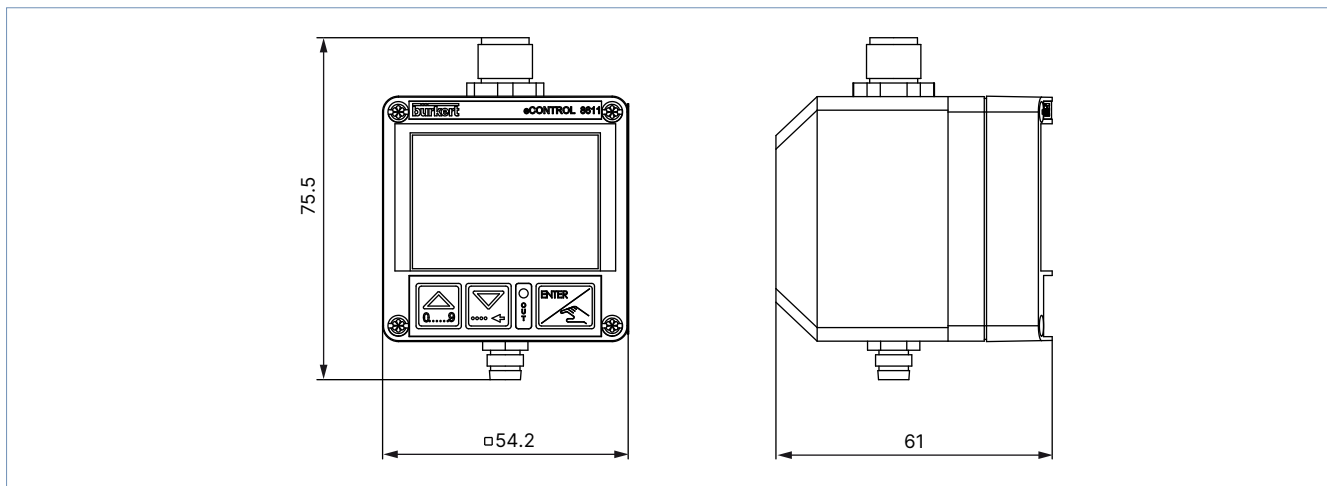


DN	H [mm]
06	79.5
08	79.5
15	84.5
20	82.0
25	82.2
32	85.8
40	89.6
50	95.7
65	98.7

3.2. Valve installation

Note:

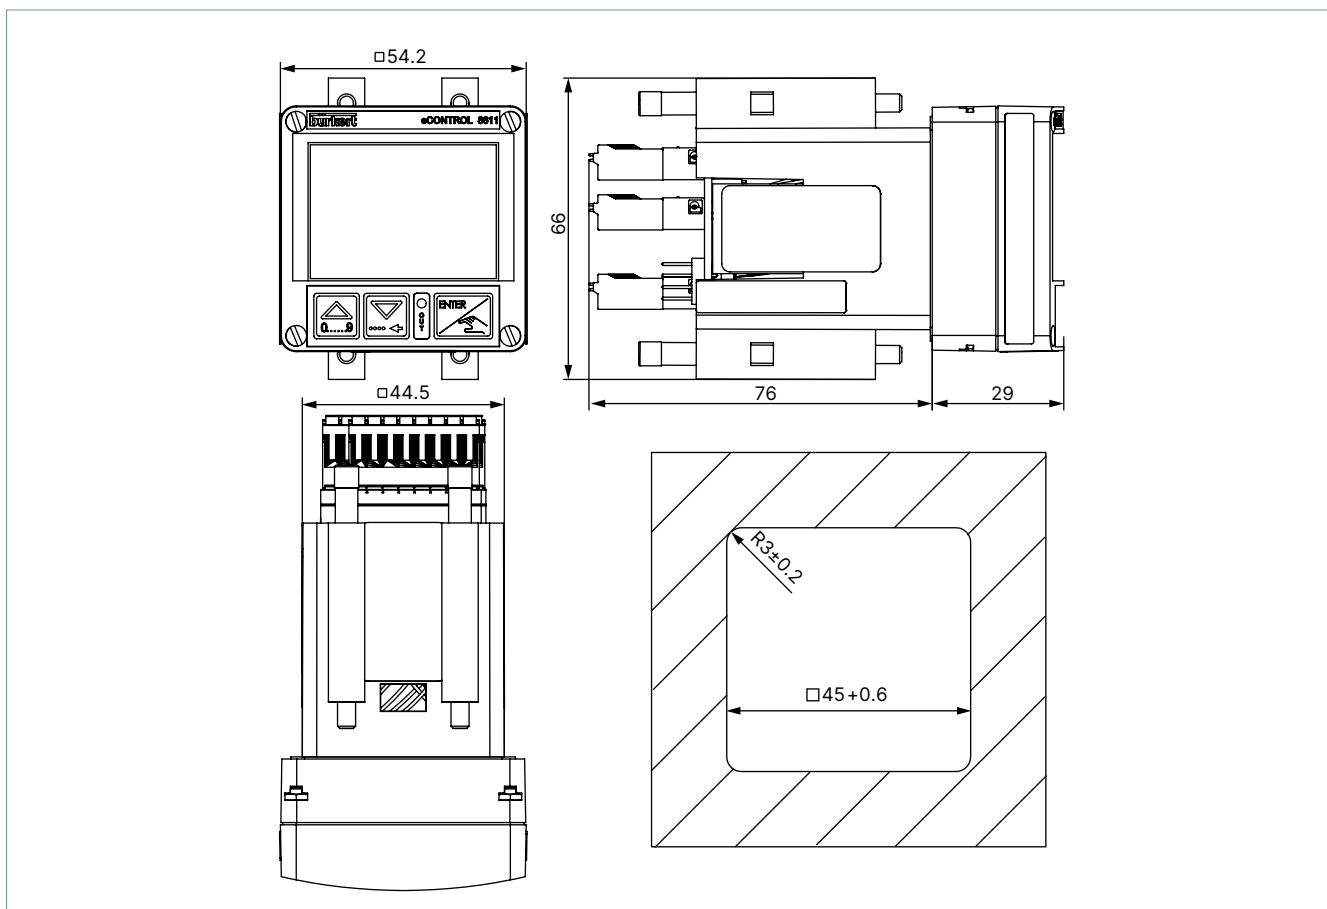
Dimensions in mm, unless otherwise stated



3.3. Control cabinet installation

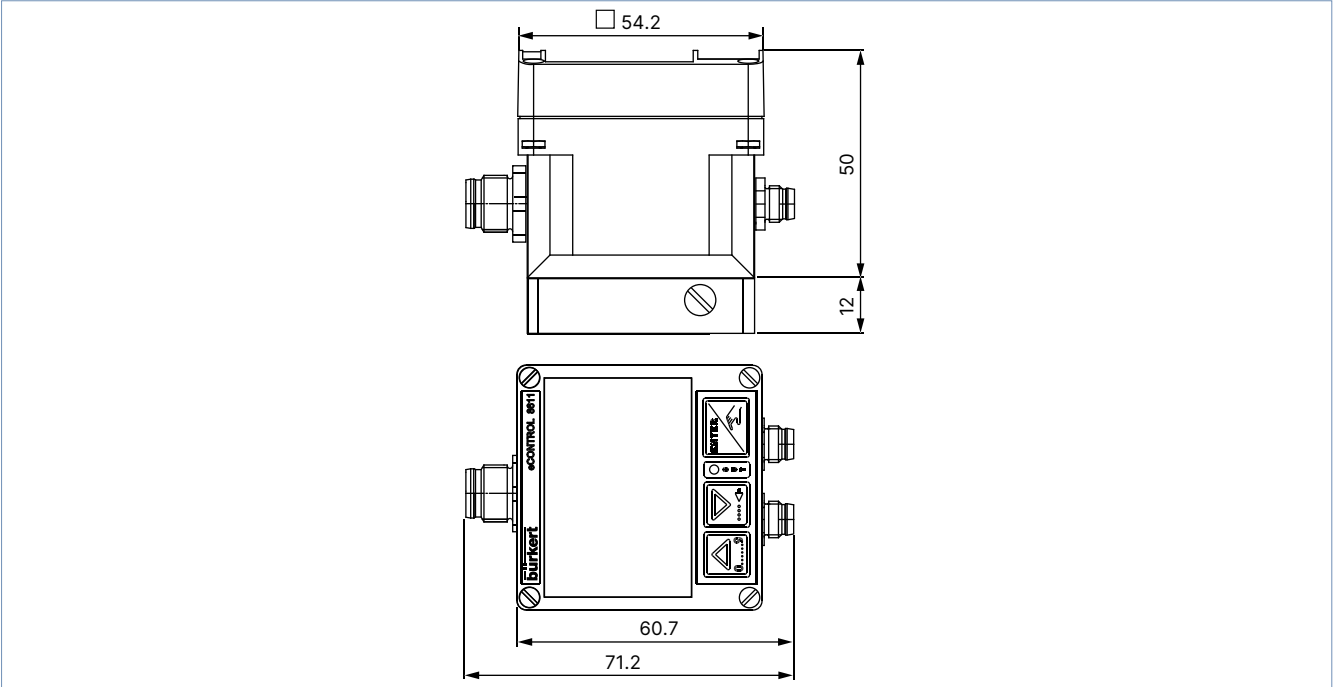
Note:

Dimensions in mm, unless otherwise stated



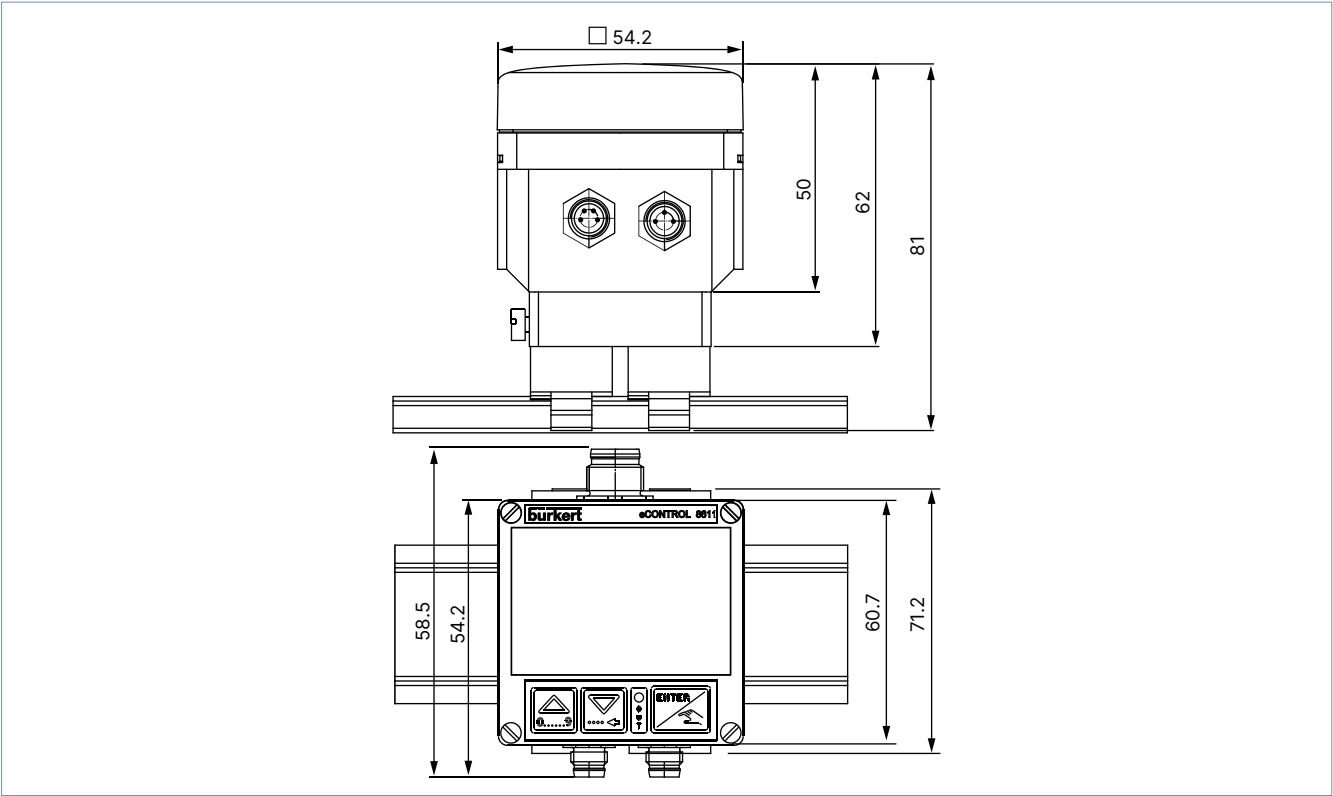
3.4. Wall installation

Note:
Dimensions in mm, unless otherwise stated



3.5. Standard rail installation





Note:
Dimensions in mm, unless otherwise stated



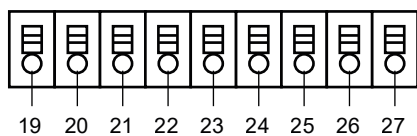
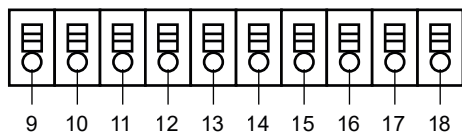
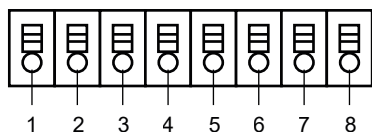
4. Product connections

4.1. Connection options and controller variants

Assembly	Flow sensor fitting installation		Wall or standard rail installation	Valve installation
Sensor	Integrated Hall sensor, without external sensor input	Integrated Hall sensor, with external sensor input	Without Hall sensor, with external sensor input	Without Hall sensor, with external sensor input
Control	Flow control	- Temperature control with flow display - Temperature control with flow input for cascade control - Ratio control	- Temperature control - Pressure control - Flow control	- Temperature control - Pressure control - Flow control
	 M12, 8-pin M8, 4-pin	 M12, 8-pin M8, 4-pin M8, 3-pin	 M12, 8-pin M8, 4-pin M8, 3-pin	 M12, 8-pin M8, 3-pin

M12 plug, 8-pin  - Power supply 24 V DC - Set-point value (0...10 V / 4...20 mA) - Binary input - Process value output (0...10 V / 4...20 mA) - PI control output (0...10 V / 4...20 mA) - Binary output	M8 plug, 3-pin  - Sensor input 4...20 mA / 0...10 V, frequency or Pt100 - Sensor power supply 24 V DC
M8 plug, 4-pin  - PI control output: 1 x PWM output 2 x PTM output 0...10 V/4...20 mA output and power supply actuator 24 V DC (only Article no. 182383 and 567181)	PWM output  PWM output for solenoid control valve according to DIN 175301 - 803

4.2. Control cabinet installation



Terminal block 1


Terminal block 2

Terminal block 3



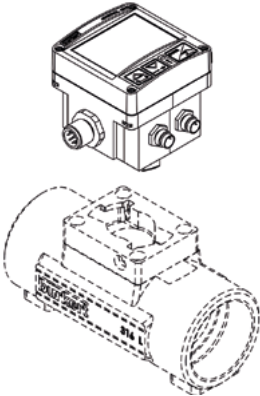



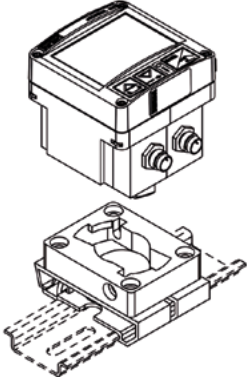
Jumper 1 (NPN/PNP)

Jumper 2 (NPN/PNP)



5. Product installation

5.1. Installation options

Installation on flow sensor fitting	Installation on proportional valve
 eCONTROL Type 8611	 eCONTROL Type 8611
Installation in a control cabinet	Installation on a wall
 eCONTROL Type 8611	 eCONTROL Type 8611 Adapter for wall installation
Installation on standard rail	
 eCONTROL Type 8611 Adapter for rail installation	

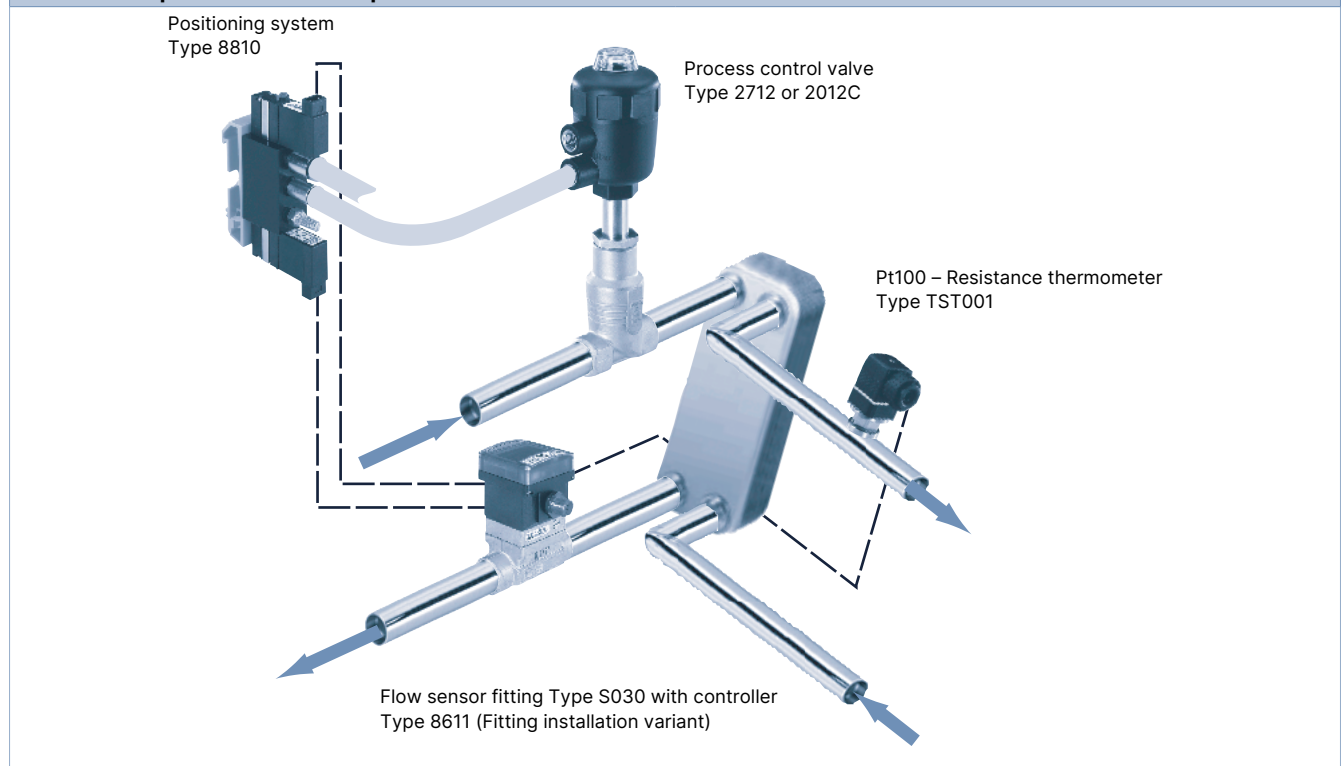
6. Product design and assembly

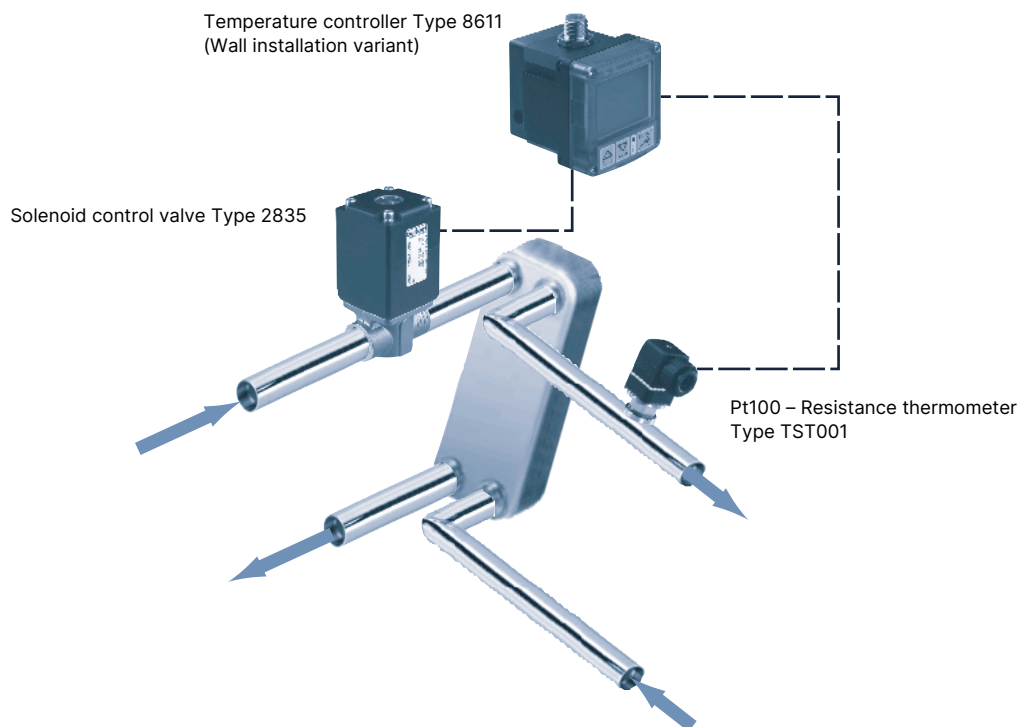
6.1. Areas of application

- Flow control, ratio control
- Pressure control
- Temperature control
- Conductivity control
- pH control
- Level control

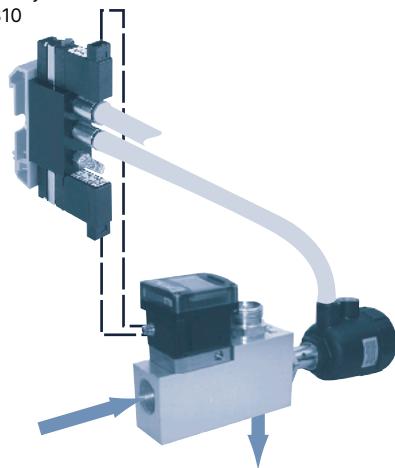
6.2. Application examples

Cascaded temperature control with process control valve



Temperature control with solenoid control valve

Flow control with process control valve

Positioner system
Type 8810



Block with integrated flow sensor fitting Type S030,
process control valve Type 2012C and controller Type 8611

Multi-channel solution

With process control valve



With solenoid control valve



7. Ordering information

7.1. Bürkert eShop



Bürkert eShop – Easy ordering and quick delivery

You want to find your desired Bürkert product or spare part quickly and order directly? Our online shop is available for you 24/7. Sign up and enjoy all the benefits.

[Order online now](#)

7.2. Bürkert product filter



Bürkert product filter – Get quickly to the right product

You want to select products comfortably based on your technical requirements? Use the Bürkert product filter and find suitable articles for your application quickly and easily.

[Try out our product filter](#)

7.3. Ordering chart

A controller Type 8611 consists of:

Fitting installation (DN 06...DN 65)

- An electronic module Type 8611
- An Inline fitting Typ S030, DN 06...DN 65 (see **data sheet Type S030** ►, has to be ordered separately)

Wall installation

- An electronic module Type 8611
- A wall installation adapter (included)

Standard installation




- An electronic module Type 8611
- A rail installation adapte (included in the scope of delivery)

Valve installation




- An electronic module Type 8611
- A proportional valve (see the relevant data sheets, must be ordered separately)

Control cabinet installation

- An electronic module Type 8611
- 4 mounting brackets and 1 seal (included)

Installation variant	Sensor input		Controller outputs ¹⁾		Operating voltage	Set-point value setting default	Process value output ¹⁾	Binary In/Out	Article no.
									
Sensor fitting 	–	Flow rate (sensor fitting Type S030)	1 x PWM 2 x PTM	4...20 mA 0...10 V	24 V DC	4...20 mA 0...10 V	4...20 mA 0...10 V	1 x Bin In 1 x Bin Out	177455 
	Temperature (Pt100)	Flow rate (sensor fitting Type S030)	1 x PWM 2 x PTM	4...20 mA 0...10 V	24 V DC	4...20 mA 0...10 V	4...20 mA 0...10 V	1 x Bin In 1 x Bin Out	177458 
	Ratio or temp. (4...20 mA / 0...10 V)	Flow rate (sensor fitting Type S030)	1 x PWM 2 x PTM	4...20 mA 0...10 V	24 V DC	4...20 mA 0...10 V	4...20 mA 0...10 V	1 x Bin In 1 x Bin Out	177463 
	Ratio (frequency NPN)	Flow rate (sensor fitting Type S030)	1 x PWM 2 x PTM	4...20 mA 0...10 V	24 V DC	4...20 mA 0...10 V	4...20 mA 0...10 V	1 x Bin In 1 x Bin Out	208048 
Wall 	–	Flow rate (frequency NPN)	1 x PWM 2 x PTM	4...20 mA 0...10 V	24 V DC	4...20 mA 0...10 V	4...20 mA 0...10 V	1 x Bin In 1 x Bin Out	177454 
	–	Temperature (Pt100)	1 x PWM 2 x PTM	4...20 mA 0...10 V	24 V DC	4...20 mA 0...10 V	4...20 mA 0...10 V	1 x Bin In 1 x Bin Out	177457 
	–	All sensors with standard signal (4...20 mA / 0...10 V)	1 x PWM 2 x PTM	4...20 mA 0...10 V	24 V DC	4...20 mA 0...10 V	4...20 mA 0...10 V	1 x Bin In 1 x Bin Out	177462 
	–	All sensors with standard signal (4...20 mA / 0...10 V)	4...20 mA 0...10 V	–	24 V DC	4...20 mA 0...10 V	–	1 x Bin In 1 x Bin Out	182383 
Standard rail 	–	Flow rate (frequency NPN)	1 x PWM 2 x PTM	4...20 mA 0...10 V	24 V DC	4...20 mA 0...10 V	4...20 mA 0...10 V	1 x Bin In 1 x Bin Out	177091 
	–	Temperature (Pt100)	1 x PWM 2 x PTM	4...20 mA 0...10 V	24 V DC	4...20 mA 0...10 V	4...20 mA 0...10 V	1 x Bin In 1 x Bin Out	177456 
	–	All sensors with standard signal (4...20 mA / 0...10 V)	1 x PWM 2 x PTM	4...20 mA 0...10 V	24 V DC	4...20 mA 0...10 V	4...20 mA 0...10 V	1 x Bin In 1 x Bin Out	177460 

1.) Either PWM/PTM or 4...20 mA/0...10 V can be selected as PI control output. If 4...20 mA/0...10 V is selected as PI output, the process value is not available.

Installation variant	Sensor input	Controller outputs	Set-point value setting default	Process value output	Binary In/Out	Article no.
						
Proportional valve 	Temperature (Pt100)	1 x PWM	4...20 mA 0...10 V	4...20 mA 0...10 V	1 x Bin In 1 x Bin Out	204642 
	Flow rate (frequency NPN)	1 x PWM	4...20 mA 0...10 V	4...20 mA 0...10 V	1 x Bin In 1 x Bin Out	204639 
	All sensors with standard signal (4...20 mA / 0...10 V)	1 x PWM	4...20 mA 0...10 V	4...20 mA 0...10 V	1 x Bin In 1 x Bin Out	186289 






Installation variant	Sensor input	Controller outputs ¹⁾	Set-point setting	Process value output	Binary In/Out	Article no.
	External					
Control cabinet 	2 x frequency (NPN/PNP) 1 x 4...20 mA / 0...10 V 1 x Pt100 ratio control	1 x PWM 2 x PTM 1 x 4...20 mA/0...10 V	4...20 mA 0...10 V	4...20 mA ¹⁾ 0...10 V	1 x Bin In 2 x Bin Out	210206 

1.) Either PWM/PTM or 4...20 mA/0...10 V can be selected as PI control output. If 4...20 mA/0...10 V is selected as PI output, the process value is not available.

7.4. Ordering chart accessories

Note:

Must be ordered separately.

Description		Article no.
	Actuating system Type 8810 for pneumatic actuators with rail installation adapter	204458 
	4-pin M8 female angle coupling with self-locking screw connection and 2 m moulded cable (valve output)	918718 
	4-pin M8 female angle coupling with self-locking screw connection and 5 m moulded cable (valve output)	919412 
	3-pin M8 female angle coupling with self-locking screw connection and 2 m moulded cable (sensor input)	918717 
	3-pin M8 female angle coupling with self-locking screw connection and 5 m moulded cable (sensor input)	919410 
	4-pin M8 female coupling, straight with snap connection and 2 m moulded cable (valve output)	919060 
	3-pin M8 female coupling, straight with snap connection and 2 m moulded cable (sensor input)	918039 
	8-pin M12 female connector, straight with screw connection and 2 m moulded cable (PUR) (power supply)	919061 
	8-pin M12 female coupling, straight with screw connection, to assemble (power supply)	918998 
	2-pin female connector, straight with 3 m cable (for connection to actuating system Type 8810)	133486 
	2-pin female connector, straight with 5 m cable (for connection to actuating system Type 8810)	167494 
	2-pin female connector, straight with 0.3 m wire (for connection to actuating system Type 8810)	644068 
	2-pin female connector, straight with 0.6 m wire (for connection to actuating system Type 8810)	162144 

7.5. Ordering chart spare parts

Note:

Must be ordered separately.

Description		Article no.
	Wall installation adapter	427098 
	Standard rail adapter	655980 
	Mounting brackets (set of 4 pieces)	560225 