


Specifications

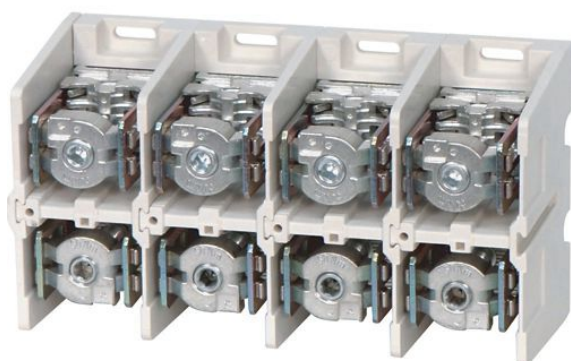

Eaton 048747

Eaton xEffect K-Type Terminal Enclosures
Switch- & Controlgear Enclosure. Connection
terminal, 630A, 4p, flat/round

General specifications

PRODUCT NAME	Eaton xEffect K-Type Terminal Enclosures Switch- & Controlgear Enclosure
CATALOG NUMBER	048747
MODEL CODE	K2X240/4
EAN	4015080487470
PRODUCT LENGTH/DEPTH	225 mm
PRODUCT HEIGHT	140 mm
PRODUCT WIDTH	254 mm
PRODUCT WEIGHT	6.94 kg
COMPLIANCES	RoHS conform



Powering Business Worldwide

Additional information

FEATURES	Contact safe
SPECIAL FEATURES	• Conversion kits for strip terminal in cable connection available separately • Terminal covers available separately • Including labels for terminal marking U, V, W - X, Y, Z - L1, L2, L3 - T1, T2, T3 - PE, N, PEN, protective earth (ground) symbol • Relationship of rated operational current - terminal capacity to IEC/EN 60439, VDE 0660 Part 500 or EN 50021 • Outer terminal for round or sectoral conductor, other side for Cu strip
SUITABLE FOR	Useful for stranded conductors
USED WITH	General switchboard accessory Accessory panel building

Technical data - electrical

RATED INSULATION VOLTAGE (UI)	1000 VAC
RATED OPERATION CURRENT (IE)	630 A

Delivery programme

ACCESSORY/SPARE PART TYPE	Terminals, 160 – 1000 A Terminations
NOMINAL CURRENT	630 A
NUMBER OF POLES	Four-pole
TYPE	• Accessory panel building • General switchboard accessory

Technical data - mechanical

CONDUCTOR CROSS SECTION, INPUT - MAX	300 mm ²
CONDUCTOR CROSS SECTION, INPUT - MIN	70 mm ²
CONDUCTOR CROSS SECTION, INPUT AWG - MAX	600 mm ²
CONDUCTOR CROSS SECTION, INPUT AWG - MIN	0 mm ²
CONDUCTOR CROSS SECTION, OUTPUT - MAX	300 mm ²
CONDUCTOR CROSS SECTION, OUTPUT - MIN	70 mm ²
CONDUCTOR CROSS SECTION, OUTPUT AWG -	0 mm ²

MAX	
CONDUCTOR CROSS SECTION, OUTPUT AWG - MIN	0 mm ²
MOUNTING METHOD	Screw
NUMBER OF CONNECTIONS (LESS THAN 6 MM SQUARED)	0
NUMBER OF CONNECTIONS (LESS THAN AWG 6)	0
NUMBER OF CONNECTIONS (GREATER THAN 25 MM SQUARED)	8
NUMBER OF CONNECTIONS (GREATER THAN 250 KCMIL)	0
NUMBER OF CONNECTIONS (10 MM SQUARED)	0
NUMBER OF CONNECTIONS (16 MM SQUARED)	0
NUMBER OF CONNECTIONS (25 MM SQUARED)	0
NUMBER OF CONNECTIONS (250 KCMIL)	0
NUMBER OF CONNECTIONS (AWG 2)	0
NUMBER OF CONNECTIONS (AWG 4)	0
NUMBER OF CONNECTIONS (AWG 4/0)	0
NUMBER OF CONNECTIONS (AWG 6)	0
NUMBER OF CONNECTIONS (TOTAL)	8
NUMBER OF INPUTS	1
NUMBER OF OUTPUTS	2
TERMINAL CAPACITY (ALUMINUM CABLE)	150 mm ² - 240 mm ² (1x) 95 mm ² - 185 mm ² (2x)
TERMINAL CAPACITY (CONDUCTOR)	40 mm x 15 mm
TERMINAL CAPACITY (COPPER BAND)	21 mm x 1 mm (11x) for flat strip 16 mm x 0.8 mm (10x) for flat strip
TERMINAL CAPACITY (COPPER/ALUMINUM)	150 mm ² - 300 mm ² (1x) 50 mm ² - 240 mm ² (2x)

CABLE)

CONNECTION TYPE

Clamp
Screwing

Resources

CATALOGUES

[eaton-panel-building-accessories-catalog-ca008008en-en-us.pdf](#)

DECLARATIONS OF CONFORMITY

[eaton-xeffect-k-type-terminals-declaration-of-conformity-en-us.pdf](#)

[eaton-enclosures-declaration-of-conformity-eu250263en.pdf](#)

DRAWINGS

[eaton-insulated-boards-terminals-xeffect-k-type-terminal-dimensions-004.eps](#)

[eaton-distribution-boards-terminals-xeffect-k-type-terminal-3d-drawing-002.eps](#)

[eaton-control-panels-terminals-xeffect-k-type-terminal-3d-drawing.eps](#)

INSTALLATION INSTRUCTIONS

[IL015110ZU](#)

[eaton-connection-terminal-k2-240-il015112zu.pdf](#)

MCAD MODEL

[eaton-distribution-blocks-mcad-drawings-k2x240-4.dwg](#)

[eaton-K2X240_4-3d-model.stp](#)

SYSTEM OVERVIEW

[eaton-control-panels-terminals-xeffect-k-type-terminal-explosion-drawing-002.eps](#)

PROJECT NAME:
PROJECT NUMBER:
PREPARED BY:
DATE:



Eaton Corporation plc Eaton House
30 Pembroke Road
Dublin 4, Ireland
Eaton.com

© 2026 Eaton. All Rights Reserved.

Follow us on social media to get the latest product and support information.

