


Specifications

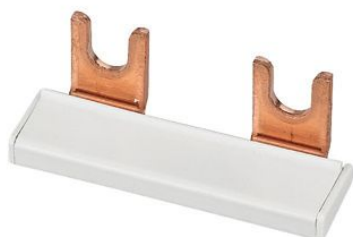

Eaton 102722

Eaton xEnergy Basic LV systems Low voltage switchgear. Connection segment for 1-pole terminal block, L x W x H = 16 x 44 x 14 mm

General specifications

PRODUCT NAME	Eaton xEnergy Basic other accessory
CATALOG NUMBER	102722
MODEL CODE	BPZ-CB-44/14
EAN	4015081025824
PRODUCT LENGTH/DEPTH	44 mm
PRODUCT HEIGHT	16 mm
PRODUCT WIDTH	14 mm
PRODUCT WEIGHT	0.03 kg
COMPLIANCES	RoHS conform

Additional information

FEATURES	Insulated
SUITABLE FOR	2 devices

Technical data - electrical

ELECTRIC CONNECTION TYPE	Fork
RATED OPERATIONAL VOLTAGE (UE) - MAX	690 V
RATED SHORT-TIME WITHSTAND CURRENT (ICW)	4.2 kA
RATED SURGE VOLTAGE	1 KV
RATED UNINTERRUPTED CURRENT (IU)	125 A

Resources

BROCHURES	eaton-xenergy-basic-light-brochure-br014024-en-us.pdf
CATALOGUES	eaton-distribution-boards-xenergy-basic-catalog-ca014010en-en-us.pdf
DRAWINGS	eaton-xenergy-basic-lv-systems-dimensions.eps
FLYERS	eaton-xenergy-basic-profisnap-flyer-fl019008en-en-us.pdf
SALES NOTES	eaton-f3a-flange-flyer-fl019005en-en-us.pdf

PROJECT NAME:

PROJECT NUMBER:

PREPARED BY:

DATE:

Delivery programme

COLOR	Other
NUMBER OF POLES	Single-pole
NUMBER OF PHASES	1

Technical data - mechanical

CROSS SECTION	20 mm ²
NUMBER OF MODULAR SPACINGS	0
SUITABLE FOR NUMBER OF DEVICES	2



Eaton Corporation plc Eaton House
30 Pembroke Road
Dublin 4, Ireland
Eaton.com

© 2026 Eaton. All Rights Reserved.

Follow us on social media to get the latest product and support information.

