


Specifications

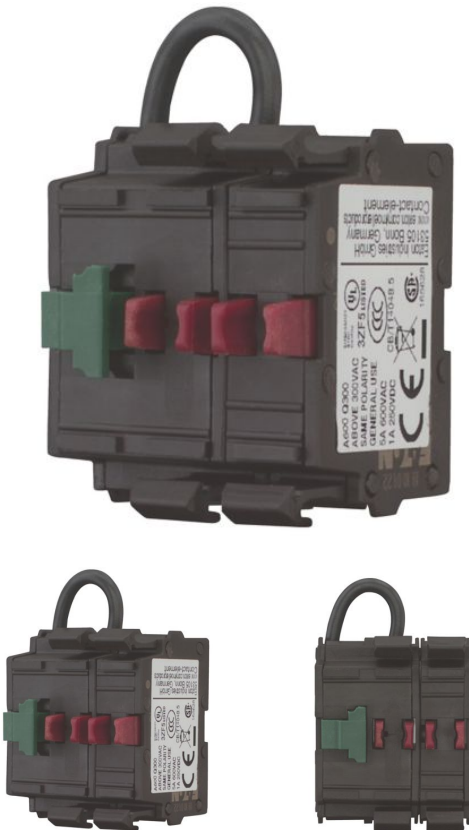

Eaton 121474

Eaton Moeller® series M22 Self-monitoring contact elements, Screw terminals, Front fixing, 1 N/O, 2 NC, 24 V 3 A

General specifications

PRODUCT NAME	Eaton Moeller® series M22 contact element
CATALOG NUMBER	121474
MODEL CODE	M22-K02SMC10
EAN	4015081192922
PRODUCT LENGTH/DEPTH	38 mm
PRODUCT HEIGHT	30 mm
PRODUCT WIDTH	32 mm
PRODUCT WEIGHT	0.032 kg
COMPLIANCES	CE Marked
CERTIFICATIONS	CSA Std. C22.2 No. 94-91 CSA Std. C22.2 No. 14-05 UL 508 EN 60947-5 IEC 60947 UL Category Control No.: NISD CE IEC 60947-5-1 IEC/EN 60947-5 CSA CSA File No.: 012528_C_000 CSA-C22.2 No. 94-91 UL UL File No.: E340491 CSA Class No.: 3211-03 CSA-C22.2 No. 14-05
CATALOG NOTES	Contacts with safety function, by positive opening to IEC/EN 60947-5-1

Actuator

ACTUATING FORCE - MAX	10 N
KNOB TRAVEL	5.7 mm

Communication

CONNECTION TO SMARTWIRE-DT	No
-----------------------------------	----

Climatic environmental conditions

AMBIENT OPERATING TEMPERATURE - MAX	70 °C
AMBIENT STORAGE TEMPERATURE - MAX	85 °C
AMBIENT OPERATING TEMPERATURE - MIN	-25 °C
AMBIENT STORAGE TEMPERATURE - MIN	-25 °C
CLIMATIC PROOFING	Damp heat, cyclic, to IEC 60068-2-30 Damp heat, constant, to IEC 60068-2-78

Contacts

FORCE FOR POSITIVE OPENING - MIN	30 N
NUMBER OF CONTACTS (CHANGE-OVER CONTACTS)	0
NUMBER OF CONTACTS (NORMALLY CLOSED CONTACTS)	2
NUMBER OF CONTACTS (NORMALLY OPEN CONTACTS)	1

Design verification

10.10 TEMPERATURE RISE	The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 SHORT-CIRCUIT RATING	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 ELECTROMAGNETIC COMPATIBILITY	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 MECHANICAL FUNCTION	The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.
10.2.2 CORROSION RESISTANCE	Meets the product standard's requirements.
10.2.3.1 VERIFICATION OF THERMAL STABILITY OF ENCLOSURES	Meets the product standard's requirements.
10.2.3.2 VERIFICATION OF RESISTANCE OF INSULATING MATERIALS TO NORMAL HEAT	Meets the product standard's requirements.
10.2.3.3 RESIST. OF INSUL. MAT. TO ABNORMAL HEAT/FIRE BY INTERNAL ELECT. EFFECTS	Meets the product standard's requirements.
10.2.4 RESISTANCE TO ULTRA-VIOLET (UV) RADIATION	Meets the product standard's requirements.
10.2.5 LIFTING	Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 MECHANICAL IMPACT	Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 INSCRIPTIONS	Meets the product standard's requirements.
10.3 DEGREE OF PROTECTION OF ASSEMBLIES	Does not apply, since the entire switchgear needs to be evaluated.
10.4 CLEARANCES AND CREEPAGE DISTANCES	Meets the product standard's requirements.
10.5 PROTECTION	Does not apply, since the

Electrical rating

RATED INSULATION VOLTAGE (UI)	500 V
RATED OPERATIONAL CURRENT (IE) AT AC-15, 115 V	6 A
RATED OPERATIONAL CURRENT (IE) AT AC-15, 220 V, 230 V, 240 V	6 A
RATED OPERATIONAL CURRENT (IE) AT AC-15, 380 V, 400 V, 415 V	4 A
RATED OPERATIONAL CURRENT (IE) AT AC-15, 500 V	2 A
RATED OPERATIONAL CURRENT (IE) AT DC-13, 110 V	0.6 A
RATED OPERATIONAL CURRENT (IE) AT DC-13, 220 V, 230 V	0.3 A
RATED OPERATIONAL CURRENT (IE) AT DC-13, 24 V	3 A
RATED OPERATIONAL CURRENT (IE) AT DC-13, 42 V	1.7 A
RATED OPERATIONAL CURRENT (IE) AT DC-13, 500 V	0.1 A
RATED OPERATIONAL CURRENT (IE) AT DC-13, 60 V	1.2 A

AGAINST ELECTRIC SHOCK	entire switchgear needs to be evaluated.
10.6 INCORPORATION OF SWITCHING DEVICES AND COMPONENTS	Does not apply, since the entire switchgear needs to be evaluated.
10.7 INTERNAL ELECTRICAL CIRCUITS AND CONNECTIONS	Is the panel builder's responsibility.
10.8 CONNECTIONS FOR EXTERNAL CONDUCTORS	Is the panel builder's responsibility.
10.9.2 POWER-FREQUENCY ELECTRIC STRENGTH	Is the panel builder's responsibility.
10.9.3 IMPULSE WITHSTAND VOLTAGE	Is the panel builder's responsibility.
10.9.4 TESTING OF ENCLOSURES MADE OF INSULATING MATERIAL	Is the panel builder's responsibility.
EQUIPMENT HEAT DISSIPATION, CURRENT-DEPENDENT PVID	0 W
HEAT DISSIPATION CAPACITY PDISS	0 W
HEAT DISSIPATION PER POLE, CURRENT-DEPENDENT PVID	0.11 W
RATED OPERATIONAL CURRENT FOR SPECIFIED HEAT DISSIPATION (IN)	6 A
STATIC HEAT DISSIPATION, NON-CURRENT-DEPENDENT PVS	0 W

Features & functions

ELECTRIC CONNECTION TYPE	Screw connection
---------------------------------	------------------

General information

DEGREE OF PROTECTION	IP20
MODEL	Top mounting
OPERATING TORQUE	0.8 Nm
OVERVOLTAGE CATEGORY	III
POLLUTION DEGREE	3
RATED IMPULSE WITHSTAND VOLTAGE (UIMP)	6000 V AC

Mounting details

CONNECTION TYPE	Front fixing
	Screw connection
MOUNTING METHOD	Front fastening

Terminal capacities

TERMINAL CAPACITY (FLEXIBLE WITH FERRULE)	0.5 - 1.5 mm ²
TERMINAL CAPACITY (SOLID)	0.75 - 2.5 mm ²
TERMINAL CAPACITY (STRANDED)	0.5 - 2.5 mm ²

Short-circuit rating

**RATED CONDITIONAL
SHORT-CIRCUIT CURRENT
(IQ)** 1 kA

SHORT-CIRCUIT PROTECTION	PKZM0-10/FAZ-B6/1, Contacts, Max. short- circuit protective device, Fuseless
-------------------------------------	---

SHORT-CIRCUIT PROTECTION RATING	Max. 10 A gG/gL, Fuse, Contacts
--	------------------------------------

Resources

CATALOGUES	eaton-pushbuttons-signal-towers-sensors-assortment-overview-catalog-ca047003en-en-us.pdf
------------	--

CERTIFICATION REPORTS	000Z425
--------------------------	-------------------------

CONTROL TRAVEL DIAGRAM	eaton-operating-diagram-m22-contact-element-contact-travel-diagram-009.eps
---------------------------	--

DECLARATIONS OF CONFORMITY	eaton-accessory-declaration-of-conformity-uk251351en.pdf
	eaton-assembled-contact-element-and-mounting-adapter-declaration-of-conformity-eu260061en.pdf
	eaton-contact-element-declaration-of-conformity-eu251539en.pdf
	eaton-contact-element-declaration-of-conformity-uk260062en.pdf

DRAWINGS	eaton-operating-actuation-m22-led-element-dimensions.eps
----------	--

eaton-operating-m22-contact-element-3d-drawing.eps
eaton-general-standards-000Z425.jpg
eaton-operating-m22-contact-element-symbol-002.eps

ECAD MODEL	ETN.121474.edz
------------	--------------------------------

INSTALLATION INSTRUCTIONS	IL04716005Z.pdf IL04716002Z
------------------------------	---

MCAD MODEL	kontaktelement_safety_front_2.stp
	eaton-cont-blocks-mcad-drawings-kontakt-safety-front-2.dwg

PROJECT NAME:

PROJECT NUMBER:

PREPARED BY:

DATE:



Eaton Corporation plc Eaton House
30 Pembroke Road
Dublin 4, Ireland
Eaton.com

© 2026 Eaton. All Rights Reserved.

Follow us on social media to get the latest product and support information.

