


# Specifications

## Eaton 292424

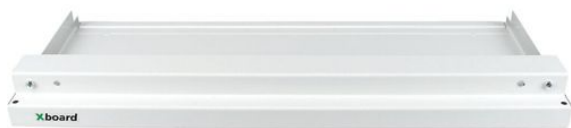

Eaton xEnergy Basic LV systems Low voltage switchgear. Top/Bottom-panel for Surface-Mounting Installation distribution board, blind, WxD=800x249mm, white

### General specifications

|                             |                                              |
|-----------------------------|----------------------------------------------|
| <b>PRODUCT NAME</b>         | Eaton xEnergy Basic top-/floor cover element |
| <b>CATALOG NUMBER</b>       | 292424                                       |
| <b>MODEL CODE</b>           | BP-TBP-800-BL-W                              |
| <b>EAN</b>                  | 4015082924249                                |
| <b>PRODUCT LENGTH/DEPTH</b> | 250 mm                                       |
| <b>PRODUCT HEIGHT</b>       | 55 mm                                        |
| <b>PRODUCT WIDTH</b>        | 800 mm                                       |
| <b>PRODUCT WEIGHT</b>       | 5.3 kg                                       |
| <b>COMPLIANCES</b>          | RoHS conform                                 |

## Additional information

|                     |                                  |
|---------------------|----------------------------------|
| <b>RAL-NUMBER</b>   | 9016                             |
| <b>SUITABLE FOR</b> | Bottom planking<br>Roof planking |

## Technical data - mechanical

|                                                     |                                       |
|-----------------------------------------------------|---------------------------------------|
| <b>CABLE ENTRY TYPE</b>                             | Closed                                |
| <b>HOUSING MATERIAL</b>                             | Sheet steel                           |
| <b>MATERIAL</b>                                     | Steel                                 |
| <b>MOUNTING METHOD</b>                              | Surface mounting                      |
| <b>SUITABLE FOR ENCLOSURE BUILDING LENGTH/DEPTH</b> | 249 mm                                |
| <b>SUITABLE FOR ENCLOSURE BUILDING WIDTH</b>        | 800 mm                                |
| <b>SUITABLE FOR LENGTH/DEPTH</b>                    | 249 mm                                |
| <b>SUITABLE FOR WIDTH</b>                           | 800 mm                                |
| <b>SURFACE FINISHING</b>                            | Powder coating<br>With powder coating |
| <b>DEGREE OF PROTECTION</b>                         | IP30                                  |

## Delivery programme

|              |                                   |
|--------------|-----------------------------------|
| <b>COLOR</b> | Traffic white (RAL 9016)<br>White |
| <b>TYPE</b>  | Additional equipment              |

## Resources

|                    |                                                                                      |
|--------------------|--------------------------------------------------------------------------------------|
| <b>BROCHURES</b>   | <a href="#">eaton-xenergy-basic-light-brochure-br014024-en-us.pdf</a>                |
| <b>CATALOGUES</b>  | <a href="#">eaton-distribution-boards-xenergy-basic-catalog-ca014010en-en-us.pdf</a> |
| <b>FLYERS</b>      | <a href="#">eaton-xenergy-basic-profisnap-flyer-fl019008en-en-us.pdf</a>             |
| <b>SALES NOTES</b> | <a href="#">eaton-f3a-flange-flyer-fl019005en-en-us.pdf</a>                          |

**PROJECT NAME:**

**PROJECT NUMBER:**

**PREPARED BY:**

**DATE:**



**Eaton Corporation plc** Eaton House  
30 Pembroke Road  
Dublin 4, Ireland  
Eaton.com

© 2026 Eaton. All Rights Reserved.

Follow us on social media to get the latest product and support information.

