


Quick Reference Guide



A Fluke Company

XLD Rotary Laser Detector

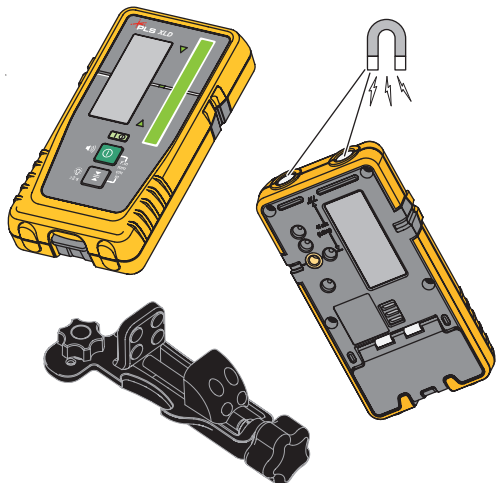


①	
 1x	
 ≥ 2 s	

				
	F.in	1/8	1/4	1/2
	mm	1.0	2.0	5.0
	cm	0.1	0.2	0.5
	in	0.05	0.1	0.2


 + 	F.IN → mm → cm → in
 1x	 → 
 2x / 1s	1.0 → 2.0 → 5.0
 ≥ 2 s 	 / 




1




2




3

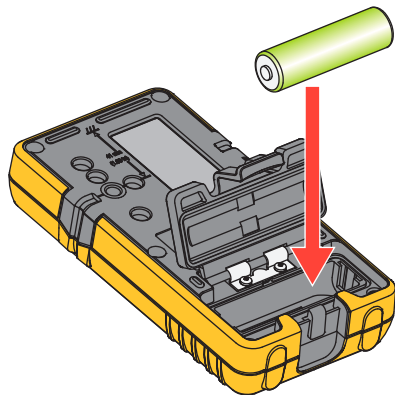

1



2



3

