


drylin® R liner A160UM-01

A160UM-01-12

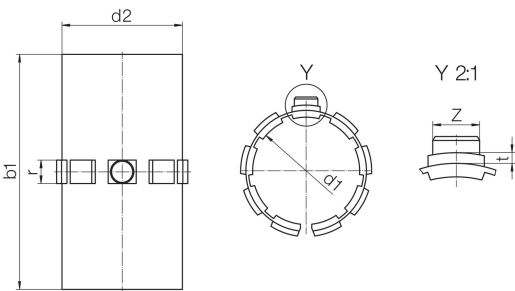

drylin® R liner A160UM-01

- Material: iglidur® A160
- Design: Enclosed housing, long type
- Compliant with FDA and EU regulations in regards to chemicals and food (FDA-/EU10/2011 EC compliant)

Product description

Introducing the drylin® R liner A160UM-01, designed for reliability and safety. Made from iglidur® A160 material, this enclosed housing features a long design, ensuring durability in various applications. It meets FDA and EU regulations for chemicals and food safety, making it an ideal choice for industries where compliance is crucial. Trust the drylin® R liner A160UM-01 for your needs, combining quality and regulatory adherence seamlessly.

Requirements

Mould-resistant according to DIN EN ISO 846 Procedure A	No
---	----

Physical properties

Max. long-term application temperature	90 °C
Lower application temperature	-50 °C

Manufacturing and installation tolerances

d1 tolerance	+0.030 +0.070mm
--------------	-----------------

Dimensions

Ø d1	12 mm
Ø d2	14 mm
b1	31 mm
r	3 mm
t	0.8 mm
Ø z	3 mm



Certificates and standards



Additional information and diagrams

