


drylin® R liner A180UM-01

A180UM-01-10

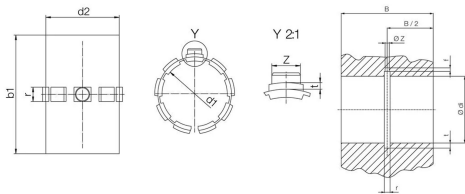

drylin® R liner A180UM-01

- Material: iglidur® A180
- Version: Enclosed housing, long design

r	3 mm
Ø z	2.5 mm
Ø d1	10 mm
t	0.8 mm
Ø d2	12 mm
b1	28 mm

Product description

Introducing the drylin® R liner A180UM-01 from the trusted brand igus®. This enclosed housing features a long design, crafted from durable iglidur® A180 material. Ideal for various applications, it provides reliable performance and longevity. Enhance your projects with the quality and innovation of the drylin® R liner series, designed to meet your needs efficiently.

Requirements

Mould-resistant according to DIN EN ISO 846 Procedure A	No
---	----

Physical properties

Max. long-term application temperature	90 °C
Lower application temperature	-50 °C

Dimensions

Ø d1	10 mm
Ø d2	12 mm
b1	28 mm
r	3 mm
t	0.8 mm
Ø z	2.5 mm



Certificates and standards



Additional information and diagrams

