


drylin® R aluminium shaft, supported, AWUI, EN
AW 6061/6060, imperial

AWUI-08

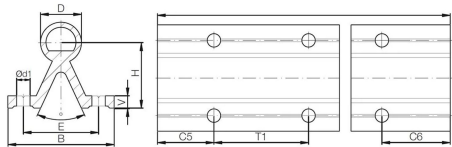

V	0.19 in
E	1 in
Pitch T	4 in
max. length	144 in
B	1.5 in
Ø d1	0.169 in
H	1.125 in
C5/C6 (min.)	12 in
C5/C6 (max.)	95 in
Outer diameter d	0.5 in

Product description

Introducing the drylin R aluminium shaft, supported AWUI, crafted from durable EN AW 6061/6060 aluminium. This reliable shaft is designed for optimal performance and longevity, making it an excellent choice for various applications. Its imperial sizing ensures compatibility with a wide range of setups. Elevate your projects with the strength and versatility of the drylin R aluminium shaft.

Manufacturing and installation tolerances

d tolerance	-0.006 inch
-------------	-------------

General properties

Material	Aluminum
Surface hardness	550 HV
Surface roughness Ra	< 0,6 µm
Roundness	≤ 1/2 diameter tolerance
Drilling pattern	Standard



Dimensions

Outer diameter d	0.5 in
Ø d1	0.169 in
B	1.5 in
V	0.19 in
E	1 in
Pitch T	4 in
C5/C6 (min.)	12 in
C5/C6 (max.)	95 in
max. length	144 in
Angle Y	30 °
V	0.19 in