
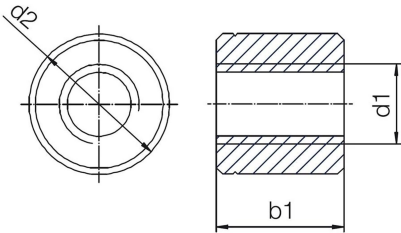


dryspin® lead screw nut with flat spanner, high-helix thread, RSLM

DST-RSLM-17220DS10X2



dryspin® lead screw nut with flat spanner, high-helix thread, RSLM

- Material: iglidur® R
- Thread direction: Left-hand thread
- Thread type: High helix thread dryspin®
- Design: Standard
- Cylindrical lead screw nut

Product description

Introducing the dryspin lead screw nut with flat spanner, crafted from high-performance iglidur R polymer. This nut is designed for medium to high speeds, offering exceptional vibration dampening for a quiet and smooth operation. With high wear resistance and a temperature range of up to +90°C, it ensures durability in various conditions. Its unique high-helix thread design enhances performance, making it an ideal choice for applications requiring reliable and maintenance-free solutions. Experience the difference with dryspin technology.

Requirements

Mould-resistant according to DIN EN ISO 846 Procedure A	No
---	----

General properties

Thread direction	Left-hand thread
Thread type	High helix thread dryspin; highest efficiency
Weight	18.26 g
With spanner flat	Yes

Dimensions

Thread size	DS10X2
Ø d1	10 mm
Ø d2	22 mm
b1	20 mm
Effective supporting surface	301.4 mm²
SW	17 mm