


drylin® R liner E7UM-02

E7UM-02-10

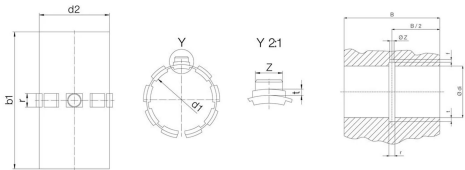

drylin® R liner E7UM-02

- Material: iglidur® E7
- Version: Enclosed, short design
- ‘Endurance runner’ with up to 8x longer service life on steel shafts

B	26 mm
Ø z	2.5 mm
t	0.8 mm
Ø d1	10 mm
Ø d2	12 mm
r	3 mm
Ø Z1	2.6 mm
f1	1 mm
t1	1 mm
Part number	E7UM-02-10
b1	25 mm
Ø di	12 mm

Product description

Introducing the drylin R liner E7UM-02, a reliable solution from the trusted brand drylin. Crafted from iglidur E7 material, this enclosed, short design offers durability and efficiency for various applications. Experience the perfect blend of performance and innovation with the drylin R liner E7UM-02, designed to meet your needs with ease.

Requirements

Mould-resistant according to DIN EN ISO 846 Procedure A	No
---	----

Physical properties

Max. long-term application temperature	70 °C
Lower application temperature	-50 °C



Manufacturing and installation tolerances

d1 tolerance	+0.030 +0.070mm
di tolerance	H7
B tolerance	h10
r1 tolerance	+0,5 mm
t1 tolerance	+0,1 mm
f1 tolerance	+0,5 mm

Dimensions

Ø d1	10 mm
Ø d2	12 mm
b1	25 mm
r	3 mm
t	0.8 mm
Ø z	2.5 mm
Ø di	12 mm
B	26 mm
t1	1 mm
f1	1 mm
Ø Z1	2.6 mm

Certificates and standards

