


drylin® R stainless steel shaft | low supported |
EWUMN | 1.4112
EWUMN-12

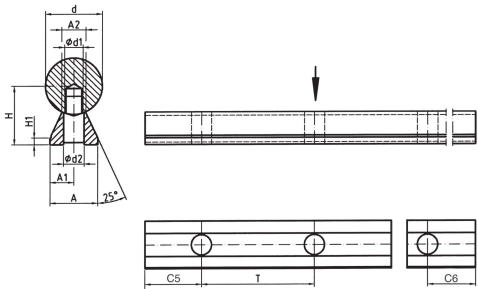

drylin® R stainless steel shaft | low supported |
EWUMN | 1.4112

- High corrosion resistance
- High chemical resistance
- Ideal solution for wet applications
- Stainless steel AISI 440B (high grade steel)
- Aluminium support

A2	5.4 mm
H1	3 mm
Ø d2	4.5 mm
A1	5.5 mm
Part number	EWUMN-12
Pitch T	75 mm
H	14.5 mm
C5/C6 (min.)	20 mm
C5/C6 (max.)	57 mm
A	11 mm

Product description

Introducing the drylin® R stainless steel shaft, low supported, EWUMN, 1.4112. Crafted from high-grade stainless steel AISI 440B, this shaft offers exceptional corrosion and chemical resistance, making it the ideal solution for wet applications. Its durable aluminum support enhances its reliability, ensuring long-lasting performance. Choose this stainless steel shaft for a robust and dependable option in challenging environments.

Manufacturing and installation tolerances

d tolerance	h6
H-tolerance	±0,02 mm

General properties

Material	Supported
Drilling pattern	Standard



Dimensions

Outer diameter d	12 mm
B	11 mm
Pitch T	75 mm
C5/C6 (min.)	20 mm
C5/C6 (max.)	57 mm
max. length	6000 mm
A	11 mm
A1	5.5 mm
A2	5.4 mm

Certificates and standards



Additional information and diagrams

