


drylin® R stainless steel shaft, low supported,
EWUMSN, 316 stainless steel (1.4571/AISI 316 Ti)
EWUMSN-ES-12

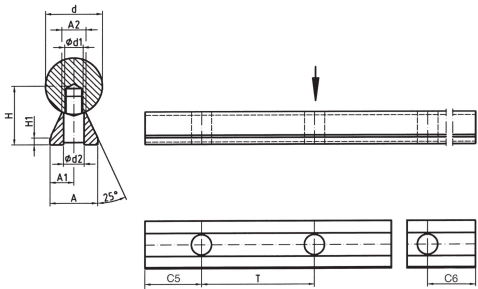

drylin® R stainless steel shaft, low supported,
EWUMSN, 316 stainless steel (1.4571/AISI 316
Ti)

- High corrosion resistance
- High chemical resistance
- Ideal solution for wet applications
- Stainless steel 316 stainless steel (1.4571/AISI 316 Ti)

A2	5.4 mm
H1	3 mm
Ø d2	4.2 mm
A1	5.5 mm
Part number	EWUMSN-ES-12
H	14.5 mm
C5/C6 (min.)	20 mm
C5/C6 (max.)	57 mm
A	11 mm

Product description

Introducing the drylin R stainless steel shaft, model EWUMSN, crafted from high-quality 316 stainless steel (1.4571/AISI 316 Ti). This low supported shaft offers exceptional corrosion and chemical resistance, making it the ideal solution for wet applications. Designed for durability and reliability, it ensures optimal performance in challenging environments. Upgrade your projects with this robust and resilient component that meets your demanding needs.

General properties

Material	Stainless steel 316 stainless steel (1.4571/AISI 316 Ti)
Drilling pattern	Standard

Dimensions

Outer diameter d	12 mm
C5/C6 (min.)	20 mm
C5/C6 (max.)	57 mm
max. length	6000 mm
A	11 mm
A1	5.5 mm
A2	5.4 mm



Additional information and diagrams

