


iglidur® tribo-tape liner, F160, mm

F160-T-005-0020

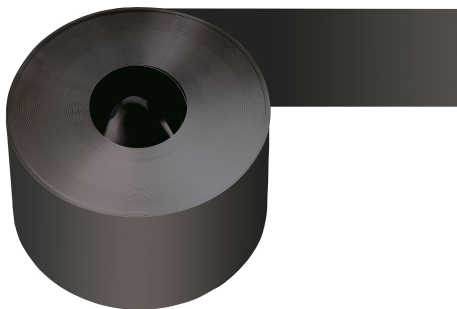

iglidur® tribo-tape liner, F160, mm

- ESD protection
- Wear-resistant
- Low coefficient of friction
- Optimised transport
- Protection of products

Product description

Introducing the iglidur tribo-tape liner, F160, mm, designed to enhance your operations with ESD protection and a low coefficient of friction. This innovative liner optimizes transport while safeguarding your products from damage. It's a cost-effective solution that prevents component destruction, ensuring longevity and reliability. Upgrade your setup with this essential addition to your toolkit.

Requirements

FDA compliant	No
EU 10/2011 compliant	No
High temperatures	No

Dimensions

Thickness	0.5 mm
Width	20 mm

Thermal properties

Max. long-term application temperature	90 °C
Max. short-term application temperature	100 °C
Lower application temperature	-50 °C



Mechanical properties

Flexural strength (at 20°C/68°F)	24 MPa
Flexural strength (at 20°C/68°F) test method	Test method DIN EN ISO 178
Shore D hardness	62.0000
Max. recommended surface pressure	16 MPa

General properties

Design	without adhesive tape
Colour	black
Max. total moisture absorption	0.3 Wt.-%