


Coupling joint

Coupling joint without threaded ball stud

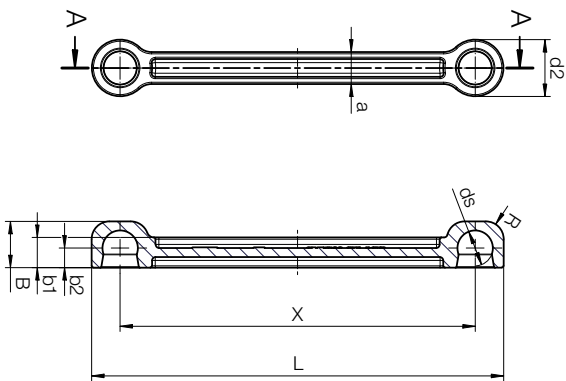

100mm long, lightweight, free from corrosion and maintenance

With a centre distance of 100mm and ball studs with an M6 thread, the most popular coupling joint is now also available as an injection moulded part made from igumid® G. It offers freedom from corrosion, vibration damping, high precision, insensitivity to dust and dirt and a long service life under high dynamic loads.

- No readjustment necessary
- No maintenance costs
- Static tensile strength up to 1,300N
- 100% lubrication-free, no need to use additional lubricants

Technical data

Part No.	Max. static tensile strength	Max. static tensile strength
	Short-term	Long-term
	[N]	[N]
GPZM-06-100	1,300	650

Product range

Part No.	X	L	b1	b2	B	ds	d2	a	R
	[mm]	[mm]	[mm]	[mm]	[mm]	[Ø]	[Ø]	[mm]	[mm]
GPZM-06-100	100.0	116.0	8.5	5.5	13.0	10.0	16.0	9.0	5.0