


Coupling joint

Coupling joint with threaded ball stud

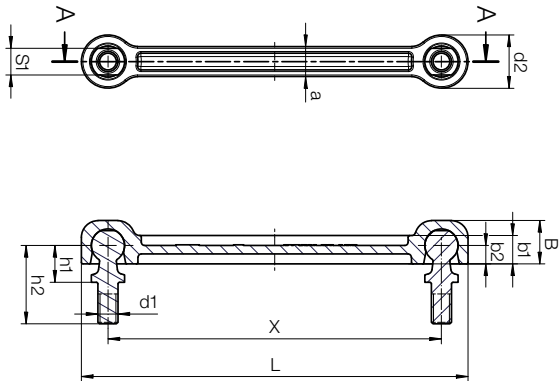

100mm long, lightweight, free from corrosion and maintenance

Coupling joints with threaded pins connect undercarriage parts, ensuring stability and precision. They are robust, durable, lubrication-free, insensitive to dirt and easy to install.

- No readjustment necessary
- No maintenance costs
- Static tensile strength up to 1,300N
- 100% lubrication-free, no need to use additional lubricants

Technical data

Part No.	Max. static tensile strength	Max. static tensile strength
	Short-term	Long-term
	[N]	[N]
GPZM-06-100-MS	1,300	650
GPZM-06-100-ES	1,300	650

Product range

Part No.	ds	d2	X	L	h1	h2	b1	b2	B	S1	a
	[Ø]	[Ø]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]		[mm]
GPZM-06-100-MS	M6	16.0	100.0	116.0	11.0	23.5	8.5	5.5	13.0	SW8	9.0
GPZM-06-100-ES	M6	16.0	100.0	116.0	11.0	23.5	8.5	5.5	13.0	SW8	9.0