
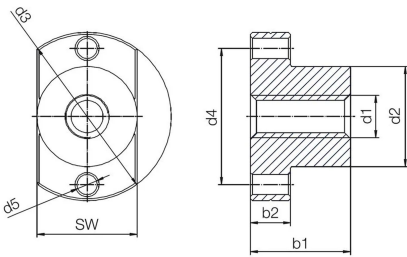


drylin® flange lead screw nut with spanner flat,
thermoplastic ACME, J350FRI

J350FRI-02-1-5



drylin® flange lead screw nut with spanner flat,
thermoplastic ACME, J350FRI

- Material: iglide® J350
- Thread direction: Right-hand thread
- Thread type: ACME
- Design: Standard
- With spanner flat
- Cylindrical lead screw nut with flange

Product description

Introducing the drylin flange lead screw nut with spanner flat from igus. Crafted from high-performance iglidur J350 thermoplastic, this nut is designed for durability in temperatures up to +150°C. It offers excellent dimensional stability, is lubrication-free, and maintenance-free, ensuring quiet and reliable operation. With its robust construction, it withstands high loads and is resistant to chemicals and wear. Ideal for various applications, this lead screw nut combines efficiency and resilience for your engineering needs.

Requirements

Mould-resistant according to DIN EN ISO 846 Procedure A	Yes
---	-----

General properties

Thread direction	Right-hand thread
Thread type	ACME; US standard
With spanner flat	Yes
Weight	278.85 g



Dimensions

Thread size	1-5
Ø d1	1 in
Ø d2	1.5 in
Ø d3	2.5 in
Ø d4	2 in
Ø d5	0.28 in
b2	0.59 in