


drylin® trapezoidal lead screw nut with flange,
multi start, JFLM

JFLM-2835TR12X6P3

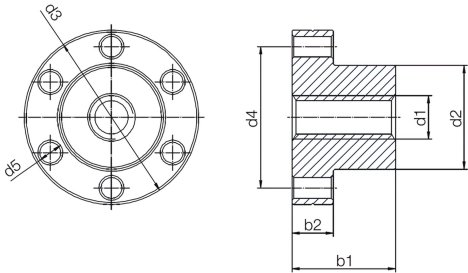

drylin® trapezoidal lead screw nut with flange,
multi start, JFLM

- Material: iglide® J
- Thread direction: Left-hand thread
- Thread type: Trapezoidal threads
- Design: Standard
- Cylindrical lead screw nut with flange
- Multi start

Product description

Introducing the drylin trapezoidal lead screw nut with flange, multi start, JFLM by igus. Made from high-performance iglidur J polymer, this lead screw nut ensures high efficiency across all speeds. It features a low coefficient of friction for minimal wear, making it durable and maintenance-free. With a temperature range of -20°C to +90°C, it's ideal for various applications. Enjoy quiet, vibration-free operation and chemical resistance in a robust design, perfect for demanding environments.

Requirements

Mould-resistant according to DIN EN ISO 846 Procedure A	No
---	----

Thermal properties

Efficiency [η]	37-60
----------------	-------

General properties

Thread direction	Left-hand thread
Thread type	Trapezoidal threads; absorption of larger axial forces
With spanner flat	No
Weight	45.2 g



Dimensions

Thread size	TR12X6P3
Ø d1	12 mm
Ø d2	28 mm
Ø d3	48 mm
Ø d4	38 mm
Ø d5	6 mm
b1	35 mm
b2	12 mm