
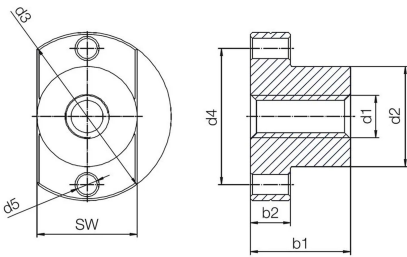


drylin® flange lead screw nut with spanner flat,
thermoplastic ACME, JFRI

JFRI-02-3/8-12



drylin® flange lead screw nut with spanner flat,
thermoplastic ACME, JFRI

- Material: iglide® J
- Thread direction: Right-hand thread
- Thread type: ACME
- Design: Standard
- With spanner flat
- Cylindrical lead screw nut with flange

Product description

Introducing the drylin flange lead screw nut with spanner flat from igus. Crafted from high-performance iglidur J thermoplastic, this lead screw nut offers exceptional efficiency at all speeds. It features a low coefficient of friction for reduced wear and operates effectively in temperatures up to +90°C. Enjoy a lubrication-free, maintenance-free experience with robust durability, chemical resistance, and quiet operation. Ideal for various applications, this nut is designed for high performance and longevity.

Requirements

Mould-resistant according to DIN EN ISO 846 Procedure A	Yes
---	-----

General properties

Thread direction	Right-hand thread
Thread type	ACME; US standard
With spanner flat	Yes
Weight	22.96 g



Dimensions

Thread size	3/8-12
Ø d1	0.38 in
Ø d2	1 in
Ø d3	1.63 in
Ø d4	1.3125 in
Ø d5	0.2 in
b2	0.38 in