
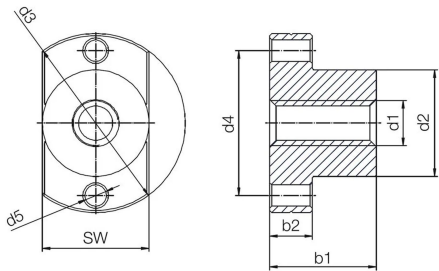


drylin® flange lead screw nut with spanner flat,
metric thread, JFRM

JFRM-090913M5



drylin® flange lead screw nut with spanner flat,
metric thread, JFRM

- Material: iglide® J
- Thread direction: Right-hand thread
- Thread type: metric thread
- Design: Standard
- Cylindrical lead screw nut with flange

Product description

Introducing the drylin flange lead screw nut with spanner flat, part of the drylin family by igus. Crafted from high-performance iglidur J polymer, this nut ensures high efficiency at all speeds. It features a low coefficient of friction for minimal wear and operates effectively in temperatures up to +90°C. Enjoy a lubrication-free, maintenance-free experience with durable, chemical-resistant construction. Ideal for various applications, this nut guarantees quiet and vibration-free operation, making it a reliable choice for your needs.

Requirements

Mould-resistant according to DIN EN ISO 846 Procedure A	Yes
---	-----

Thermal properties

Efficiency [η]	17-34
----------------	-------

General properties

Thread direction	Right-hand thread
Thread type	Metric thread; standard for highest compatibility
With spanner flat	Yes
Weight	1.2 g



Dimensions

Thread size	M5
Ø d1	5 mm
Ø d2	9 mm
Ø d3	18 mm
Ø d4	15.2 mm
Ø d5	3.2 mm
b1	13 mm
b2	3 mm