
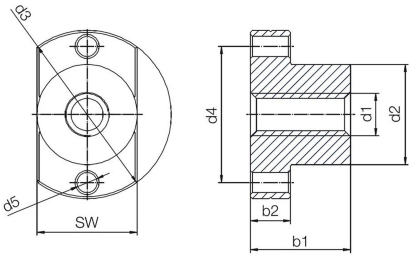


drylin® flange lead screw nut with spanner flat,
trapezoidal thread, JFRM

JFRM-252525TR10X2



drylin® flange lead screw nut with spanner flat,
trapezoidal thread, JFRM

- Material: iglide® J
- Thread direction: Right-hand thread
- Thread type: Trapezoidal threads
- Design: Standard
- Cylindrical lead screw nut with flange
- With spanner flat

Product description

Introducing the drylin flange lead screw nut with spanner flat, designed for high efficiency at all speeds. Made from iglidur J, this robust nut features a low coefficient of friction, ensuring minimal wear. It operates effectively in temperatures up to +90°C and is 100% lubrication-free, making it durable and maintenance-free. With its trapezoidal thread design, this cylindrical lead screw nut is perfect for various applications, providing quiet and vibration-free performance.

Requirements

Mould-resistant according to DIN EN ISO 846 Procedure A	Yes
---	-----

Thermal properties

Efficiency [η]	20-39
----------------	-------

General properties

Thread direction	Right-hand thread
Thread type	Trapezoidal threads; absorption of larger axial forces
With spanner flat	Yes
Weight	22.37 g



Dimensions

Thread size	TR10X2
Ø d1	10 mm
Ø d2	25 mm
Ø d3	42 mm
Ø d4	34 mm
Ø d5	5 mm
b2	10 mm