


drylin® trapezoidal lead screw nut with flange,
multi start, JFRM

JFRM-2835TR12X6P3

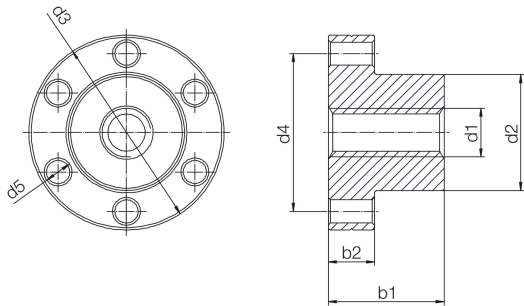

drylin® trapezoidal lead screw nut with flange,
multi start, JFRM

- Material: iglide® J
- Thread direction: Right-hand thread
- Thread type: Trapezoidal threads
- Design: Standard
- Cylindrical lead screw nut with flange
- Multi start

Product description

Introducing the drylin trapezoidal lead screw nut with flange, multi start, JFRM by igus. Crafted from high-performance iglidur J material, this lead screw nut ensures high efficiency across various speeds. Enjoy a low coefficient of friction for reduced wear, and benefit from its durability in challenging environments. With a design that is 100% lubrication-free and maintenance-free, it withstands temperatures from -20°C to +150°C. Experience quiet, vibration-free operation with this reliable solution for your applications.

Requirements

Mould-resistant according to DIN EN ISO 846 Procedure A	Yes
---	-----

Thermal properties

Efficiency [η]	37-60
----------------	-------

General properties

Thread direction	Right-hand thread
Thread type	Trapezoidal threads; absorption of larger axial forces
With spanner flat	No
Weight	141.75 g



Dimensions

Thread size	TR12X6P3
Ø d1	12 mm
Ø d2	28 mm
Ø d3	48 mm
Ø d4	38 mm
Ø d5	6 mm
b1	35 mm
b2	12 mm